




THRESHOLDS & WEATHERSTRIPPING

THERMAL BARRIER PANIC THRESHOLDS (CONTINUED)

518S

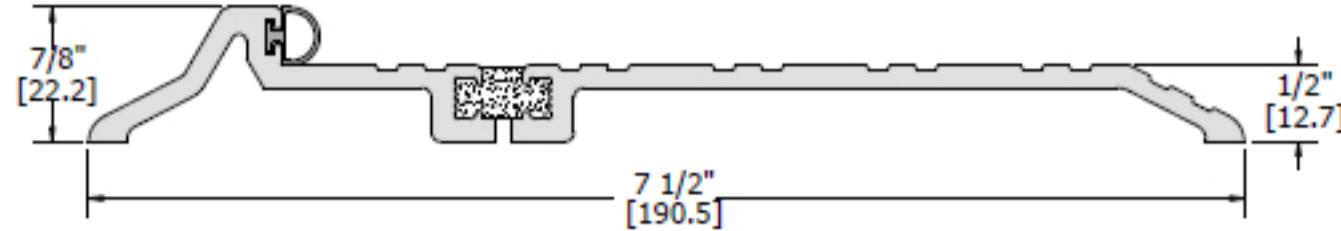

Finishes: MIL, DBA, GLD

Inserts: V, N, S, W

Certifications:



UBC
7.2
1997
PART 1

INTERLOCKING THRESHOLDS

Threshold interlocks with hook on the bottom of the door for a superior seal against wind and rain


Fasteners: #10 x 1-1/2" Flat head sheet metal screws, other screw types and anchors available upon request

Options: Available with Sure Step non-slip abrasive coating

Notes:

- MIL finish thresholds are supplied with zinc plated screws
- Brass thresholds are supplied with brass screws
- Color anodized thresholds are supplied with screws plated to match
- Thresholds are supplied with the 701S J-Hook

600S

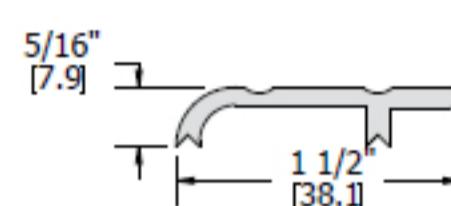


Finishes: MIL, DBA, GLD

Certifications:



UBC
7.2
1997
PART 1

602S

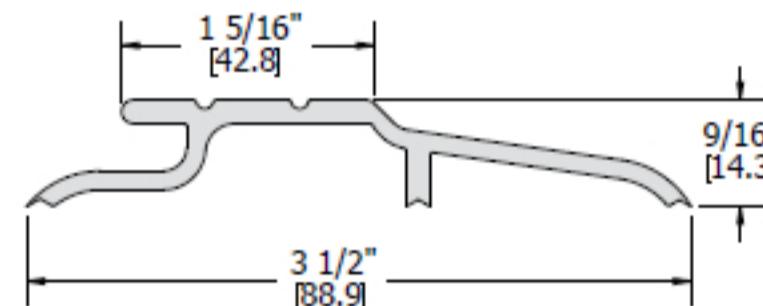


Finishes: MIL, DBA, MIB

Certifications:



UBC
7.2
1997
PART 1

603S

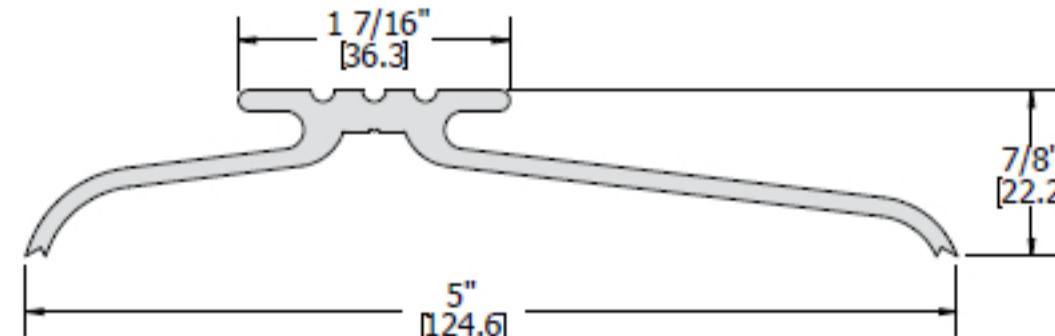

Finishes: MIL, DBA, MIB

Certifications:



UBC
7.2
1997
PART 1




THRESHOLDS & WEATHERSTRIPPING



INTERLOCKING THRESHOLDS (CONTINUED)

604S

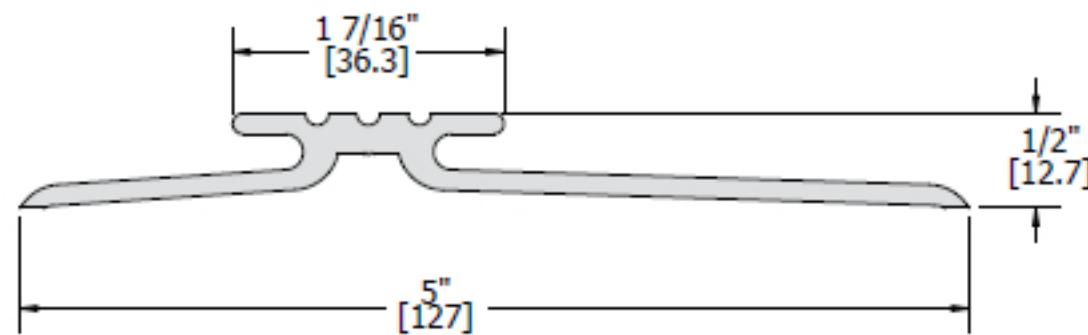

Finishes:


MIL, DBA, MIB

Certifications:




UBC 7.2 1997 PART 1

608S

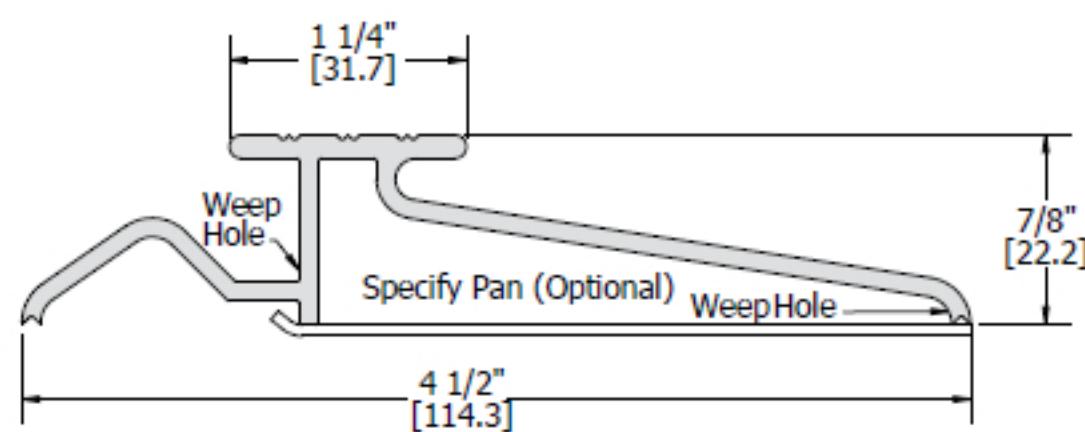

612S

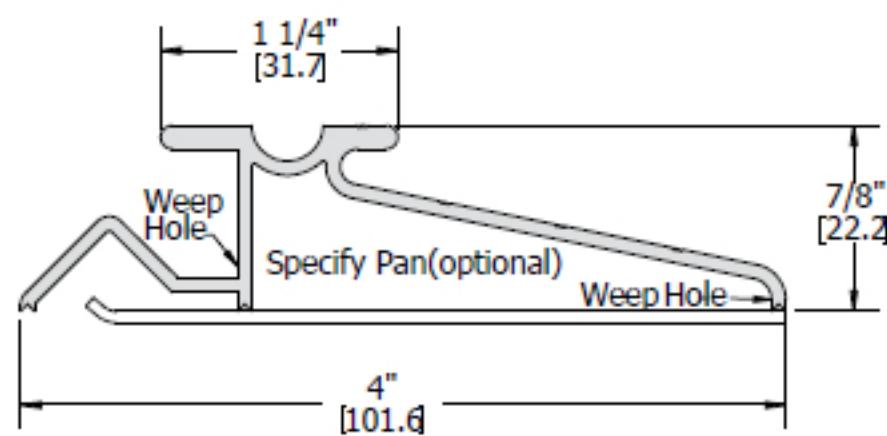

Finishes:

MIL, DBA, GLD (612S only), MIB

Certifications:




- Water return feature designed to catch water and return it to the outside through weep holes
- Optional pan keeps water from coming in contact with the floor

Order:

Specify "with pan" when ordering

701S

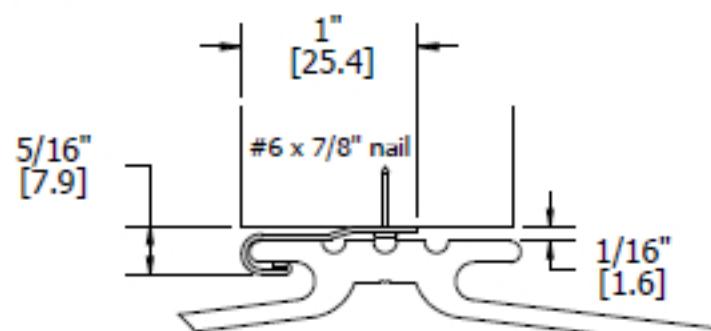

Finishes:

MIL, MIB

Fasteners:

#6 x 7/8" nail

Certifications:



Notes:

J-Hook interlocks with threshold to seal against wind and rain

ABRASIVE CAST ALUMINUM THRESHOLDS

A heavy duty aluminum threshold with silicon carbide granules integrally cast into the surface. Ideal for high traffic areas where maximum durability is required. The abrasive, skid resistant surface works well under wet, dry or oily conditions.


Fasteners: #14 x 1-1/2" Flat head zinc plated sheet metal screws with lead anchor

Options: Cast-on anchors available upon request

Notes:

- Furnished with countersunk holes
- Cut with a reinforced abrasive plain surface disk, 1/8" thick, either aluminum oxide or silicon carbide
- Maximum length available is 8 feet, not available for floor closers
- Available in 4", 5" and 6" widths

620S

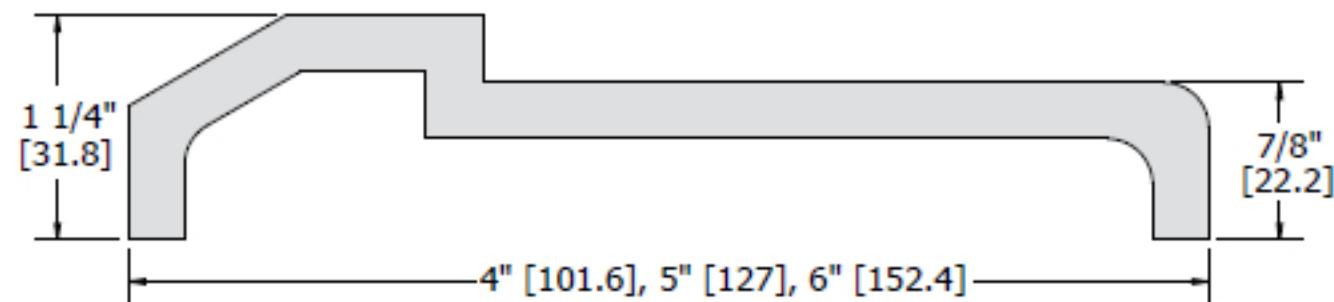


Finishes:

CAL

Certifications:



621S

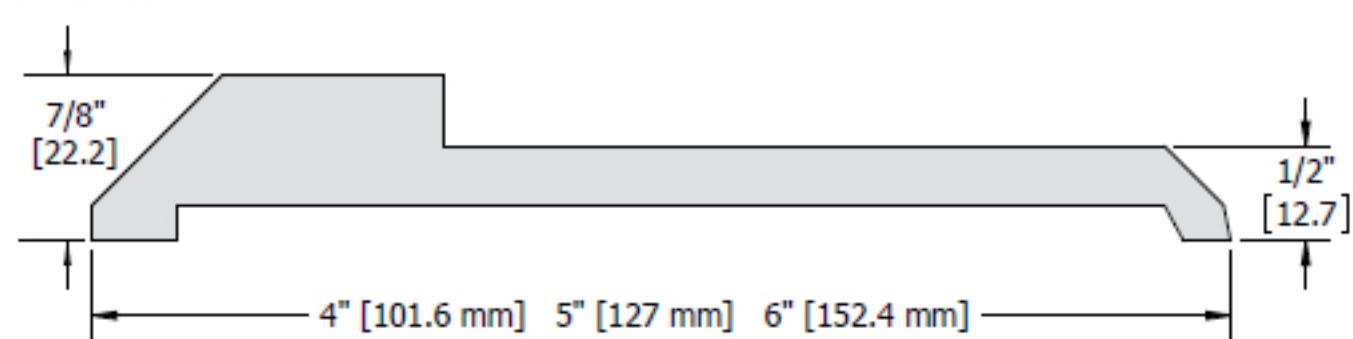


Finishes:

CAL

Certifications:



622S

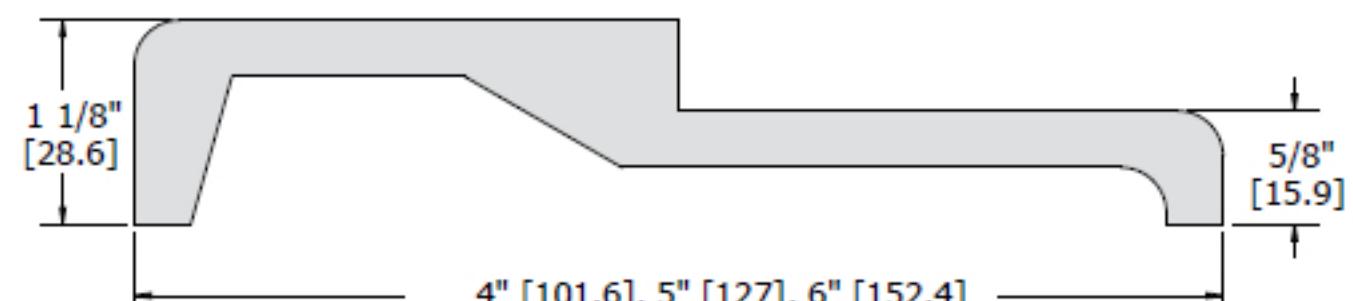

Finishes:

CAL

Certifications:

