




NOSINGS

A heavy duty safety nosing with silicon carbide granules integrally cast into the surface. Designed for new construction of poured concrete, Terrazzo or Steel Pan cement filled stairs. Prevents breaking and chipping of stair edge.


- Fasteners: #14 x 1-1/2" flat head zinc plated sheet metal screws with lead anchor
- Options: Cast-on anchors available upon request
- Notes:
- Furnished with countersunk holes
 - Cross hatch surface
 - Cut with a reinforced abrasive disk, 1/8" thick, either aluminum oxide or silicon carbide
 - Maximum length available is 8', except 6" widths which are 7' maximum
 - Available in 3", 4", and 6" widths

640S

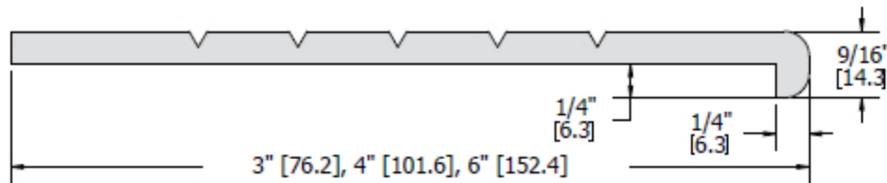


- Finishes: CAL
- Certifications:

641S

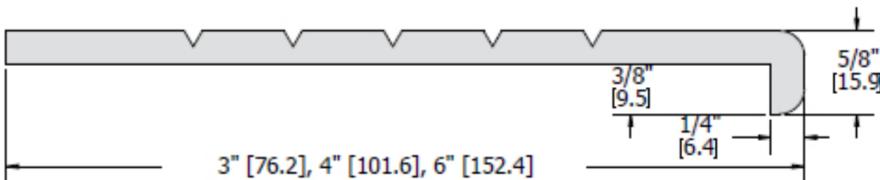

- Finishes: CAL
- Certifications:

642S

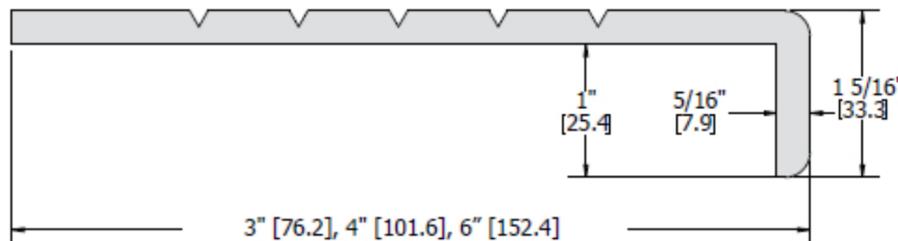

- Finishes: CAL
- Certifications:


COVER PLATE ASSEMBLY THRESHOLDS

Used with floor closers either center or offset hung, single/double door application

- Fasteners: #10 x 1-1/2" flat head sheet metal screws, other screw types and anchors available upon request
- Options: Available with Sure Step non-slip abrasive coating
- Order: Specify closer manufacturer, offset, closer model number, thickness of door, width of door opening and handing
- Notes:
- MIL finish thresholds are supplied with zinc plated screws
 - Brass thresholds are supplied with brass screws
 - Color anodized thresholds are supplied with screws plated to match

651S


1/2" x 7"
[12.7 x 177.8]

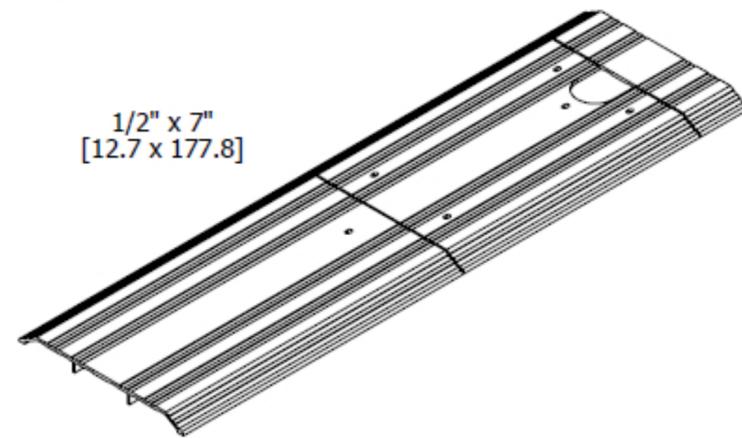

- Finishes: MIL, DBA, MIB
- Certifications:
- Notes:
- Center hung
 - Without mitered ends

652S

1/2" x 5"
[12.7 x 127]

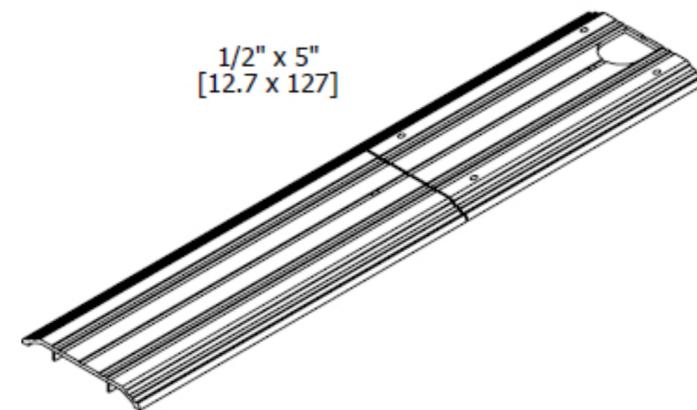

- Finishes: MIL, DBA, MIB
- Certifications:
- Notes:
- Center hung
 - Without mitered ends