

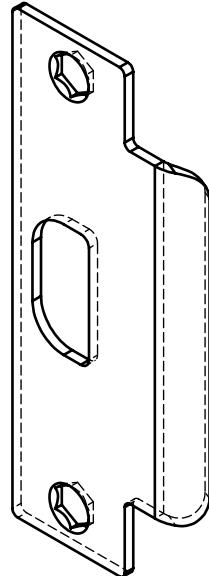


**3935 ASA STRIKE  
METAL JAMB PREP TEMPLATE**

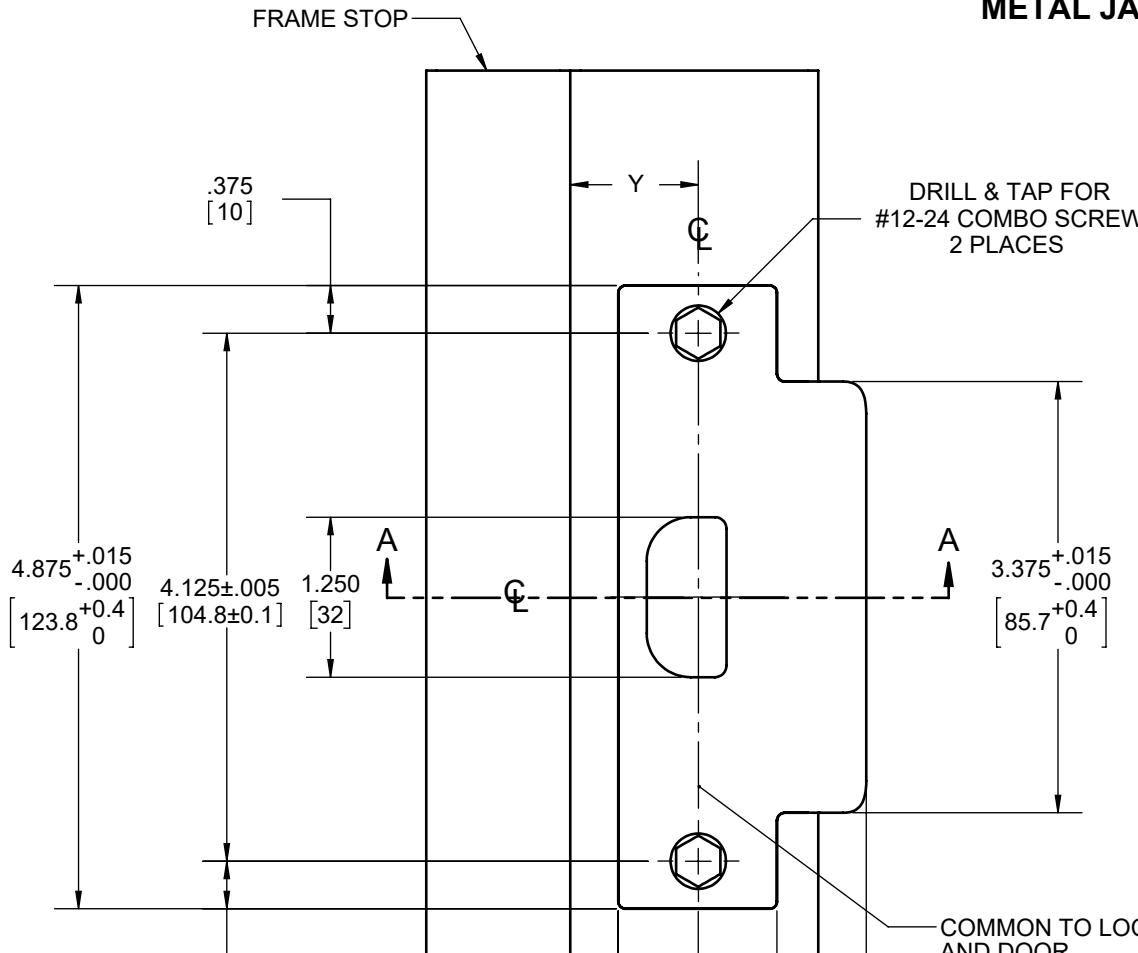

.625 [16]  
1.250<sup>.015</sup><sub>-.000</sub> [31.8<sup>.4</sup><sub>0</sub>]  
1.937 [49]

MIN. DEPTH REQ.

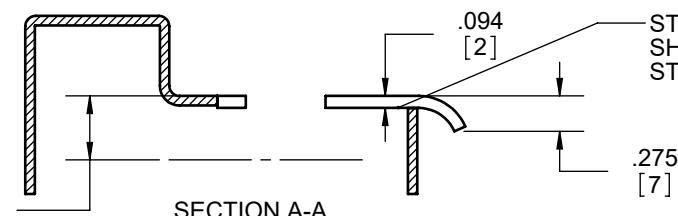

STRIKE MOUNTING BRACKET NOT SHOWN. MANUFACTURE TO SUIT STRIKE AND MINIMUM DEPTH




NOTES:

1. DIMENSION "Y" IS A FUNCTION OF DOOR THICKNESS
2. STRIKE LOCATION MUST BE CHANGED RELATIVE TO THICKNESS OF DOOR SILENCER OR WEATHERSTRIPPING WHEN USED.

DIMENSIONS IN [ ] ARE IN MILLIMETERS



**3935 ASA STRIKE  
WOOD JAMB PREP TEMPLATE**

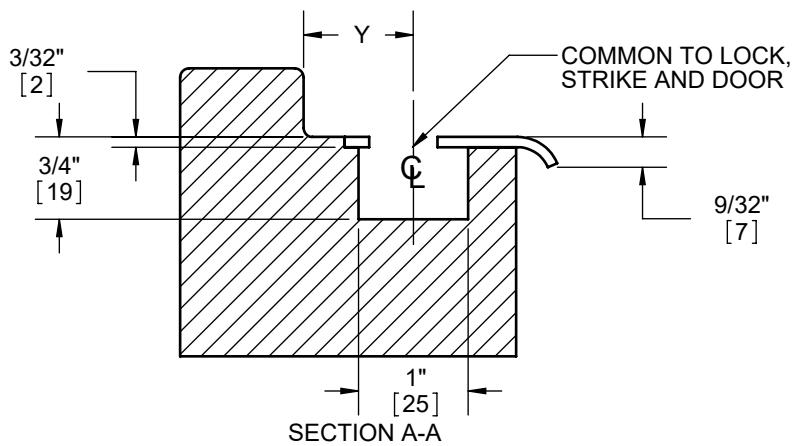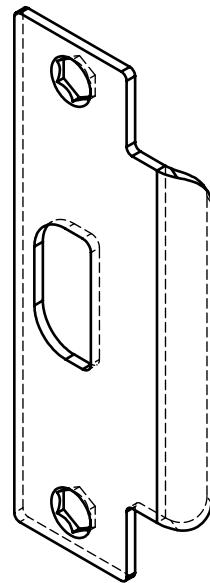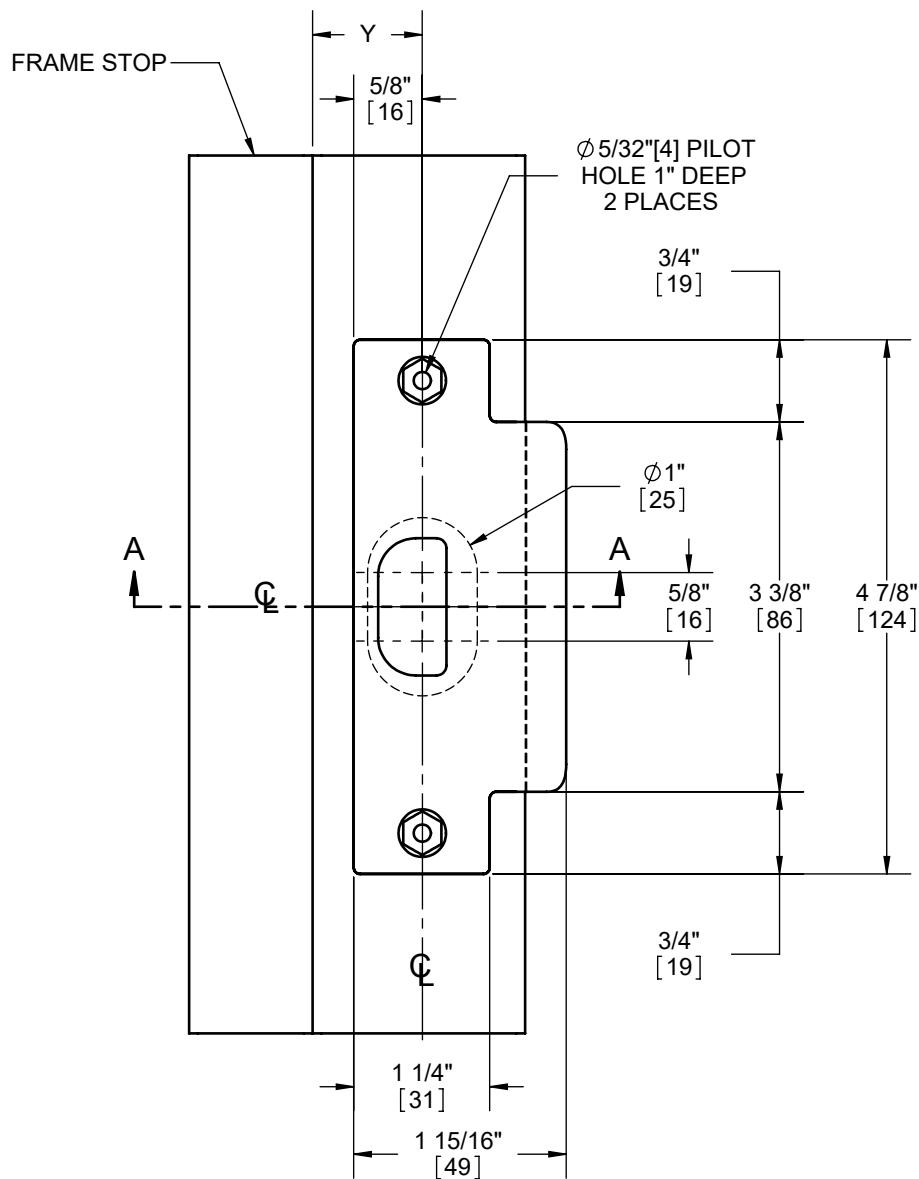

**NOTES:**

1. DIMENSION "Y" IS A FUNCTION OF DOOR THICKNESS.
2. STRIKE LOCATION MUST BE CHANGED RELATIVE TO THICKNESS OF DOOR SILENCER OR WEATHERSTRIPPING WHEN USED.

DIMENSIONS IN [ ] ARE IN MILLIMETERS

