




NOSINGS

A heavy duty safety nosing with silicon carbide granules integrally cast into the surface. Designed for new construction of poured concrete, Terrazzo or Steel Pan cement filled stairs. Prevents breaking and chipping of stair edge.


- Fasteners:** #14 x 1-1/2" flat head zinc plated sheet metal screws with lead anchor
- Options:** Cast-on anchors available upon request
- Notes:**
- Furnished with countersunk holes
 - Cross hatch surface
 - Cut with a reinforced abrasive disk, 1/8" thick, either aluminum oxide or silicon carbide
 - Maximum length available is 8', except 6" widths which are 7' maximum
 - Available in 3", 4", and 6" widths

640S

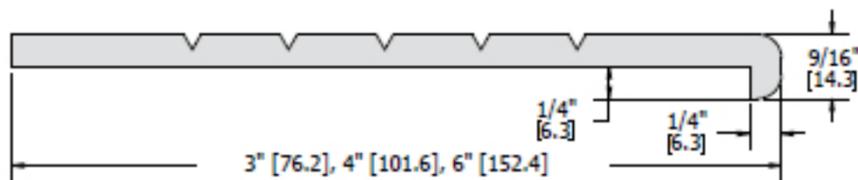


- Finishes:** CAL
- Certifications:**

641S

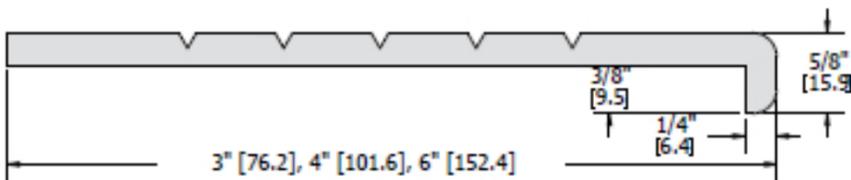

- Finishes:** CAL
- Certifications:**

642S

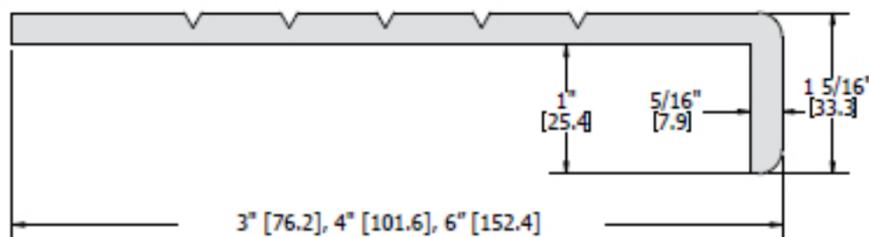


- Finishes:** CAL
- Certifications:**

COVER PLATE ASSEMBLY THRESHOLDS

Used with floor closers either center or offset hung, single/double door application


- Fasteners:** #10 x 1-1/2" flat head sheet metal screws, other screw types and anchors available upon request
- Options:** Available with Sure Step non-slip abrasive coating
- Order:** Specify closer manufacturer, offset, closer model number, thickness of door, width of door opening and handing
- Notes:**
- MIL finish thresholds are supplied with zinc plated screws
 - Brass thresholds are supplied with brass screws
 - Color anodized thresholds are supplied with screws plated to match

651S

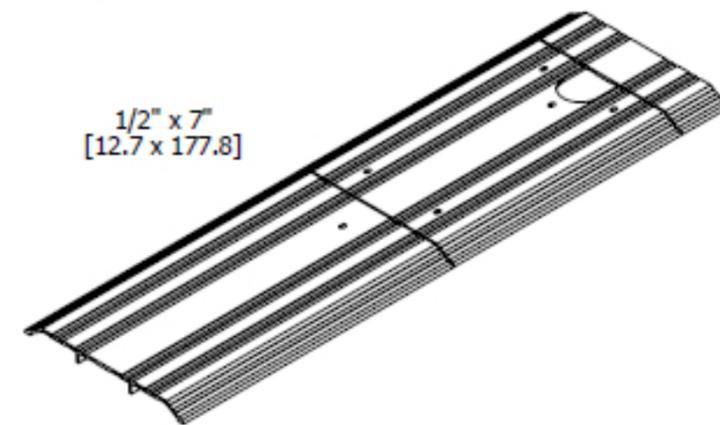

- Finishes:** MIL, DBA, MIB
- Certifications:**
- Notes:**
- Center hung
 - Without mitered ends

652S

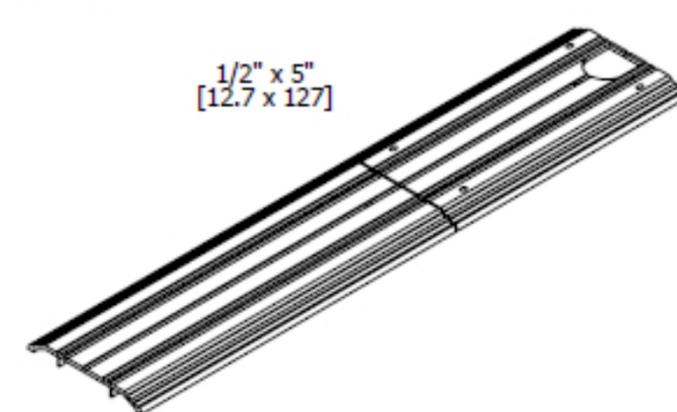

- Finishes:** MIL, DBA, MIB
- Certifications:**
- Notes:**
- Center hung
 - Without mitered ends




THRESHOLDS & WEATHERSTRIPPING

COVER PLATE ASSEMBLY THRESHOLDS (CONTINUED)

653S

1/2" x 7"
[12.7 x 177.8]

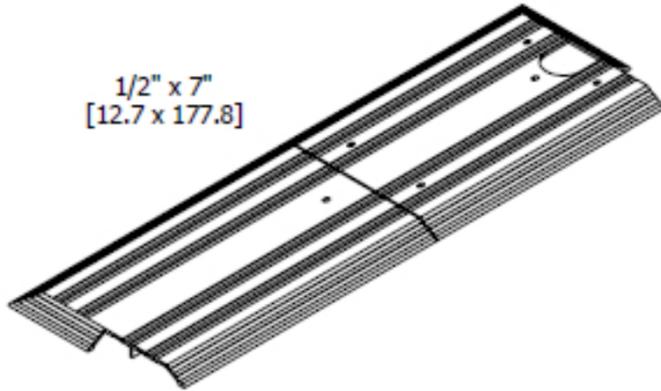

Finishes:
Certifications:

MIL, DBA, MIB




Notes:

- Offset hung
- With mitered ends

654S

1/2" x 7"
[12.7 x 177.8]

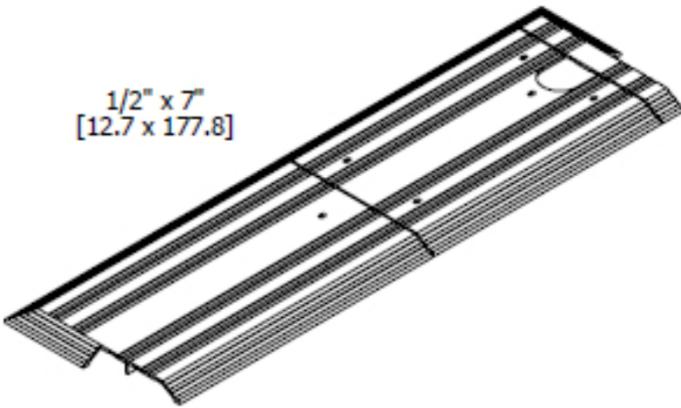

Finishes:
Certifications:

MIL, DBA, MIB




Notes:

- Center hung
- With mitered ends

655S

1/2" x 7" x 4"
[12.7 x 177.8 x 101.6]

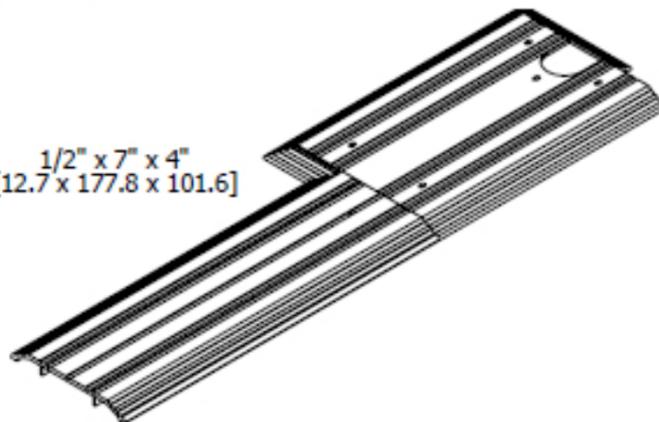

Finishes:
Certifications:

MIL, DBA, MIB



Notes:

- Offset hung
- With mitered ends

COVER PLATES

Cover Plates are used primarily to cover expansion joints and for situations requiring extra width or strength. Manufactured from solid cold rolled aluminum for extra durability.

Fasteners: Furnished without holes and fasteners unless specified

- Notes:
- Available to 96" in length
 - Furnished with both edges beveled

676S




Finishes:
Certifications:

MIL



677S

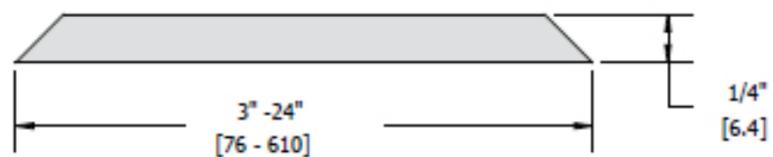

Finishes:
Certifications:

MIL



THRESHOLD ANCHORS

Threshold Anchors provide a fully adjustable anchor for concrete installation. Special locking nut assemblies can be positioned to accommodate various mounting hole spacings.

Order: Specify 1/4"-20 mounting holes for any threshold intended for use with the 619S

Fasteners: 1/4"-20 Flat head screws and locking nut assembly per foot of anchor

619S



Finishes: MIL

