

WEATHERSTRIPPING - AUTOMATIC DOOR BOTTOMS

Provides an outstanding seal against drafts, light, smoke and sound. For best results, use in conjunction with a threshold. When door fully closes, the gasket extends downward to provide a seal. Gasket retracts when door is opened.


Fasteners:

- #8 x 1-1/4" pan head sheet metal screws furnished with surface mount types
- #6 x 5/8" Pan head sheet metal screws furnished with mortise types

Notes:

- Furnished exact length as stated. May be trimmed for fitting (2" maximum).
- Furnished with end cover and strike plates
- DBA/GLD end caps available on MIL or CLR devices (Not available on 742S)

742S - Mortise



Finishes:

Inserts:

Category:

Certifications:

MIL

N, V


J



Notes:

For use on hollow metal door

730S - Mortise



Finishes:

Inserts:

Category:

Certifications:

MIL


N, S

H, J

Certifications:



743S - Mortise



Finishes:

Inserts:

Category:

Certifications:


MIL

N

H, J



747S - Surface

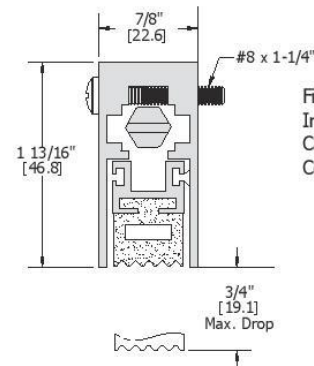

Finishes:

Inserts:

Category:

Certifications:


CLR, DBA, GLD

N

H, J



740S - Surface



Finishes:

Inserts:

Category:

Certifications:

DBA, GLD, CLR

N, S

H, J

Certifications:

