


WEATHERSTRIPPING - DOOR BOTTOMS

Provides a seal against weather. For best results, use in conjunction with a threshold.


- Fasteners: #6 x 5/8" pan head sheet metal screws
- Notes:
- Lengths up to 48" are supplied 1/2" over their stated size to allow for fitting
 - Lengths over 48" are supplied 1" over size
 - "Cut to exact length," may be specified
 - Constructed of strong extruded 6063-T5 aluminum

751S

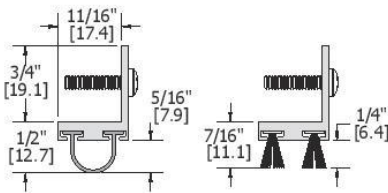


Finishes: MIL, DBA, GLD
 Inserts: V, N, S, W
 Category: H, J
 Certifications: 

772S

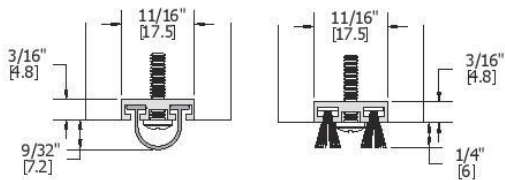


Finishes: MIL, DBA, GLD
 Inserts: V, N, S, W
 Category: H, J
 Certifications: 

774S




Finishes: MIL, DBA
 Inserts: V, N
 Category: H, J
 Certifications: 

776S




Finishes: CLR, DBA, GLD
 Inserts: N
 Category: H, J
 Certifications: 

777S



Finishes: MIL, DBA, GLD
 Inserts: V, N
 Category: H, J
 Certifications: 

778S




Finishes: MIL, DBA, GLD
 Inserts: V, N
 Category: H, J
 Certifications: 




WEATHERSTRIPPING - DOOR BOTTOMS

779S




Finishes: MIL, DBA, GLD
 Inserts: V, N
 Category: H, J
 Certifications: 

783S




Finishes: MIL, DBA, GLD
 Inserts: V
 Category: J
 Certifications: 

780S




Finishes: MIL, DBA, GLD
 Inserts: V, N
 Category: H, J
 Certifications: 

787S




Finishes: MIL
 Inserts: N
 Category: H, J
 Certifications: 

782S



Finishes: MIL, DBA, GLD
 Inserts: V, N
 Category: H, J
 Certifications: 

789S



Finishes: MIL, DBA, GLD
 Inserts: W
 Category: H, J
 Certifications: 