



THRESHOLDS - FLOOR CLOSER

Used with floor closers either center or offset hung, single/double door application

Fasteners: #10 x 1-1/2" flat head sheet metal screws, other screw types and anchors available upon request


Options: Available with Sure Step non-slip abrasive coating
Order: Specify closer manufacturer, offset, closer model number, thickness of door, width of door opening and handing

Notes:

- MIL finish thresholds are supplied with zinc plated screws
- Color anodized thresholds are supplied with screws plated to match

653S - Offset Hung

1/2" x 7"
[12.7 x 177.8]

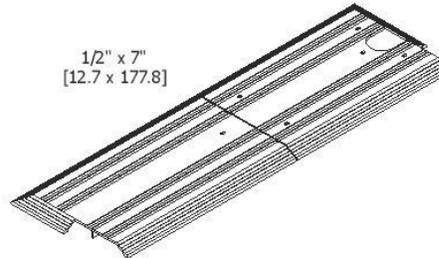

Finishes:
Certifications:


MIL, DBA
  **BHMA CERTIFIED**

Notes:

- Offset hung
- With mitered ends

651S - Center Hung

1/2" x 7"
[12.7 x 177.8]

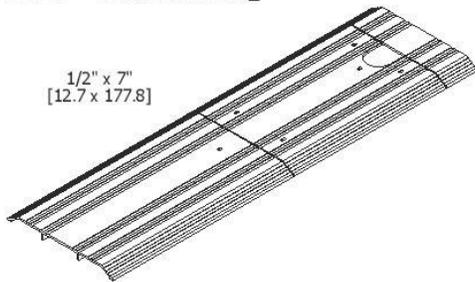

Finishes:
Certifications:


MIL, DBA
  **BHMA CERTIFIED**

Notes:

- Center hung
- Without mitered ends

654S - Center Hung

1/2" x 7"
[12.7 x 177.8]

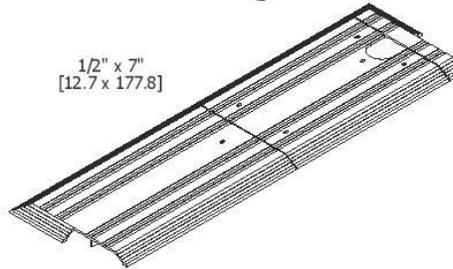

Finishes:
Certifications:


MIL, DBA
  **BHMA CERTIFIED**

Notes:

- Center hung
- With mitered ends

652S - Center Hung

1/2" x 5"
[12.7 x 127]

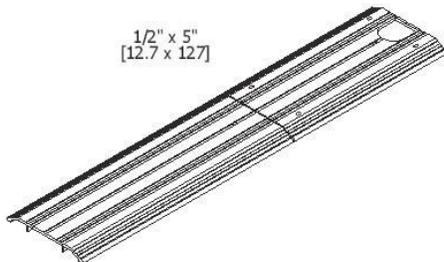

Finishes:
Certifications:


MIL, DBA
  **BHMA CERTIFIED**

Notes:

- Center hung
- Without mitered ends

655S - Offset Hung

1/2" x 7" x 4"
[12.7 x 177.8 x 101.6]

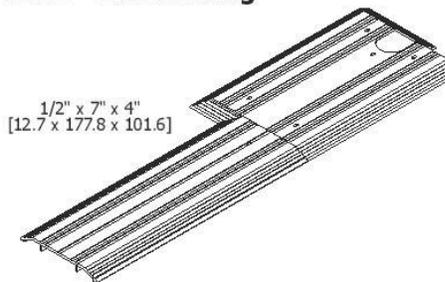

Finishes:
Certifications:

MIL, DBA
  **BHMA CERTIFIED**

Notes:

- Offset hung
- With mitered ends

