

Pocket Door Kits



Pocket door aka “doors that vanish”— Hager Companies offer innovative design options for saving space and complementing classic and contemporary decors.

Hager’s pocket-door hardware is ideal for single and bi-parting pocket-door configurations in rough openings from two to four feet.

Steel or aluminum tracks support doors up to 250 lbs. and are designed for simple installation and durable performance. Hager’s 4-wheel spring carrier design provides an ultra-smooth gliding movement.

Pocket door hardware is available in kits (by opening length) or individual components.

Pocket frame kits include all the framing and hardware components to make installing pocket doors easy. KV offers frame kit solutions for traditional 2 x 4 framing, as well as 2 x 6 framing applications.





POCKET - 9110 & 9130 PACKAGED SETS

FEATURES



- Extra heavy duty aluminum I-beam track and hardware
- Conforms to ANSI A156.14
- Type: D8681, D8711

SPECIFICATIONS


- For doors 1" - 1-3/4" (25 mm - 44 mm) thick doors
- 9110 Packaged Sets up to 175 lbs (80 kg) per door
- 9130 Packaged Sets up to 275 lbs (125 kg) per door
- Track is extruded aluminum jump-proof style with "I" beam track
- Hangers have 1" (25 mm) diameter wheels

Part Number	Description
9110 Packaged Set	
Includes one (1) 9101 track and one (1) 9109 parts bag: two (2) 9102 hangers, and one (1) 9115 floor guide	
9110-60	Pocket Door Set - 5' (1524 mm) for 2'6" (762 mm) door
9110-72	Pocket Door Set - 6' (1829 mm) for 3'0" (914 mm) door
9110-84	Pocket Door Set - 7' (2134 mm) for 3'6" (1067 mm) door
9110-96	Pocket Door Set - 8' (2438 mm) for 4'0" (1219 mm) door
9110-120	Pocket Door Set - 10' (3048 mm) for 5'0" (1524 mm) door
9110-144	Pocket Door Set - 12' (3658 mm) for 6'0" (1829 mm) door
9130 Packaged Set	
Includes one (1) 9101 track and one (1) 9129 parts bag: two (2) 9105 hangers, and one (1) 9115 floor guide	
9130-60	Pocket Door Set - 5' (1524 mm) for 2'6" (762 mm) door
9130-72	Pocket Door Set - 6' (1829 mm) for 3'0" (914 mm) door
9130-84	Pocket Door Set - 7' (2134 mm) for 3'6" (1067 mm) door
9130-96	Pocket Door Set - 8' (2438 mm) for 4'0" (1219 mm) door
9130-120	Pocket Door Set - 10' (3048 mm) for 5'0" (1524 mm) door
9130-132	Pocket Door Set - 11' (3353 mm) for 5'6" (1676 mm) door
9130-144	Pocket Door Set - 12' (3658 mm) for 6'0" (1829 mm) door

Part Number	Description
Tracks for use with 9110 Series and 9130 Series	
9101-72	72" (1829 mm) Aluminum I-Beam Track
9101-84	84" (2134 mm) Aluminum I-Beam Track
9101-96	96" (2438 mm) Aluminum I-Beam Track
9101-120	120" (3048 mm) Aluminum I-Beam Track
9101-144	144" (3658 mm) Aluminum I-Beam Track
9101-192	192" (4877 mm) Aluminum I-Beam Track

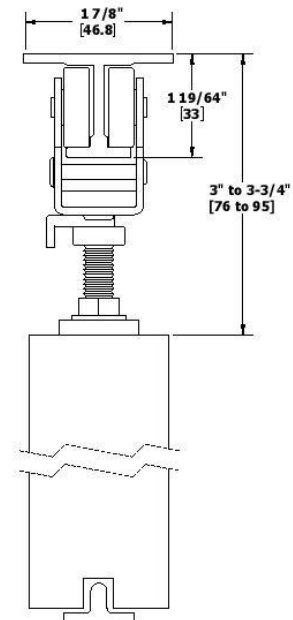

Optional Bottom Track
9121 - 9122



Installation note: Clearance between door bottom and top of 9122 track must be 7/8" (22 mm) minimum to 1-3/4" (44 mm) maximum.



POCKET - 9110 & 9130 TRACK COMPONENTS



9101

Aluminum I-Beam Track

Materials: Extruded aluminum
Gauge: 0.125" (3 mm) thick
Lengths: 72" (1829 mm) to 192" (4877 mm)

- Notes:
- Mounting holes are pre-punched for ease of installation
 - Requires two sets for by-pass opening



3835

Small Case Deadlock

See page 63 for details



9109

Parts Bag

Includes two (2) 9102 2-wheel hangers and one (1) 9115 floor guide

Note: Up to 175 lbs (79 kg) per door



Optional Part Bags

9129

Parts Bag

Includes two (2) 9105 2-wheel hangers and one (1) 9115 floor guide

Note: Up to 275 lbs (125 kg) per door



9102

2 Wheel Hanger

Materials: Zinc plated steel
Wheels:

- Nylon with Steel Ball Bearings
- Two self-aligning wheel hangers allow consistent contact with track

Hanger: 1-3/16" x 2" x 1-1/8" (46 mm x 51 mm x 29 mm)

Bolt: 3/8" x 2-5/16" (10 mm x 59 mm)
(Bolt not same as 9105)

Top Plate: 1" x 3-1/2" x 3/16" (25 mm x 89 mm x 5 mm)

- Notes:
- Use with 9101 track
 - Up to 175 lbs (79 kg) per door



9105

4 Wheel Hanger

Materials: Zinc plated steel
Wheels: Nylon with steel ball bearings

Hanger:

- 4" x 2" x 1-3/4" (102 mm x 51 mm x 45 mm)
- Up to 275 lbs (125 kg) per door

Bolt: 3/8" x 2-5/16" (10 mm x 59 mm)

Top Plate: 1" x 3-1/2" x 3/16" (25 mm x 89 mm x 5 mm)

- Notes:
- Use with 9101 track, with doors weighing up to 275 lbs (125 kg)
 - Four self-aligning wheel hangers allow consistent contact with track



9115

Bottom Door Guide

Materials: Die cast zinc aluminum alloy

Guide: 7/8" x 3/4" x 3" (22 mm x 19 mm x 76 mm)

- Notes:
- Door bottom prep requires 1/4" (6 mm) wide kerf and 9/16" (14 mm) depth

Optional Components

9111	Fixed Bottom Guide
9113	Stop
9114	Bottom Guide Rail
9884	Pocket Door Edge Pull

For optional components see pages 59-63



POCKET - 9678 POCKET DOOR SET

FEATURES

- Heavy duty aluminum box track and hardware
- Conforms to ANSI A156.14
- Type: D8681, D8711




SPECIFICATIONS

- For doors 1-1/8" - 1-3/4" (29 mm - 44 mm) thick
- Up to 125 lbs (57 kg) per door with 9605 hangers
- Up to 150 lbs (68 kg) per door with 9606 hangers
- Track is extruded aluminum jump-proof style with "V" shaped rails
- Hangers have four 7/8" (22 mm) diameter wheels for 9605 and wheels mounted on ball bearing shafts for 9606

Part Number	Description
9678 Pocket Door Set for 125 lb. doors Includes one (1) 9601 track and one (1) 9632 parts bag: two (2) 9605 hangers, two (2) 9883 guides, and one (1) 9881 bumper	
9678-72	Pocket Door Set - 6' (1829 mm) for 30" (914 mm) door
9678-96	Pocket Door Set - 8' (2438 mm) for 40" (1219 mm) door

TRACKS - 0.05" (1.3 mm) thick aluminum

Part Number	Description
Tracks for use with 9601 Series	
9601-35	35" (889 mm) Aluminum Box Track
9601-47	47" (1194 mm) Aluminum Box Track
9601-55	55" (1397 mm) Aluminum Box Track
9601-59	59" (1499 mm) Aluminum Box Track
9601-63	63" (1600 mm) Aluminum Box Track
9601-71	71" (1803 mm) Aluminum Box Track
9601-96	96" (2438 mm) Aluminum Box Track
9601-120	120" (3048 mm) Aluminum Box Track
9601-144	144" (3658 mm) Aluminum Box Track

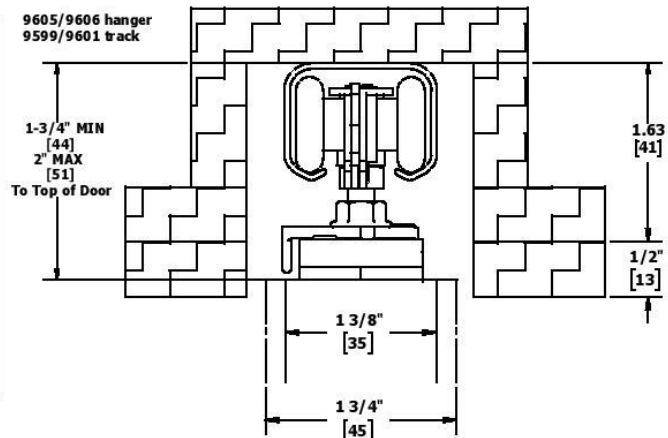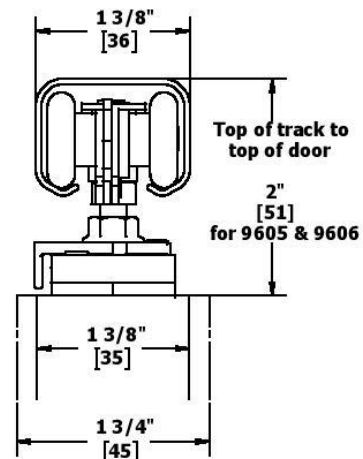

POCKET - 9678 TRACK COMPONENTS



9601

Aluminum Box Track

- Materials: Extruded aluminum
 Gauge: 0.050" (1.3 mm)
 Track: 1-1/16" x 1-3/8"
 (27 mm x 35 mm)
 Lengths: 35" (889 mm) to 144"
 (3657 mm)
 Notes:
- Refer to series pages for weight capacities
 - Jump proof twin channel design



3835

Small Case Deadlock

See page 63 for details



9632

Parts Bag

Includes two (2) 9605 hangers, two (2) 9883 guides, and one (1) 9881 bumper



9633

Parts Bag

Includes two (2) 9606 hangers, two (2) 9883 guides, and one (1) 9881 bumper
 * For doors weighing up to 150 lbs. (68 kg)



9605

4-Wheel Hanger

- Materials: Steel with brass-tone dichromate finish
 Wheel: 7/8" (22 mm) diameter
 Notes:
- Up to 125 lbs (57 kg) per door
 - Self-aligning to allow consistent contact with track
 - Pre-lubricated Celcon wheels mounted on steel ball bearing shafts
 - Can be used on pivot set
 - Use in conjunction with 9601 or 9602 track



9606

4-Wheel Ball Bearing Hanger

- Materials: Steel with brass-tone dichromate finish
 Wheel: 7/8" (22 mm) diameter
 Notes:
- Up to 150 lbs (68 kg) per door
 - Self-aligning to allow consistent contact with track
 - Pre-lubricated Celcon wheels mounted on steel ball bearing shafts
 - Used in conjunction with 9607, 9608 or 9610 top door plate and 9599, 9601 or 9602 track



9883

Two Piece Pocket Door Guide

- Materials: Polyethylene
 Guide: 1-3/16" x 3/4" x 1-1/8"
 (21 mm x 19 mm x 29 mm)
 Notes:
- Two pieces per door required
 - Screws to jamb to guide door and prevent rubbing



9881

Bumper

- Materials: Rubber
 Stop: 1/2" diameter x 3/8" deep
 (13 mm x 10 mm)
 Notes: With screws

Optional Components

330D	Pocket Door Latch
330L	Pocket Door Privacy Latch
330M	Pocket Door Privacy Latch
2630	Flush Cup Pull
9884	Pocket Door Edge Pull
9815	Bumper Stop
9889	Non-Adjustable Floor Guide

For optional components see pages 59-63





POCKET - 9878 PACKAGED SETS

FEATURES

- Extra heavy duty aluminum box track and hardware
- Conforms to ANSI A156.14
- Type: D8681, D8711

SPECIFICATIONS

- For doors 1-3/8" - 1-3/4" (35 mm - 44 mm) thick
- Up to 250 lbs (113 kg) per door
- Track is extruded aluminum jump-proof style with "V" shaped rails
- Hangers have four 1-1/4" (32 mm) diameter wheels

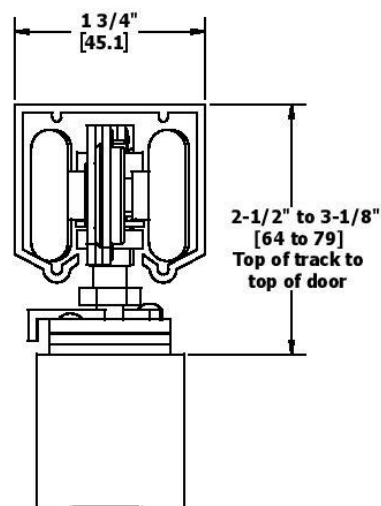

Interchanges with Stanley 57/58.

Part Number	Description
9878 Series Set	Includes one (1) 9801 track and one (1) 9742 parts bag
9878-72	Pocket Door Set - 6' (1829 mm) for 3'0" (914 mm) door
9878-96	Pocket Door Set - 8' (2438 mm) for 4'0" (1219 mm) door

TRACKS - 0.075" (1.9 mm) thick aluminum

Part Number	Description
Tracks for use with 9801 Series	
9801-72	72" (1829 mm) Aluminum Box Track
9801-96	96" (2438 mm) Aluminum Box Track
9801-120	120" (3048 mm) Aluminum Box Track
9801-144	144" (3658 mm) Aluminum Box Track
9801-192	192" (4877 mm) Aluminum Box Track



POCKET - 9878 TRACK COMPONENTS



9801

Extra Heavy Duty Box Track

Materials: Extruded aluminum
 Gauge: 0.075" (1.9 mm)
 Track: 1-5/8" x 1-3/4"
 (41 mm x 44 mm)
 Lengths: 72" (1829 mm) to 192"
 (4877 mm)
 Notes:

- For doors up to 250 lbs (113 kg)
- Jump proof twin channel design



3835

Small Case Deadlock

Thumbturn: Meet ADA Requirements, "No pinch," No grasp."
 Lock Case: Heavy wrought steel with zinc dichromate finish - 4-5/16" x 3-9/16" x 1" (110 mm x 90 mm x 25 mm)
 Armor Front: 1-1/4" x 5-5/8" x 7/32" (32 mm x 143 mm x 5 mm)
 Keys: Two operating keys supplied per lock
 Cylinder:

- Brass - keyed different - C keyway - Standard
- Other keying options, including keyed 6-pin, available from factory
- SFIC uncombined or combined, brass 6- or 7-pin sold separately
- Drilled 6-pin, keyed 5-pin - Standard
- Small Format Interchangeable Core housing available
- Schlage "L" cam - Standard

 Door Thickness:

- 1-3/8" - 2-1/2" (35mm-64mm) - steel door
- 1-3/4" - 2-1/2" (45mm-64mm) - wood door
- Must specify door thickness if greater than 1-3/4" (45mm)

 Backset: 2-3/4" (70 mm) only
 Deadbolt: 1" (25 mm) throw - stainless steel
 Strike: 1 1/8" wide x 3 1/2" (29mm x 89mm) NO LIP
 Finishes: US26D
 Functions: 35-Cylinder x Thumbturn, 36-Single Cylinder, 37-Double Cylinder, 38-Thumbturn Only, 39-Thumbturn w/ Emergency Key



9742

Parts Bag

Includes two (2) 9827 hangers, two (2) 9883 guides, and one (1) 9881 bumper



9827

Four Wheel Ball Bearing Hanger

Materials: Zinc plated steel
 Wheels: Self aligning to allow consistent contact with track
 Wheel: 1-1/4" (32 mm) diameter
 Notes:

- For doors up to 75 lbs (34 kg)
- Pre-lubricated Celcon wheels on steel shafts with steel ball bearings
- Ball bearing axles
- For use with 9801 track



9881

Bumper

Materials: Rubber
 Stop: 1/2" diameter x 3/8" deep (13 mm x 10 mm)
 Notes: With screws



9883

Two Piece Pocket Door Guide

Materials: Polyethylene
 Guide: 1-3/16" x 3/4" x 1-1/8" (21 mm x 19 mm x 29 mm)
 Notes:

- Two pieces per door required
- Screws to jamb to guide door and prevent rubbing

Optional Components

330D	Pocket Door Latch
330L	Pocket Door Privacy Latch
330M	Pocket Door Privacy Latch
2630	Flush Cup Pull
9884	Pocket Door Edge Pull
9815	Bumper Stop
9884	Pocket Door Edge Pull
9889	Non-Adjustable Floor Guide

For optional components see pages 59-63



POCKET - 9901 SERIES

FEATURES

- Extra heavy duty aluminum box track and hardware
- Conforms to ANSI A156.14
- Type: D8681



SPECIFICATIONS

- For doors 1-3/8" - 1-3/4" (35 mm - 44 mm) thick
- Up to 250 lbs (113 kg) per door
- Quick release hangers allow easy door hanging and removal
- Hangers interchange with Stanley & Johnson track and hangers
- Universal extruded aluminum track interchanges with Stanley & Johnson track and hangers
- Hangers have 1" (25 mm) diameter ball bearing wheels

Part Number	Description
9901 Series Set	Includes one (1) 9821 track and one (1) 9895 parts bag: two (2) 9825 hangers, two (2) 9883 guides, and one (1) 9881 bumper
9901-72	Pocket Door Set - 6' (1829 mm) for 3'0" (914 mm) door
9901-96	Pocket Door Set - 8' (2438 mm) for 4'0" (1219 mm) door

TRACKS - 0.06" (1.5 mm) thick aluminum

Part Number	Description
Tracks for use with 9901 Series	
9821-59	59" (1499 mm) Aluminum Box Track
9821-71	71" (1803 mm) Aluminum Box Track
9821-96	96" (2438 mm) Aluminum Box Track
9821-144	144" (3658 mm) Aluminum Box Track

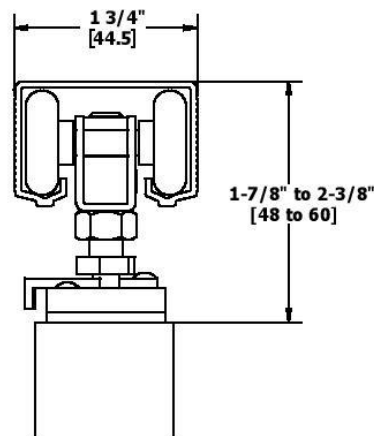

Interchanges with Stanley 125/250 Series and Johnson 100 Series.



POCKET - 9901 SERIES TRACK COMPONENTS



9821

Aluminum Box Track

Materials: Extruded aluminum
 Gauge: 0.06" (1.55 mm)
 Track: 1-5/8" x 1-1/16"
 (41 mm x 27 mm)
 Lengths: 59" (1499 mm) to 144"
 (3658 mm)
 Notes:

- For doors up to 250 lbs (113 kg)
- Jump proof twin channel design



3835

Small Case Deadlock

Thumbturn: Meet ADA Requirements, "No pinch," No grasp."
 Lock Case: Heavy wrought steel with zinc dichromate finish - 4-5/16" x 3-9/16" x 1" (110 mm x 90 mm x 25 mm)
 Armor Front: 1-1/4" x 5-5/8" x 7/32" (32 mm x 143 mm x 5 mm)
 Keys: Two operating keys supplied per lock
 Cylinder:

- Brass - keyed different - C keyway - Standard
- Other keying options, including keyed 6-pin, available from factory
- SFIC uncombined or combined, brass 6- or 7-pin sold separately
- Drilled 6-pin, keyed 5-pin - Standard
- Small Format Interchangeable Core housing available
- Schlage "L" cam - Standard

 Door Thickness:

- 1-3/8" - 2-1/2" (35mm-64mm) - steel door
- 1-3/4" - 2-1/2" (45mm-64mm) - wood door
- Must specify door thickness if greater than 1-3/4" (45mm)

 Backset: 2-3/4" (70 mm) only
 Deadbolt: 1" (25 mm) throw - stainless steel
 Strike: 1 1/8" wide x 3 1/2" (29mm x 89mm) NO LIP
 Finishes: US26D
 Functions: 35-Cylinder x Thumbturn, 36-Single Cylinder, 37-Double Cylinder, 38-Thumbturn Only, 39-Thumbturn w/ Emergency Key



9895

Parts Bag

Includes two (2) 9825 4-wheel ball bearing hangers with quick release top plate, two (2) 9883 guides, and one (1) 9881 bumper



9825

4 Wheel Ball Bearing Hanger with Quick Release Top Mount Plate

Materials: Zinc plated steel
 Wheels: Self aligning to allow consistent contact with track
 Wheel: 1" (25 mm) diameter
 Notes:

- Pre-lubricated Celcon wheels
- Up to 250 lbs (113 kg) doors
- For use with 9821 track
- Quick release feature allows easy door hanging and removal



9883

Two Piece Pocket Door Guide

Materials: Polyethylene
 Guide: 1-3/16" x 3/4" x 1-1/8" (21 mm x 19 mm x 29 mm)
 Notes:

- Two pieces per door required
- Screws to jamb to guide door and prevent rubbing



9881

Bumper

Materials: Rubber
 Stop: 1/2" diameter x 3/8" deep (13 mm x 10 mm)
 Notes: With screws

Optional Components

330D	Pocket Door Latch
330L	Pocket Door Privacy Latch
330M	Pocket Door Privacy Latch
2630	Flush Cup Pull
9559	Aligner
9815	Bumper Stop
9884	Pocket Door Edge Pull
9889	Non-Adjustable Floor Guide

For optional components see pages 59-63



POCKET - 9628 | 9629 | 9630 | 9631

FEATURES

- Heavy duty pocket door kit
- Conform to ANSI A156.14
- Type: D8671, D8701

SPECIFICATIONS

- Jump proof track and rollers
- Pre-assembled header assembly goes up quickly
- Easy door installation and removal for painting and repair
- Real wood split studs, size 3/4" x 1-5/8" (19 mm x 26 mm) length relative to height, steel encased for rigidity and to prevent fastener penetration into the pocket
- Track header unit attaches to rough framing at both ends - split studs nail or screw to track header - no connections to rough header
- 2 pair of split studs with wood inserts
- See chart below for appropriate kit

Pocket Door Kit



Part #	Max Door Weight	Door Thickness*	Door Width	Door Height	Hanger Bearings
9628	150 lbs (68 kg)	1-3/8" - 1-3/4" (35 mm - 44 mm)	30" (914 mm)	9'0" (2743 mm)	9606 Steel Ball
9629	150 lbs (68 kg)	1-3/8" - 1-3/4" (35 mm - 44 mm)	30" (914 mm)	8'0" (2438 mm)	9606 Steel Ball
9630	150 lbs (68 kg)	1-3/8" - 1-3/4" (35 mm - 44 mm)	30" (914 mm)	7'0" (2134 mm)	9606 Steel Ball
9631	125 lbs (57 kg)	1-3/8" - 1-3/4" (35 mm - 44 mm)	30" (914 mm)	6'8" (2032 mm)	9605 Molded Celcon

* 9634 adapter kit is recommended for 1-3/4" (45 mm) doors (sold separately).

Installation Note: For bi-parting doors, use Hager double pocket door kit 9639 (sold separately).



Joins two pocket door frames to make one large doorway. Rough opening width changes to door width multiplied by four.

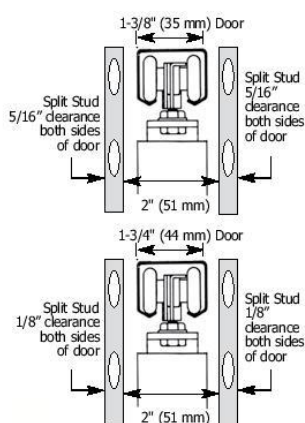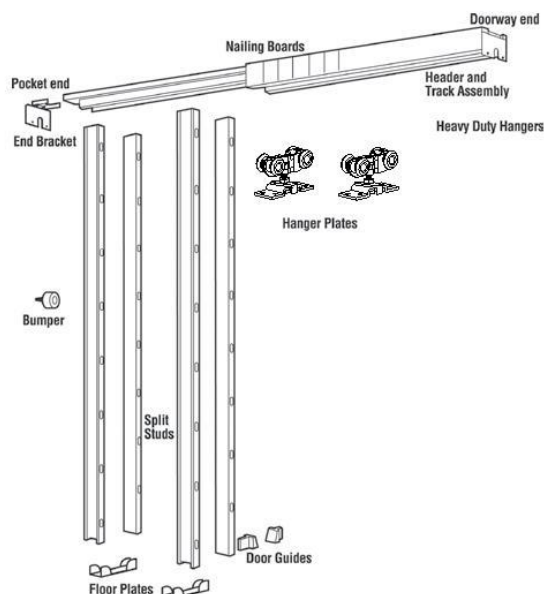

Note: 9634 adapter kit (sold separately) recommended for doors 1-3/4" (45 mm) thick.

Contents

Quantity	Description
1	Header assembly
2	Pair of split studs
2	Heavy duty hangers
2	Door hanger plates
1	Bumper
1	Pair of door guides
1	Adjusting wrench
2	Floor plates
1	Doorway end bracket
1	Pocket end bracket



POCKET - 9850

FEATURES

- Heavy duty pocket door kit
- Conform to ANSI A156.14
- Type: D8671, D8701

Pocket Door Kit

SPECIFICATIONS



- For doors 1-3/8" - 1-3/4" (35 mm - 44 mm) thick, up to 4'0" (1219 mm) wide and 8'0" (2438 mm) or 8'6" (2591 mm) high, weighing up to 250 lbs (112 kg)
- Jump proof track and rollers
- 9801 heavy duty aluminum box track
- Pre-assembled header assembly goes up quickly
- Easy door installation and removal for painting and repair
- Real wood split studs, size 3/4" x 1-5/8" (19 mm x 26 mm) length relative to height, steel encased for rigidity and to prevent fastener penetration into the pocket
- Track header unit attaches to rough framing at both ends - split studs nail or screw to track header - no connections to rough header
- 3 pair of split studs with wood inserts

Part #	Max Door Weight	Door Thickness*	Door Width	Door Height	Hanger Bearings
9850	250 lbs (57 kg)	1-3/8" - 1-3/4" (35 mm - 44 mm)	4'0" (1219 mm)	8'0" (2438 mm)	9829 Steel Ball

Installation Note: For bi-parting doors, use Hager double pocket door kit 9639 (sold separately).



Joins two pocket door frames to make one large doorway. Rough opening width changes to door width multiplied by four.

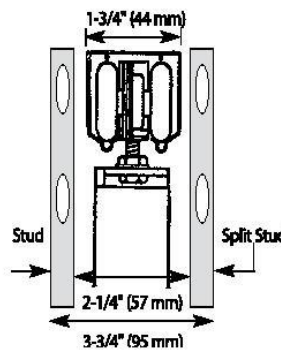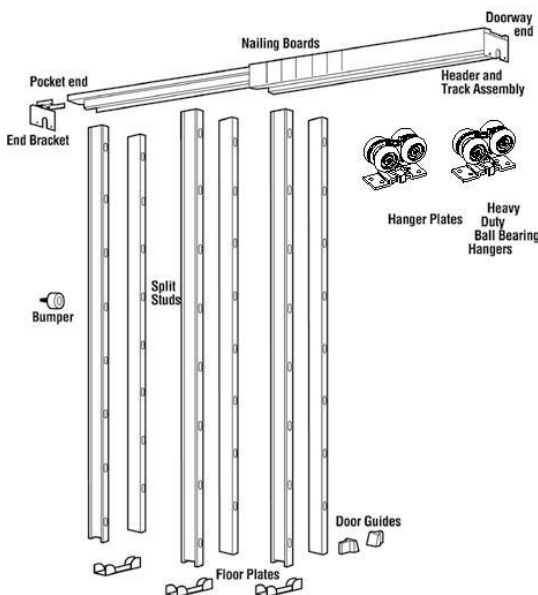

Contents

Quantity	Description
1	Header assembly
3	Pair of split studs
2	Heavy duty hangers
2	Door hanger plates
1	Bumper
1	Pair of door guides
1	Adjusting wrench
3	Floor plates
1	Doorway end bracket
1	Pocket end bracket



POCKET - POCKET DOOR KIT COMPONENTS



330D

Pocket Door Latch

Certification: Meets ANSI A156.14 for D0821.1

Size: 2-3/4" x 2-1/2"
(70 mm x 64 mm)

Finger Piece: 1-3/8" (35 mm)
extension

Materials: Brass

Finishes: US3, US5, US10B,
US15, US15A, US19,
US26, US26D

Fasteners: Two (2) #6 x 5/8"
OPHWS; (2) #6 x 3/4"
FPHWS

Notes: For use with 1-3/8" to
1-3/4" (35 mm to
45 mm) door



2610

Flush Cup Finger Pull

Overall Diameter: 31/32" (25 mm)

Finger Pull: 3/4" (19 mm) diameter

Depth: 5/16" (8 mm)

Projection: 1/32" (.8 mm)

Materials: Solid brass

Finishes: US3, US4, US5, US10A,
US15, US15A, US26,
US26D, ABA

Notes: Built-in prong design
eliminates the need
for screws or brads.



330L

Pocket Door Privacy Latch

Size: 2-3/4" x 2-1/2"
(70 mm x 64 mm)

Finger Piece: 1-3/8" (35 mm)
extension

Strike Size: 1" x 2-1/4" (25 mm x 57 mm)

Materials: Brass

Finishes: US3, US5, US10B, US15,
US15A, US19, US26, US26D

Fasteners: Two (2) #6 x 5/8"
OPHWS; (2) #6 x 3/4" FPHWS

Notes: For use with 1-3/8" door



2630

Flush Cup Pull

Overall Diameter: 2-7/16" (62 mm)

Finger Pull: 2-1/16" (52 mm)
diameter

Depth: 11/32" (9 mm)

Projection: 3/32" (2 mm)

Materials: Solid brass

Finishes: US3, US4, US5, US10A,
US15, US15A, US26,
US26D, ABA

Notes: Built-in prong design
eliminates the need for
screws or brads.



330M

Pocket Door Privacy Latch

Certifications: Meets ANSI A156.14 for D0831

Size: 2-3/4" x 2-1/2"
(70 mm x 64 mm)

Finger Piece: 1-3/8" (35 mm)
extension

Strike Size: 1" x 2-1/4" (25 mm x
57 mm)

Materials: Brass

Finishes: US3, US5, US10B,
US15, US15A, US19,
US26, US26D

Fasteners: Two (2) #6 x 5/8"
OPHWS; (2) #6 x 3/4"
FPHWS

Notes: For use with 1-3/4" door



9605

4-Wheel Hanger

Materials: Steel with brass-tone
dichromate finish

Wheel: 7/8" (22 mm) diameter

Notes:

- For doors up to 125 lbs (57 kg)
- Wheels are self aligning to allow consistent contact with track
- Pre-lubricated Celcon wheels mounted on steel ball bearing shafts
- Can be used on pivot set
- Use in conjunction with 9601 or 9602 track



POCKET- POCKET DOOR KIT COMPONENTS



9606 4-Wheel Ball Bearing Hanger with Top Mount Plate

- Materials:** Steel with brass-tone dichromate finish
- Wheels:** 7/8" (22 mm) diameter
- Notes:**
- Self aligning to allow consistent contact with track
 - Pre-lubricated Celcon wheels mounted on steel ball bearing shafts
 - Up to 150 lbs (68 kg) per door
 - Use with 9601, 9602, or 9603 track



3835 Small Case Deadlock

- Thumbturn:** Meet ADA Requirements, "No pinch," No grasp."
- Lock Case:** Heavy wrought steel with zinc dichromate finish - 4-5/16" x 3-9/16" x 1" (110 mm x 90 mm x 25 mm)
- Armor Front:** 1-1/4" x 5-5/8" x 7/32" (32 mm x 143 mm x 5 mm)
- Keys:** Two operating keys supplied per lock
- Cylinder:**
- Brass - keyed different - C keyway - Standard
 - Other keying options, including keyed 6-pin, available from factory
 - SFIC uncombined or combined, brass 6- or 7-pin sold separately
 - Drilled 6-pin, keyed 5-pin - Standard
 - Small Format Interchangeable Core housing available
 - Schlage "L" cam - Standard
- Door Thickness:**
- 1-3/8" - 2-1/2" (35mm-64mm) - steel door
 - 1-3/4" - 2-1/2" (45mm-64mm)- wood door
 - Must specify door thickness if greater than 1-3/4" (45mm)
- Backset:** 2-3/4" (70 mm) only
- Deadbolt:** 1" (25 mm) throw - stainless steel
- Strike:** 1 1/8" wide x 3 1/2" (29mm x 89mm) NO LIP
- Finishes:** US26D
- Functions:** 35-Cylinder x Thumbturn, 36-Single Cylinder, 37-Double Cylinder, 38-Thumbturn Only, 39-Thumbturn w/ Emergency Key



9632 Parts Bag

- Includes:**
- Two (2) 9605 hangers
 - Two (2) 9883 guides
 - One (1) 9881 bumper



9633 Parts Bag

- Includes:**
- Two (2) 9606 hangers
 - Two (2) 9883 guides
 - One (1) 9881 bumper



9827 Four Wheel Ball Bearing Hanger

- Materials:** Zinc plated steel
- Wheels:** Self aligning to allow consistent contact with track
- Wheel:** 1-1/4" (32 mm) diameter
- Notes:**
- For doors up to 75 lbs (34 kg)
 - Pre-lubricated Celcon wheels on steel shafts with steel ball bearings
 - Ball bearing axles
 - For use with 9801 track

Optional Components

- | | |
|------|------------------------------|
| 9610 | Replacement Top Mount Plate |
| 9634 | Pocket Door Adaptor Kit |
| 9639 | Dbl. Pocket Door Adapter Kit |
| 9865 | Flush Cup Pull |
| 9881 | Bumper |
| 9883 | Two Piece Pocket Door Guide |
| 9884 | Pocket Door Edge Pull |
| 9889 | Non-Adjustable Floor Guide |
| 9262 | Pocket Door Keyed Lock |
| 9877 | Door Guide |

For optional components see pages 59-63