



PULLS



1

Modified Half Round Wrought Door Pull

Certification: Meets ANSI A156.6 for J401 Pulls

Base: 1/2" x 1" (13 mm x 25 mm)

Projection: 2" (51 mm)

Clearance: 1-1/2" (38 mm)

Door Thickness: 1-3/4" (45 mm) - Standard

Materials: Aluminum, brass, bronze, stainless steel

Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32, US32D

Fasteners: Two (2) 1/4-20 x 2-1/4" FPHMS with finish washers

Handicap: • 2-1/2" (64 mm) clearance available on special orders

• Add prefix "H" to number (i.e., H1E)

Options: • May be combined with a plate to make a pull plate

• Other centers on special order

Notes: • For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability

• Not suitable for back to back mounting

CTC Length	1E	1G	1J	1L
Inches	6	8	10	12
Millimeters	152	203	254	305



2

Rectangular Wrought Door Pull

Certification: Meets ANSI A156.6 for J401 Pulls

Base: 3/8" x 1-1/4" (10 mm x 32 mm)

Projection: 2" (51 mm)

Clearance: 1-5/8" (41 mm)

Door Thickness: 1-3/4" (45 mm) - Standard

Materials: Aluminum, brass, bronze, stainless steel

Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32, US32D

Fasteners: Two (2) 1/4-20 x 2-1/4" FPHMS with finish washers

Handicap: • 2-1/2" (64 mm) clearance available on special orders

• Add prefix "H" to number (i.e., H2E)

Options: • May be combined with a plate to make a pull plate

• Other centers on special order

Notes: • For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability

• Not suitable for back to back mounting

CTC Length	2E	2G	2J	2L
Inches	6	8	10	12
Millimeters	152	203	254	305



3

Round Wrought Door Pull

Certification: Meets ANSI A156.6 for J401 Pulls

Base Diameter: 3/4" (19 mm)

Projection: 2-1/4" (57 mm)

Clearance: 1-1/2" (38 mm)

Door Thickness: 1-3/4" (45 mm) - Standard

Materials: Aluminum, brass, bronze, stainless steel

Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32, US32D

Fasteners: Two (2) 1/4-20 x 2-1/4" FPHMS with finish washers

Handicap: • 2-1/2" (64 mm) clearance available on special orders

• Add prefix "H" to number (i.e., H3E)

Notes: • For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability

• May be combined with a plate to make a pull plate

• Other centers on special order

• If ordered with tempered glass, specify glass thickness and hole size

• Back to back - see model 13

CTC Length	3E	3G	3J	3L
Inches	6	8	10	12
Millimeters	152	203	254	305





PULLS



4 Round Wrought Door Pull

Certification: Meets ANSI A156.6 for J401 Pulls
 Base Diameter: 1" (25 mm)
 Projection: 2-3/4" (70 mm)
 Clearance: 1-3/4" (45 mm)
 Door Thickness: 1-3/4" (45 mm) - Standard
 Materials: Aluminum, brass, bronze, stainless steel
 Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32, US32D
 Fasteners: Two (2) 1/4-20 x 2-1/4" FPHMS with finish washers
 Handicap:

CTC Length	4G	4H	4J	4L
Inches	8	9	10	12
Millimeters	203	229	254	305


- Notes:
- 2-1/2" (64 mm) clearance available on special orders
 - Add prefix "H" to number (i.e., H4E)
 - For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability
 - May be combined with a plate to make a pull plate
 - Other centers on special order
 - If ordered with tempered glass, specify glass thickness and hole size
 - Back to back - see model 13



P4E Security Pull

Certification: Meets ANSI A156.6 for J401 Pulls
 Base: 1" (25 mm) diameter
 Projection: 2-1/4" (57 mm)
 Clearance: 1-1/4" (32 mm)
 CTC Length: 6" (152 mm)
 Material: Stainless steel
 Finish: US32D
 Fasteners: Two (2) 3/8-16 x 1-1/4" "NYLOC" hex head cap screws
 Notes:

- For metal doors
- Requires reinforcing plate with an access plate and Torx screws for door edge

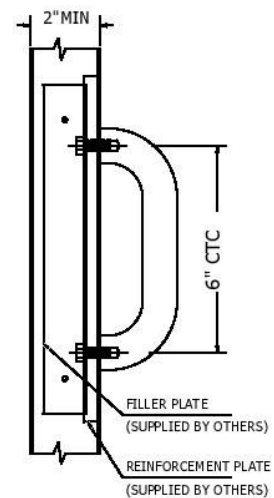

T4E Security Pull

Certification: Meets ANSI A156.6 for J401 Pulls
 Base: 1" (25 mm) diameter
 Projection: 2-1/4" (57 mm)
 Clearance: 1-1/4" (32 mm)
 Door Thickness: 1-3/4" (45 mm) - Standard
 CTC Length: 6" (152 mm)
 Material: Stainless steel
 Finish: US32D
 Fasteners: Two (2) 1/4-20 x 2-1/4" FTXMS with finish washers





PULLS



5D

Round Wrought Door Pull

- Certification: Meets ANSI A156.6 for J401 Pulls
 Base Diameter: 5/8" (16 mm)
 Projection: 2-1/8" (54 mm)
 Clearance: 1-1/2" (38 mm)
 CTC Length: 5-1/2" (140 mm)
 Door Thickness: 1-3/4" (45 mm) - Standard
 Materials: Aluminum, brass, bronze, stainless steel
 Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32, US32D
 Fasteners: Two (2) 1/4-20 x 2-1/4" FPHMS with finish washers
 Handicap:
 - 2-1/2" (64 mm) clearance available on special orders
 - Add prefix "H" to number (i.e., H5D)
- Notes:
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability
 - May be combined with a plate to make a pull plate
 - If ordered with tempered glass, specify glass thickness and hole size
 - Not suitable for back to back mounting



5N

Cast Pull

- Certification: Meets ANSI A156.6 for J401 Pulls
 O/A Height: 6-1/8" (156 mm)
 Base: 5/8" x 1-3/16" (16 mm x 30 mm)
 Projection: 2" (51 mm)
 Clearance: 1-1/2" (38 mm)
 CTC Length: 5-1/2" (140 mm)
 Door Thickness: 1-3/4" (45 mm) - Standard
 Materials: Aluminum, brass, bronze, stainless steel
 Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32D
 Fasteners: Two (2) 1/4-20 x 2-1/4" FPHMS with finish washers
 Options: May be combined with a plate to make a pull plate
 Notes: Not suitable for back to back mounting



6N

Cast Pull

- Certification: Meets ANSI A156.6 for J401 Pulls
 O/A Height: 6-1/2" (165 mm)
 Base Diameter: 1" (25 mm)
 Projection: 1-7/8" (48 mm)
 Clearance: 1-3/8" (35 mm)
 CTC Length: 5-1/2" (140 mm)
 Door Thickness: 1-3/4" (45 mm) - Standard
 Materials: Aluminum, brass, bronze, stainless steel
 Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32D
 Fasteners: Two (2) 1/4-20 x 2-1/4" FPHMS with finish washers
 Options: May be combined with a plate to make a pull plate
 Notes: Not suitable for back to back mounting



PULLS



7N

Cast Pull

Certification:	Meets ANSI A156.6 for J401 Pulls
O/A Height:	7-1/2" (190 mm)
Base Diameter:	2" (51 mm)
Projection:	1-7/8" (48 mm)
Clearance:	1-3/8" (35 mm)
CTC Length:	5-1/2" (140 mm)
Door Thickness:	1-3/4" (45 mm) - Standard
Materials:	Aluminum, brass, bronze
Finishes:	US3, US4, US10, US10B, US26, US26D, US28
Fasteners:	Two (2) 1/4-20 x 2-1/4" FPHMS with finish washers
Options:	May be combined with a plate to make a pull plate
Notes:	Not suitable for back to back mounting



8N

Cast Pull

Certification:	Meets ANSI A156.6 for J401 Pulls
O/A Height:	7-1/2" (190 mm)
Base Diameter:	2" (51 mm)
Projection:	1-7/8" (48 mm)
Clearance:	1-3/8" (35 mm)
CTC Length:	5-1/2" (140 mm)
Materials:	Aluminum, brass, bronze
Finishes:	US3, US4, US10, US10B, US26, US26D, US28
Fasteners:	Six (6) #8 x 1" OPHWS
Notes:	Not suitable for back to back mounting



P8N

Cast Pull

Certification:	Meets ANSI A156.6 for J401 Pulls
O/A Height:	8 - 3/4" (222 mm)
Base:	1-1/2" x 1-5/8" (38 mm x 41 mm)
Projection:	2-1/4" (57 mm)
Clearance:	1-9/16" (40 mm)
CTC Length:	7-3/4" (197 mm)
Materials:	Brass
Finishes:	US4, US26D
Fasteners:	Two (2) 3/8-16 x 3/4" FPHMS
Options:	Security Torx screws available
Notes:	Not suitable for back to back mounting





PULLS



9

Oval Wrought Door Pull

Certification: Meets ANSI A156.6 for J401 Pulls

Base: 1/2" x 3/4" (13 mm x 19 mm)

Projection: 2" (51 mm)

Clearance: 1-1/2" (38 mm)

Door Thickness: 1-3/4" (45 mm) - Standard

Materials: Brass, bronze, stainless steel

Finishes: US3, US4, US10, US10B, US26, US26D, US32, US32D

Fasteners: Two (2) 1/4-20 x 2-1/4" FPHMS with finish washers

Handicap: • 2-1/2" (64 mm) clearance available on special orders

• Add prefix "H" to number (i.e., H9E)

Options: • May be combined with a plate to make a pull plate

• Other centers on special order

Notes: • For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability

• Not suitable for back to back mounting

CTC Length	9E	9G	9J	9L
Inches	6	8	10	12
Millimeters	152	203	254	305



10

Round Pull

Certification: Meets ANSI A156.6 for J401 Pulls

Base Diameter: 1-1/4" (32 mm)

Projection: 3" (76 mm)

Clearance: 1-3/4" (45 mm)

Door Thickness: 1-3/4" (45 mm) - Standard

Materials: Aluminum, brass, bronze, stainless steel

Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32, US32D

Fasteners: Two (2) 5/16-18 FPHMS with finish washers

Handicap: • 2-1/2" (64 mm) clearance available on special orders

• Add prefix "H" to number (i.e., H10L)

Options: • May be combined with a plate to make a pull plate

• Other centers on special order

• If ordered with tempered glass, specify glass thickness and hole size

Notes: • For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability

• Back to back - see model 20

CTC Length	10L	10Q
Inches	12	18
Millimeters	305	457



11

Round Offset Pull

Certification: Meets ANSI A156.6 for J402 Pulls

Base Diameter: 3/4" (19 mm)

Projection: 2-1/2" (64 mm)

Offset: 2-1/2" (64 mm); 90° Standard

Clearance: 1-3/4" (45 mm)

Door Thickness: 1-3/4" (45 mm) - Standard

Materials: Aluminum, brass, bronze, stainless steel

Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32, US32D

Fasteners: Two (2) 5/16-18 x 2-1/4" FPHMS with finish washers

Handicap: • 2-1/2" (64 mm) clearance available on special orders

• Add prefix "H" to number (i.e., H11E)

Options: • For 45° offset, add prefix "X" to number (i.e., X11E)

• Other centers available on special orders

• If ordered with tempered glass, specify glass thickness and hole size

Notes: • For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability

• Back to back - see model 21

CTC Length	11E	11G	11J	11L
Inches	6	8	10	12
Millimeters	152	203	254	305





PULLS



12 Round Offset Pull

Certification: Meets ANSI A156.6 for J402 Pulls
Base Diameter: 1" (25 mm)
Projection: 2-3/4" (70 mm)
Offset: 3" (76 mm); 90° Standard
Clearance: 1-3/4" (45 mm)
Door Thickness: 1-3/4" (45 mm) - Standard
Materials: Aluminum, brass, bronze, stainless steel
Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32, US32D
Fasteners: Two (2) 5/16-18 x 2-1/4" FPHMS with finish washers
Handicap: • 2-1/2" (64 mm) clearance available on special orders
• Add prefix "H" to number (i.e., H12G)
Options: • For 45° offset, add prefix "X" to number (i.e., X12G)
• Other centers available on special orders
• If ordered with tempered glass, specify glass thickness and hole size
Notes: For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability

CTC Length	12G	12J	12L
Inches	8	10	12
Millimeters	203	254	305



13 Round Wrought Door Push/Pull Set

Certification: Meets ANSI A156.6 for J401 Pulls
Base Diameter: 3/4" (19 mm)
Projection: 2-1/4" (57 mm)
Clearance: 1-1/2" (38 mm)
Door Thickness: 1-3/4" (45 mm) - 2-1/8" (54 mm) Standard
Materials: Aluminum, brass, bronze, stainless steel
Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32, US32D
Notes: • Type 7 mounting - Standard
• Consists of two (2) pulls back to back
• For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability
• Supplied with two (2) 1/4" dia. threaded studs, spanner collar, and spanner wrench

CTC Length	13E	13G	13J	13L
Inches	6	8	10	12
Millimeters	152	203	254	305



14 Round Wrought Door Push/Pull Set

Certification: Meets ANSI A156.6 for J401 Pulls
Base Diameter: 1" (25 mm)
Projection: 2-3/4" (70 mm)
Clearance: 1-3/4" (45 mm)
Door Thickness: 1-3/4" (45 mm) - 2-1/8" (54 mm) Standard
Materials: Aluminum, brass, bronze, stainless steel
Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32, US32D
Notes: • Type 7 mounting - Standard
• Consists of two (2) pulls back to back
• For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability
• Supplied with two (2) 1/4" dia. threaded studs, spanner collar, and spanner wrench

CTC Length	14G	14H	14J	14L
Inches	8	9	10	12
Millimeters	203	229	254	305





PULLS



19N

Cast Pull

Certification: Meets ANSI A156.6 for J401 Pulls
 O/A Height: 9" (229 mm)
 Base Diameter: 1-1/2" (38 mm)
 Projection: 3-1/8" (79 mm)
 CTC Length: 6-3/16" (132 mm)
 Materials: Brass
 Finishes: US3, US10, US10B, US26, US26D
 Fasteners: Four (4) #8 x 1" OPHWS
 Notes: Suitable for back to back mounting with sex nuts by special quotation
 Clearance: 1-11/16" (43 mm)



20

Round Push/Pull Set

Certification: Meets ANSI A156.6 for J401 Pulls
 Base Diameter: 1-1/4" (32 mm)
 Projection: 3" (76 mm)
 Clearance: 1-3/4" (45 mm)
 Door Thickness: 1-3/4" (45 mm) - 2-1/8" (54 mm) Standard
 Materials: Brass, bronze, stainless steel
 Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32, US32D
 Notes:

- Type 7 mounting - Standard
- Consists of two (2) pulls back to back
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability
- Supplied with two (2) 5/16" dia. threaded studs, spanner collar, and spanner wrench

CTC Length	20L	20Q
Inches	12	18
Millimeters	305	457



20N

Cast Pull

Certification: Meets ANSI A156.6 for J401 Pulls
 O/A Height: 9" (229 mm)
 Base Diameter: 1-1/2" (38 mm)
 Projection: 3-1/8" (79 mm)
 CTC Length: 5-7/32" (132.5 mm)
 Door Thickness: 1-3/4" - Standard
 Material: Brass
 Finishes: US3, US10, US10B, US26, US26D
 Fasteners: Two (2) 1/4 - 20 x 2-3/16" undercut FPHMS with finish washers
 Clearance: 1-11/16" (43 mm)



21

Round Offset Push/Pull Set

Certification: Meets ANSI A156.6 for J402 Pulls
 Base Diameter: 3/4" (19 mm)
 Projection: 2-1/2" (64 mm)
 Clearance: 1-3/4" (45 mm)
 Offset: 2-1/2" (64); 90° - Standard
 Door Thickness: 1-3/4" (45 mm) - 2-1/8" (54 mm) Standard
 Materials: Aluminum, brass, bronze, stainless steel
 Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32, US32D
 Notes:

- Type 7 mounting - Standard
- Consists of two (2) pulls back to back
- Available with 45 degree offset
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability
- Supplied with two (2) 1/4" dia. threaded studs, spanner collar, and spanner wrench

CTC Length	21E	21G	21J	21L
Inches	6	8	10	12
Millimeters	152	203	254	305





PULLS



22

Round Offset Push/Pull Set

Certification: Meets ANSI A156.6 for J402 Pulls

Base Diameter: 1" (25 mm)

Projection: 2-3/4" (70 mm)

Clearance: 1-3/4" (45 mm)

Door Thickness: 1-3/4" (45 mm) - 2-1/18" (54 mm) Standard

Offset: 3" (76 mm); 90° standard

Materials: Aluminum, brass, bronze, stainless steel

Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32, US32D

Notes:

- Type 7 mounting - Standard
- Consists of two (2) pulls back to back
- Available with 45 degree offset
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability
- Supplied with two (2) 1/4" dia. threaded studs, spanner collar, and spanner wrench

CTC Length	22G	22J	22L
Inches	8	10	12
Millimeters	203	254	305



23Q

Round Offset Pull

Certification: Meets ANSI A156.6 for J402 Offset Pulls

Base Diameter: 1-1/4" (32 mm)

Projection: 3" (76 mm)

Clearance: 1-3/4" (45 mm)

Offset: 3-3/4" (96 mm); 90° Standard

Door Thickness: 1-3/4" (45 mm) - Standard

CTC Length: 18" (457 mm)

Materials: Aluminum, brass, bronze, stainless steel

Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32, US32D

Fasteners: 5/16-18 x 2-1/4" FPHMS with finish washers

Handicap:

- 2-1/2" (64 mm) clearance available on special orders
- Add prefix "H" to number (i.e., H23Q)

Options: For 45° offset, substitute "X" for first digit (i.e., X23Q)

Notes:

- If ordered with tempered glass, specify glass thickness and hole size
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



24Q

Round Offset Push/Pull Set

Certification: Meets ANSI A156.6 for J402 Offset Pulls

Base Diameter: 1-1/4" (32 mm)

Projection: 3" (76 mm)

Clearance: 1-3/4" (45 mm)

Offset: 3-3/4" (95 mm); 90° standard

Door Thickness: 1-3/4" (45 mm) - 2-1/18" (54 mm) Standard

CTC Length: 18" (457 mm)

Materials: Aluminum, brass, bronze, stainless steel

Finishes: US3, US4, US10, US10B, US26, US26D, US28, US32, US32D

Notes:

- Type 7 mounting - Standard
- Consists of two (2) pulls back to back
- Available with 45 degree offset
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability
- Supplied with two (2) 5/16" dia. threaded studs, spanner collar, and spanner wrench





PULLS

910P | 910B

Offset Mounting Vertical Pull

Pull Diameter:	1-1/4" (32 mm)
O/A Length:	36" (914 mm), 72" (1829 mm)
CTC Lengths:	20" (508 mm), 56" (1422 mm)
Materials:	Aluminum, brass, bronze, stainless steel tubing
Finishes:	US3, US4, US10, US10B, US15A, US26, US26D, US28, US32D
Fasteners:	Two (2) 3/8-16 FPHMS with finish washers
Notes:	• 910B is same as 910P with fasteners for back to back mounting • For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability
Clearance:	1-1/2" (38 mm)
Projection:	2-3/4" (70 mm)
Offset:	1-5/8" (41 mm)



915P | 915B

Straight Mounting Vertical Pull

Pull Diameter:	1-1/4" (32 mm)
O/A Length:	36" (914 mm), 72" (1829 mm)
CTC Lengths:	20" (508 mm), 56" (1422 mm)
Materials:	Aluminum, brass, bronze, stainless steel tubing
Finishes:	US3, US4, US10, US10B, US15A, US26, US26D, US28, US32D
Fasteners:	Two (2) 3/8-16 FPHMS w/ finish washers
Notes:	• 915B is same as 915P with fasteners for back to back mounting • For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability
36" and 20"	
Clearance:	2" (51 mm)
Projection:	3-1/4" (83 mm)
72" and 56"	
Clearance:	1-1/2" (38 mm)
Projection:	2-3/4" (70 mm)





PULLS



920P | 920B

C-Shaped Pull

Base Diameter: 1" (25 mm)
Clearance: 1-3/4" (45 mm)
Projection: 2-1/4" (57 mm)
CTC Length: 8-1/2" (217 mm)
Materials: Aluminum, brass, bronze, stainless steel
Finishes: US3, US4, US10, US10B, US15A, US26, US26D, US28, US32D
Fasteners: Two (2) 3/8-16 FPHMS with finish washers
Notes:

- 920B is pair of 920P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



921P | 921B

C-Shaped Pull

Clearance: 1-1/2" (38 mm)
Offset: 8-1/2" (216 mm)
Projection: 2-1/8" (54 mm)
CTC Length: 17-1/2" (446 mm)
Materials: Brass, bronze, stainless steel
Finishes: US3, US4, US10, US10B, US15A, US26, US26D, US32D
Fasteners: Two (2) 3/8-16 FPHMS with finish washers
Notes:

- 921B is pair of 921P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



922P | 922B

C-Shaped Pull - Continuous

Pull Diameter: 1" (25 mm)
Projection: 2-1/2" (64 mm)
CTC Lengths: 10" (254 mm), 12" (305 mm)
Clearance: 1-1/2" (38 mm)
Materials: Aluminum, brass, bronze, stainless steel
Finishes: US3, US4, US10, US10B, US15A, US26, US26D, US28, US32D
Fasteners: Two (2) 3/8-16 FPHMS with finish washers
Notes:

- 922B is pair of 922P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



923P | 923B

C-Shaped Pull - Flanged

Pull Diameter: 1" (25 mm)
Projection: 2-3/4" (70 mm)
CTC Lengths: 10" (254 mm), 12" (305 mm)
Clearance: 1-3/4" (44 mm)
Base Diameter: 3/4" (19 mm)
Materials: Aluminum, brass, bronze, stainless steel
Finishes: US3, US4, US10, US10B, US15A, US26, US26D, US28, US32D
Fasteners: Two (2) 3/8-16 FPHMS with finish washers
Notes:

- 923B is pair of 923P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability





PULLS



924P | 924B C-Shaped Pull

Projection: 2-1/2" (64 mm)
 CTC Length: 14" (356 mm)
 Clearance: 1-1/2" (38 mm)
 Offset: 6-1/2" (165 mm)
 Materials: Brass, bronze, stainless steel
 Finishes: US3, US4, US10B, US15A, US26, US26D, US32D
 Fasteners: Two (2) 3/8-16 FPHMS with finish washers
 Notes:

- 924B is pair of 924P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



925P | 925B C-Shaped Pull

Pull Diameter: 1-1/4" (32 mm)
 CTC Lengths: 6-1/2" (165 mm), 8-1/2" (217 mm), 12-1/2" (318 mm)
 Materials: Aluminum, brass, bronze, stainless steel
 Finishes: US3, US4, US10B, US15A, US26, US26D, US28, US32D
 Fasteners: Two (2) 3/8-16 FPHMS with finish washers
 Notes:

- 925B is pair of 925P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



926P | 926B Curved Pull

Base Diameter: 1-1/4" (32 mm)
 Projection: 3" (76 mm)
 Clearance: 1-13/16" (46 mm)
 Offset: 5-9/32" (134 mm)
 Pull Diameter: 1-3/16" (30 mm)
 CTC Length: 12" (305 mm)
 Materials: Brass, bronze
 Finishes: US3, US4, US10, US10B
 Fasteners: Two (2) 3/8-16 FPHMS with finish washers
 Notes:

- 926B is pair of 926P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



930P | 930B 90° Pull

Projection: 3" (76 mm)
 Clearance: 1-3/4" (45 mm)
 CTC Lengths: 14-5/32" - 16-31/32" (360 mm - 431 mm)
 Materials: Aluminum, brass, bronze, stainless steel
 Finishes: US3, US4, US10B, US15A, US26, US26D, US28, US32D
 Fasteners: Two (2) 3/8-16 FPHMS with finish washers
 Notes:

- 930B is pair of 930P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



PULLS



932P | 932B S-Shaped Pull

Projection: 3" (76 mm)
Clearance: 2" (51 mm)
Pull Diameter: 1" (25 mm)
Fasteners: Two (2) 3/8-16 FPHMS w/ finish washers
CTC Length: 30" (762 mm)
Materials: Aluminum, brass, bronze, stainless steel
Finishes: US3, US4, US10B, US15A, US26, US26D, US28, US32D
Fasteners: Two (2) 3/8-16 FPHMS with finish washers
Notes:

- 932B is pair of 932P with fasteners for back to back mounting
- Specify handing when ordering
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



933P | 933B Colonial Style Pull

Projection: 2-3/16" (56 mm)
Clearance: 1-3/16" (30 mm)
Pull Diameter: 1" (25 mm)
Base Diameter: 15/16" (24 mm)
CTC Length: 6" (152 mm)
Materials: Brass and bronze
Finishes: US3, US4, US10B, US26
Fasteners: Two (2) 3/8-16 FPHMS with finish washers
Notes: 933B is pair of 933P with fasteners for back to back mounting



934P | 934B Offset Pull

Projection: 3-1/8" (80 mm)
Clearance: 1-7/8" (48 mm)
Pull Diameter: 1-1/4" (32 mm)
Base Diameter: 1" (25 mm)
CTC Lengths: 12" (305 mm), 16" (406 mm), 18" (457 mm)
Materials: Aluminum, brass, bronze, stainless steel
Finishes: US3, US4, US10B, US15A, US26, US26D, US28, US32D
Fasteners: Two (2) 3/8-16 FPHMS with finish washers
Notes: 934B is pair of 934P with fasteners for back to back mounting



960P | 960B Square Tip Pull

O/A Height: 16" (406 mm)
Base Diameter: 1-1/4" (32 mm)
Pull Diameter: 1" (25 mm)
Clearance: 1-3/4" (45 mm)
Projection: 3-1/4" (83 mm)
CTC Length: 12" (305 mm)
Materials: Brass, bronze
Finishes: US3, US4, US10B, US15A, US26, US26D
Fasteners: Two (2) 3/8-16 FPHMS w/ finish washers
Notes:

- 960B is pair of 960P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability





PULLS



961P | 961B Steeple Tip Pull


O/A Height: 16-5/16" (414 mm)
 Base Diameter: 2" (51 mm)
 Pull Diameter: 1" (25 mm)
 Clearance: 1-3/4" (45 mm)
 Projection: 3" (76 mm)
 CTC Length: 12" (305 mm)
 Materials: Brass, bronze
 Finishes: US3, US4, US10B, US15A, US26, US26D
 Fasteners: Two (2) 3/8-16 FPHMS with finish washers
 Notes:

- 961B is pair of 961P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



962P Acorn Tip Pull

O/A Height: 16-5/16" (414 mm)
 Base Diameter: 2" (51 mm)
 Pull Diameter: 1" (25 mm)
 Projection: 3" (76 mm)
 Clearance: 1-7/8" (48 mm)
 CTC Length: 12" (305 mm)
 Materials: Brass, bronze
 Finishes: US3, US4, US10B, US15A, US26, US26D
 Fasteners: Two (2) 3/8-16 FPHMS with finish washers
 Notes: For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



963P Acorn Pull - Offset

O/A Height: 16-5/16" (414 mm)
 Pull Diameter: 1" (25 mm)
 Projection: 2-3/4" (70 mm)
 CTC Lengths: 12" (304 mm), 16" (406 mm), 18" (457 mm), 24" (610 mm), 30" (762 mm)
 Materials: Cast brass, bronze
 Finishes: US3, US4, US10B, US15A, US26, US26D
 Fasteners: Two (2) 3/8-16 FPHMS with finish washers
 Notes: For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



967P Curved Pull

O/A Height: 20-1/2" (520 mm)
 Projection: 5-9/16" (141 mm)
 Clearance: 3-9/16" (90 mm)
 CTC Length: 16" (406 mm)
 Materials: Brass, bronze
 Finishes: US3, US4, US10B, US15A, US26, US26D
 Fasteners: Two (2) 3/8-16 FPHMS with finish washers
 Notes: For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



PULLS



970P

Custom Push/Pull Set

Base Diameter:	1" (25 mm)
Pull Projection:	3" (76 mm)
Pull Clearance:	2" (51 mm)
CTC Length:	13-1/4" (337 mm)
Push Projection:	2-3/4" (70 mm)
Push Clearance:	1-3/4" (45 mm)
CTC Length:	34" (864 mm) or to suit door dimension
Materials:	Brass, bronze, stainless steel
Finishes:	US3, US4, US10, US10B, US15A, US26, US26D, US32D
Fasteners:	3/8 x 16 Type 3 mounting, concealed cone with 3/8 x 16 Type 2 thru bolts and finish washer

Notes:

- Pull or push bar can be ordered separately by quotation only
- Push bar radius can be custom made so the radius points in the downward direction
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



974P | 974B

Door Pull

Projection:	2-1/2" (64 mm)
CTC Length:	12" (304 mm), 18" (457 mm), 24" (610 mm), 30" (762 mm), 36" (914 mm), 48" (1219 mm)

Materials:	Brass, bronze, stainless steel
Finishes:	US3, US4, US10B, US26, US26D, US32D
Fasteners:	Two (2) 3/8-16 FPHMS with finish washers

Notes:

- 974B is pair of 974P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



975P | 975B

Vertical Pull

Projection:	2-3/4" (70 mm)
O/A Length:	36" (914 mm), 72" (1829 mm)
CTC Length:	20" (508 mm), 56" (1422 mm)
Pull Diameter:	1" (25 mm)

Materials:	Brass, bronze, stainless steel
Finishes:	US3, US4, US10, US10B, US15A, US26, US26D, US32D
Fasteners:	Two (2) 3/8-16 FPHMS with finish washers

Notes:

- 975B is pair of 975P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability





PULLS



976P | 976B Door Pull - Offset

O/A Height:	29-1/2" (750 mm)
Base Diameter:	1-1/4" (32 mm)
Pull Diameter:	1-1/4" (32 mm)
Projection:	5-3/8" (137 mm)
Clearance:	4-1/8" (105 mm)
Offset:	1-3/4" (45 mm)
CTC Length:	19-13/16" (503 mm)
Materials:	Stainless steel
Finish:	US32D
Fasteners:	Two (2) 3/8-16 FPHMS with finish washers
Notes:	• 976B is pair of 976P with fasteners for back to back mounting • For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



980P | 980B Segment Shape - Straight

CTC Length:	9" (229 mm), 12" (305 mm), 18" (457 mm), 24" (610 mm)
Materials:	Brass, bronze, stainless steel
Finishes:	US3, US4, US10B, US15A, US26, US26D, US32D
Fasteners:	Two (2) 3/8-16 FPHMS with finish washers
Notes:	• 980B is pair of 980P with fasteners for back to back mounting • For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



981P | 981B Segment Shape - Offset

Projection:	2-3/8" (60 mm)
CTC Length:	9" (229 mm), 12" (305 mm), 18" (457 mm), 24" (610 mm)
Materials:	Brass, bronze, stainless steel
Finishes:	US3, US4, US10B, US15A, US26, US26D, US32D
Fasteners:	Two (2) 3/8-16 FPHMS with finish washers
Notes:	• 981B is pair of 981P with fasteners for back to back mounting • For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



982P | 982B Straight Pull

Base Diameter:	1-5/16" (33 mm)
Projection:	3-1/8" (79 mm)
Clearance:	1-13/16" (46 mm)
CTC Length:	20" (508 mm)
Materials:	Brass, bronze, stainless steel
Finishes:	US3, US4, US10B, US15A, US26, US26D, US32D
Fasteners:	Two (2) 3/8-16 FPHMS with finish washers
Notes:	• 982B is pair of 982P with fasteners for back to back mounting • For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



PULLS



983P | 983B

Curved Pull

O/A Height: 21-1/4" (540 mm)

Base Diameter: 1-1/4" (32 mm)

Projection: 3-1/8" (79 mm)

Clearance: 1-7/8" (48 mm)

CTC Length: 20" (508 mm)

Materials: Brass, bronze, stainless steel

Finishes: US3, US4, US10B, US15A, US26, US26D, US32D

Fasteners: Two (2) 3/8-16 FPHMS with finish washers

Notes:

- 983B is pair of 983P with fasteners for back to back mounting
- Specify handing when ordering
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



984P | 984B

Curved Pull

Projection: 3" (76 mm)

CTC Lengths: 12" (305 mm), 20" (508 mm)

Materials: Brass, bronze, stainless steel

Finishes: US3, US4, US10B, US15A, US26, US32, US32D

Fasteners: Two (2) 3/8-16 FPHMS with finish washers

Notes:

- 984B is pair of 984P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



985P | 985B

Curved Pull

O/A Height: 14" (356 mm)

Base Diameter: 2" (51 mm)

Projection: 3" (76 mm)

Clearance: 1-9/16" (40 mm)

Offset: 1-5/8" (41 mm)

CTC Length: 12" (305 mm)

Materials: Brass, bronze, stainless steel

Finishes: US3, US4, US10B, US15A, US26, US26D, US32D

Fasteners: Two (2) 3/8-16 FPHMS with finish washers

Notes:

- 985B is pair of 985P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



986P | 986B

Curved Pull

O/A Height: 22" (559 mm)

Pull Diameter: 1-1/4" (32 mm)

Base Diameter: 2" (51 mm)

Projection: 3-7/8" (99 mm)

Clearance: 2-5/8" (67 mm)

Offset: 3" (76 mm)

CTC Length: 20" (508 mm)

Materials: Brass, bronze, stainless steel

Finishes: US3, US4, US10B, US15A, US26, US26D, US32

Fasteners: Two (2) 3/8-16 FPHMS with finish washers

Notes:

- 986B is pair of 986P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability





PULLS



987P | 987B Double Curved Pull

Base Diameter: 1-1/4" (32 mm)

Projection: 3" (76 mm)

Clearance: 2" (51 mm)

CTC Length: 20" (508 mm)

Materials: Brass, bronze, stainless steel

Finishes: US3, US4, US10B, US15A, US26, US26D, US32D

Fasteners: Two (2) 3/8-16 FPHMS with finish washers

Notes:

- 987B is pair of 987P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



988P | 988B Offset Pull

Projection: 3" (76 mm)

CTC Length: 24" (610 mm)

Materials: Brass, bronze, stainless steel

Finishes: US3, US26, US32D

Fasteners: Two (2) 3/8-16 FPHMS with finish washers

Notes:

- 988B is pair of 988P with fasteners for back to back mounting
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability



990P | 990B 18° Pull

Pull Diameter: 1" (25 mm)

Projection: 2-3/4" (70 mm)

Clearance: 1-3/4" (45 mm)

CTC Length: 24" (610 mm)

Materials: Brass, bronze, stainless steel

Finishes: US3, US4, US10B, US15A, US26, US26D, US32D

Fasteners: Two (2) 3/8-16 FPHMS with finish washers

Notes:

- 990B is pair of 990P with fasteners for back to back mounting
- Specify handing when ordering
- For sizes or finishes not listed in this catalog, contact Hager Customer Service for availability