

STAINLESS STEEL BRACKETS

SOFFIT FIXED

4/SS	Dimensions					
	A	B	C	D	E	Bolt
4/290/SS	2-7/8"	-	1-5/8"	3-1/2"	2-1/2"	M8
4/301/SS	3-7/8"	-	2-3/8"	5-3/8"	4-1/8"	M10


4R/SS	Dimensions					
	A	B	C	D		Bolt
4R/280/SS	2"	2"	1-1/2"	1-1/2"		M8
4R/290/SS	2"	1-5/8"	2"	2-1/4"		M10
4R/301/SS	2-1/2"	2-5/8"	2-5/8"	3-1/8"		M12

4X/SS	Dimensions					
	A	B	C	D		Bolt
4X/290/SS	-	3-7/8"	2"	2-1/4"		M10
4X/301/SS	-	4-1/2"	2-5/8"	3-1/8"		M12


4RX/SS	Dimensions					
	A	B	C	D		Bolt
4RX/280/SS	2"	2"	1-1/2"	1-1/2"		M8
4RX/290/SS	2"	3-7/8"	2"	2-1/4"		M10
4RX/301/SS	2-1/2"	4-1/2"	2-5/8"	3-1/8"		M12

HH3/SS	Dimensions		
	A	B	C
HH3/290/SS	1-1/4"	1-1/4"	4"
HH3/301/SS	1-5/8"	1-5/8"	5"


109/SS	Dimensions		
	A	B	C
109/SS	2-1/2"	2"	1/2"

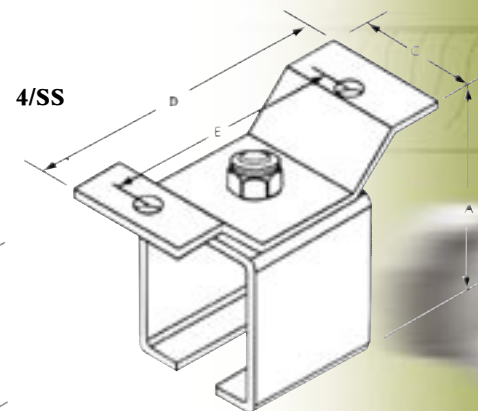


4/SS

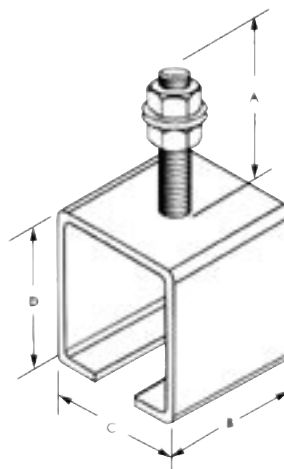


4R/SS

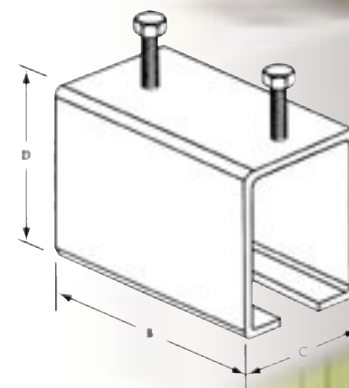

4X/SS

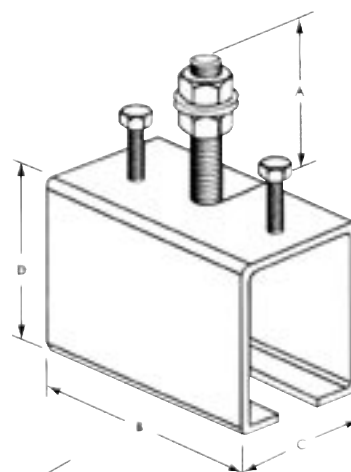


4RX/SS



HH3/SS

HH3/SS Stops

Stops HH3/290/SS and HH3/301/SS for fitting in 290 and 301 track. Complete with rubber stop and grade 304(A2) stainless steel hexagonal screws.



109/SS

109/SS Doorstop

Doorstops can be fitted at ground height or on the wall of an opening. (2/3 of the door height from the ground).