



FULL HEIGHT PULLS

DESCRIPTION

Beautiful full-length pulls provide strength and enhance the aesthetics of upscale entrances. Available in 1", 1-1/4" and 1-1/2" diameter in lengths to 96". Specify radius bends or standoffs. Intermediate standoffs also available for extra strength in high traffic areas. Offset full height pulls are also available.

MATERIAL

Aluminum, brass, bronze, stainless steel. Aluminum pulls are solid.

METAL FINISHES

Available in standard architectural finishes.

Special Metal Finish

Most models available in US323SS or US32DSS performance finish. See page 1. Models with asterisk * available in antimicrobial finish. See page 1.

RECOMMENDATION

We strongly recommend an intermediate third mounting point on door pulls longer than 80" to prevent deflection during use. (Note drawings) Please specify straight

intermediate post used on medium, wide style, and flush doors or offset intermediate post used on narrow style aluminum doors.

SPECIFICATION

For a typical specification, include Hia-watha's full height door pull number, pull diameter, mounting type, door size and thickness, and door finish.


These door pulls are made to order. A detailed drawing for your approval will be provided prior to fabrication.



STRAIGHT PULLS - BENT ENDS		
PULL NO.	DIA.	PROJECTION
1010*	1"	2-3/4"
1020*	1-1/4"	2-3/4"
1030*	1-1/2"	3"

STRAIGHT PULLS - ROUND ENDS		
PULL NO.	DIA.	PROJECTION
1110*	1"	3"
1120*	1-1/4"	3"
1130*	1-1/2"	3-1/2"

STRAIGHT PULLS - SQUARE ENDS		
PULL NO.	DIA.	PROJECTION
1210*	1"	3"
1220*	1-1/4"	3"
1230*	1-1/2"	3-1/2"

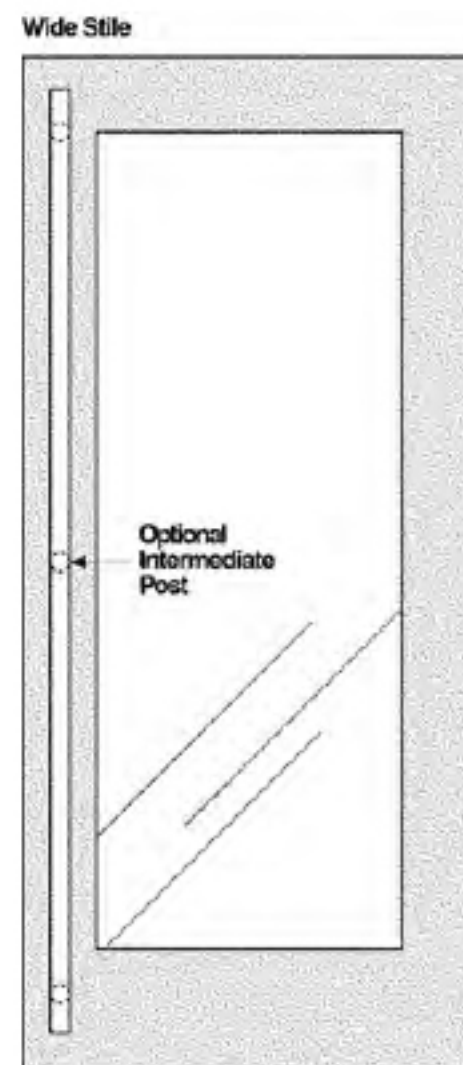

1010/ 1020/ 1030



1110/1120/1130



1210/1220/1230