




MANUAL FLUSH BOLTS

MANUAL FLUSH BOLTS

Manual Flush Bolts are installed in the inactive door. The lever mechanism extends the bolt head 3/4" into the frame and sill strike, locking inactive door. All rods have 2" adjustment for door and strike clearance.

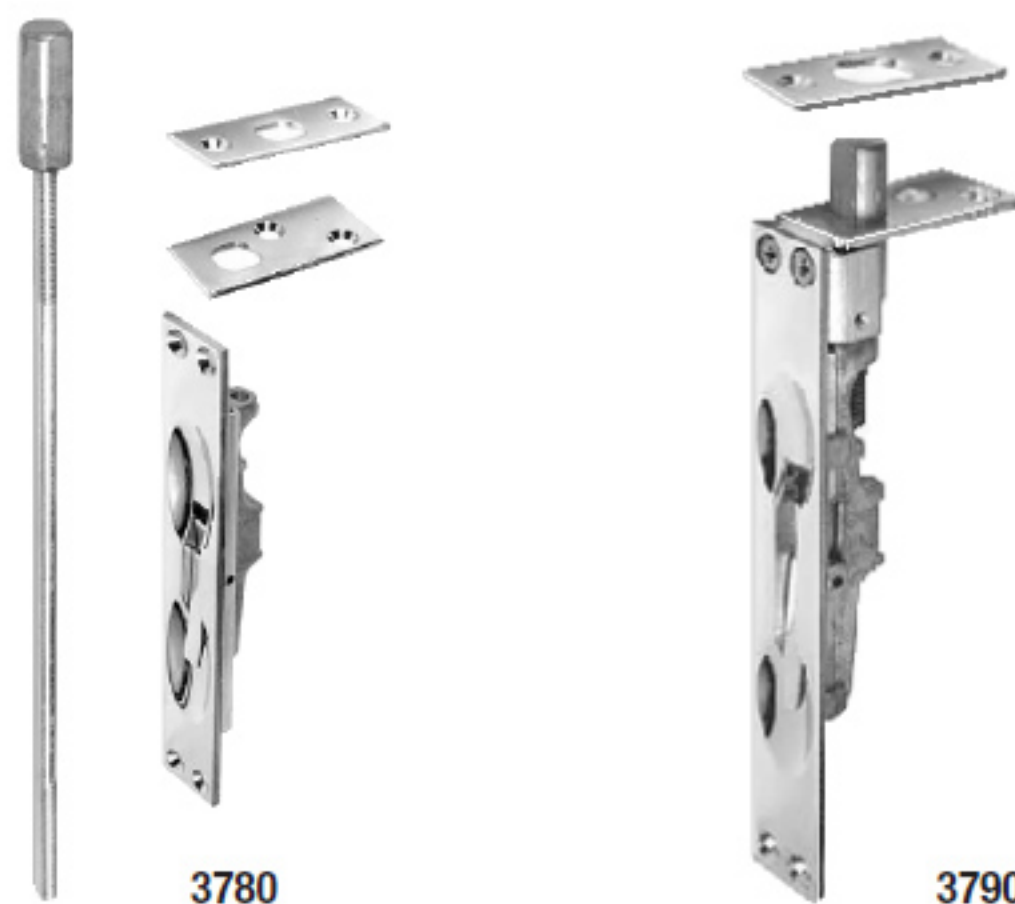

3780

3790

Manual Flush Bolts (UL Listed)			
FIRE-RATED METAL DOORS		WT.	ANSI/BHMA
3780F	Manual Bolt - 3 Hour Fire Rating: For up to 8' x 10' metal doors. Solid Brass or Bronze material. Bolts can be vertically adjusted up to 1/2". Face Plate 1" x 6-3/4", overall length 12", top strikes 1-5/16" x 1-5/8" and 1" x 2".	1 lb.	156.16, L14251 Top Strike: A115.4
FIRE-RATED WOOD DOORS			ANSI/BHMA
3790F	Manual Bolt - 1-1/2 Hour Fire Rating: For up to 8' x 10' wood doors. Solid Brass or Bronze material. Bolts can be vertically adjusted up to 1/2". Face Plate 1" x 6-3/4", overall length 6-3/4", top strikes 15/16" x 2-1/4" and 1" x 2-1/12".	1 lb.	156.16, L14251 Top Strike: A115.4

Standard Finishes: US 3,4,10,10B, 26, 26D, 32, 32D



BFBM & BFBW



380



381



382

FIRE BOLTS, STRIKES & TRIM		WT.	ANSI/BHMA
BFBM	Bottom Fire Bolt, UL Listed to pairs of fire doors when specified with an automatic and self latching top flush bolt models 3140 or 3805. US32D. Bolt projects at 230°F, locking leaves.	.1 lb.	630
BFBW	Bottom Fire Bolt, UL Listed to pairs of fire doors when specified with an automatic and self latching top flush bolt models 3240, 3905 or 3660. US32D. Bolt projects at 230°F, locking leaves.	.1 lb.	630
380	Dust Proof Strike: 2" deep for floor installation. Face plate 1-1/2" x 3" in US32D or US32 finish. 2 fasteners #8 x 3/4" APA with Rawl plug. 1" x 2-1/8" prep hole for 3/4" bolt	.4 lb.	156.16, L04021
381	Dust Proof Strike: 2" deep for threshold installation. Std Finish US32D or US32. 1 Tru Arc ring fastener. 1" x 2-1/8" prep hole for 3/4" bolt.	.4 lb.	156.16, L04021
382	Dust Proof Universal Strike: 2" deep for threshold or floor installation. US 3, 4,10, 10B, 26, 26D finishes available. Adjustable plate for carpet, threshold or concrete includes lock nut and screw package for all installations. 1" x 2" prep hole for 3/4" bolt.	.1 lb.	156.16, L04021
-T	Flush Bolt Trim Package: US 3,4,10,10B, 26,26D, 32, 32D. Add "T" to Model Number.	—	—