


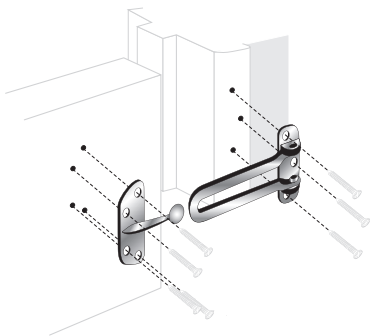

Installation Instructions for EDL-100:

1. With door closed place the Lock Arm 3/8" from the edge of the door at a comfortable height.
2. Mark the holes and drill 3/32" pilot holes and screw the part to the door.
3. Place the Hinged Loop on the door jamb with the Lock Arm centered in the Hinged Loop.
4. Check the location to insure proper locking and unlocking operation.
5. Mark holes on the Hinged Loop. Install one screw and re-check to insure proper operation and then install the remaining screws.

Instrucciones de instalación para EDL-100:

1. Cierre la puerta y coloque la bisagra con el brazo a una distancia de 9.5mm de la orilla de la puerta a la altura deseada.
2. Marque y taladre unos agujeros de 2.3mm e instale la bisagra en la puerta.
3. Coloque la bisagra con la ranura en la jamba y asegurese de que este centrada con la otra bisagra.
4. Verifique que estén en la posición correcta para poder atrancar y desatrarcar.
5. Marque los agujeros de la bisagra con la ranura. Instale un tornillo y vuelva a inspeccionar que funcionen correctamente y después instale los tornillos restantes.

Pro-Lok® And Entry Armor® Are Trademarks Of Weinraub Enterprises, Inc. © 2011. www.ENTRYARMOR.com

Item # EDL-100-B



6 38246 31079 1



EDL-100-B

UPC: 638246310791



EDL-100-C

UPC: 638246310807