



Ives Continuous Hinge - EPT & TW Order Detail


**EPT
112HD**

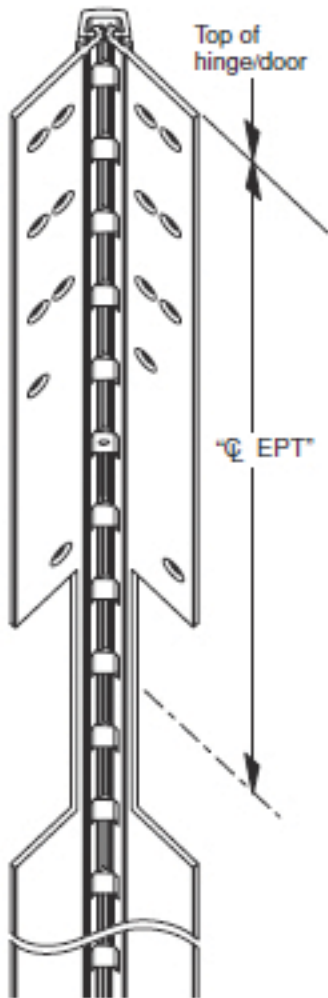

**EPT
224HD**

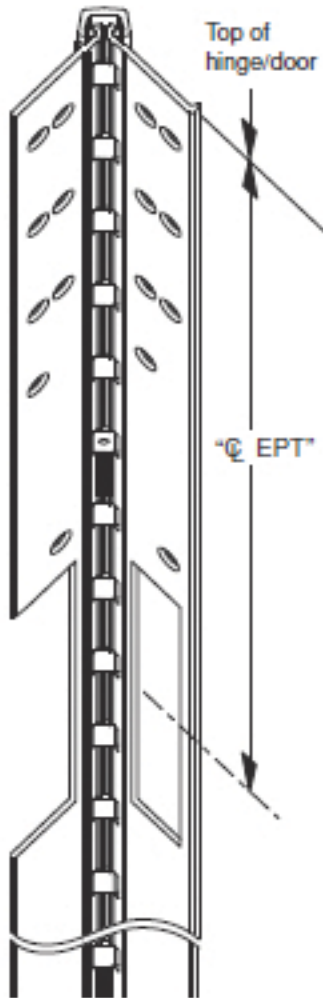

**TW
112HD
224HD**

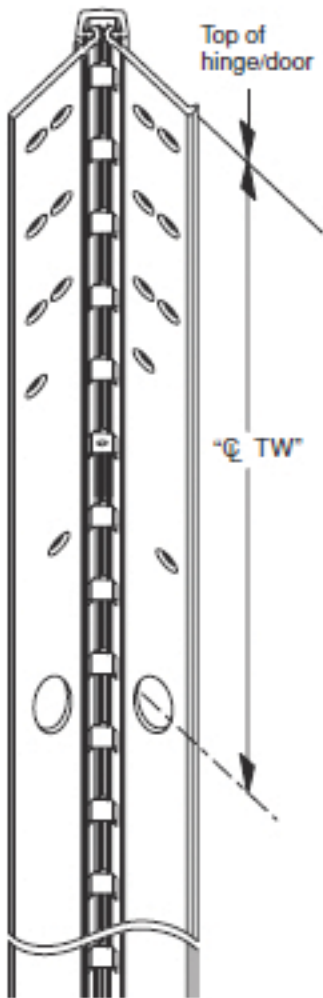

Ives Aluminum Geared Continuous Hinges are available with factory modified cutouts to accommodate most electrical frame to door requirements. Special templates are required.

When ordering indicate the following:

- 1. Opening size.
- 2. Handing. LH, RH, RHR or LHR.
- 3. Manufacturer and model number of the electrical product being used. Example; Von Duprin EPT2

Because clearances may vary between door and frame manufacturer, and locations can be influenced by the door hardware it is always recommend contacting Ives Customer Technical for specific template information.

For your general information below are standard locations for Von Duprin EPT2 or EPT10, and monitor switch.

From Top Edge of Door to Center Line of Cut-Out

Standard Length	112HD EPT	224HD EPT	112HD/224HD TW
83"	30"	30"	41-1/2"
85"	32"	32"	42-1/2"
95"	42"	42"	57-3/4"
120"	67"	67"	81-25/32"

Note: See ordering guide in price book for proper placement.

TWP option centered in hinge.

Please supply the following information

_____ Length of Continuous Hinge

_____ Indicate RH or LH

_____ EPT Location