


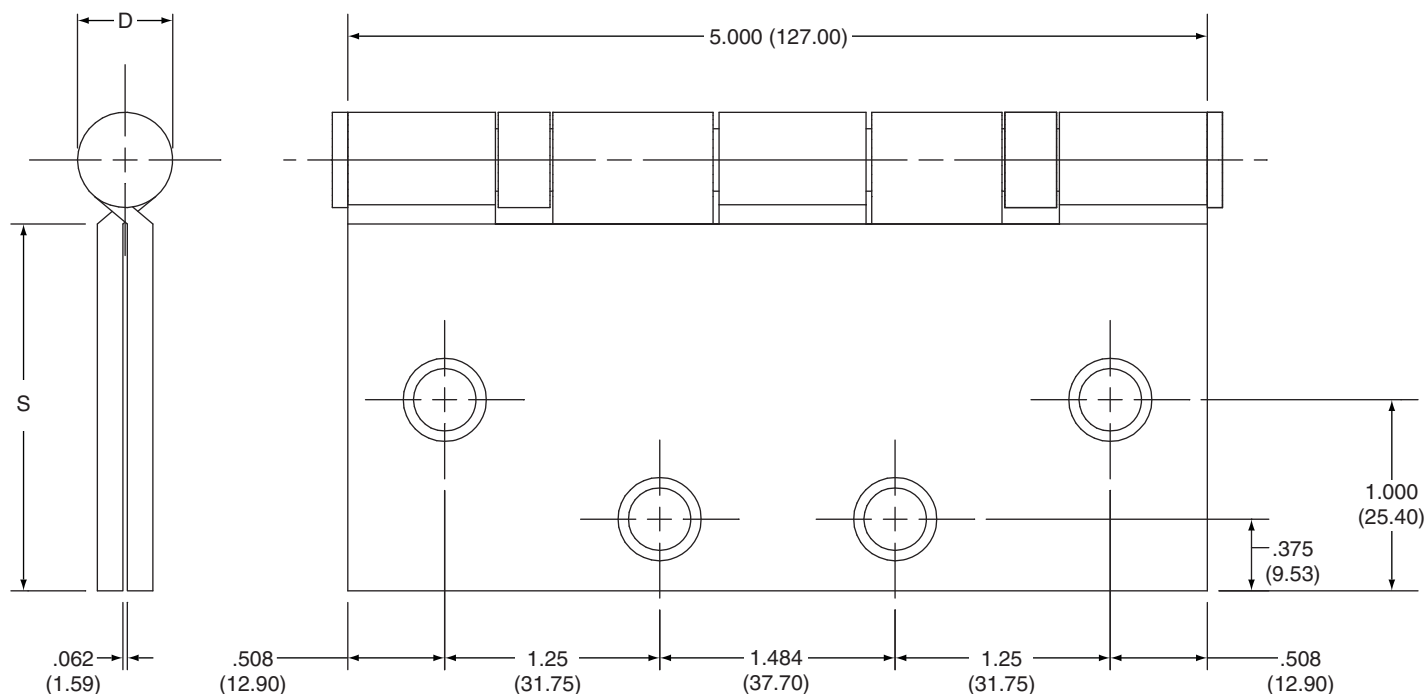

- DO NOT SCALE -

Hinge Model	Hinge Weight	Metal Gauge	(D) Knuckle Diameter	(S) Distance From Edge of Leaf to Swag Line				
				5 x 4 (127.00 x 101.60)	5 x 4½ (127.00 x 114.30)	5 x 5 (127.00 x 127.00)	5 x 6 (127.00 x 152.40)	5 x 8 (127.00 x 203.20)
5BB1	Standard	.146 (3.71)	.609 (15.48)	1.625 (41.28)	1.875 (47.63)	2.000 (50.8)	2.625 (66.68)	3.625 (92.08)
3CB1HW 5BB1HW	Heavy Weight	.190 (4.83)	.703 (17.86)	1.562 (39.69)	1.812 (46.04)	2.062 (52.39)	--	--

Machine Screw Size: 12-24 x ½" F.H.

Wood Screw Size: #12 x 1¼" F.H.

Notes:

1. Round Corners (RC) application will have ¼" (6.35) radius corners, but will conform to template as shown above the other radius corners.
2. Hospital Tips (HT) application will conform to template as shown above.
3. Security Stud (SH) application will conform to template as shown above.
4. For High Security Stud (ST) application, see template for High Security Stud (ST) hinge.

INGERSOLL RAND COMPANY HINGES ARE MADE IN SIZE, GAUGE
AND WITH SCREW HOLES LOCATED TO CONFORM TO ANSI - A156.7.



5" FULL MORTISE HINGE TEMPLATE



Note: Dimensions in () are millimeters

Template Number

INST.5HG_1

Date:
01/01/2009