


- NOTES:
1. INSTALLER MUST VERIFY THAT CENTERLINE OF INTERMEDIATE PIVOT IS IN LINE WITH TOP AND BOTTOM PIVOTS.
 2. PIVOT SET IS HANDED. RIGHT HAND TEMPLATING SHOWN. LEFT HAND OPPOSITE.
 3. HEEL EDGE OF DOOR MUST BE BEVELED 1/8" IN 2".
 4. PIVOTS MANUFACTURER TO ACCEPT 1/4-20 X 3/4 FPHMS OR #14 X 1 1/2" FPHWS.
 5. VERTICAL LOCATION OF INTERMEDIATE PIVOT SHOULD BE EQUALLY SPACED BETWEEN TOP & BOTTOM PIVOT SETS.
 6. REINFORCING PER ANSI/SDI-100 RECOMMENDED FOR HOLLOW METAL DOORS & FRAMES.

RIGHT HAND DOOR & PIVOT SHOWN. LEFT HAND OPPOSITE.

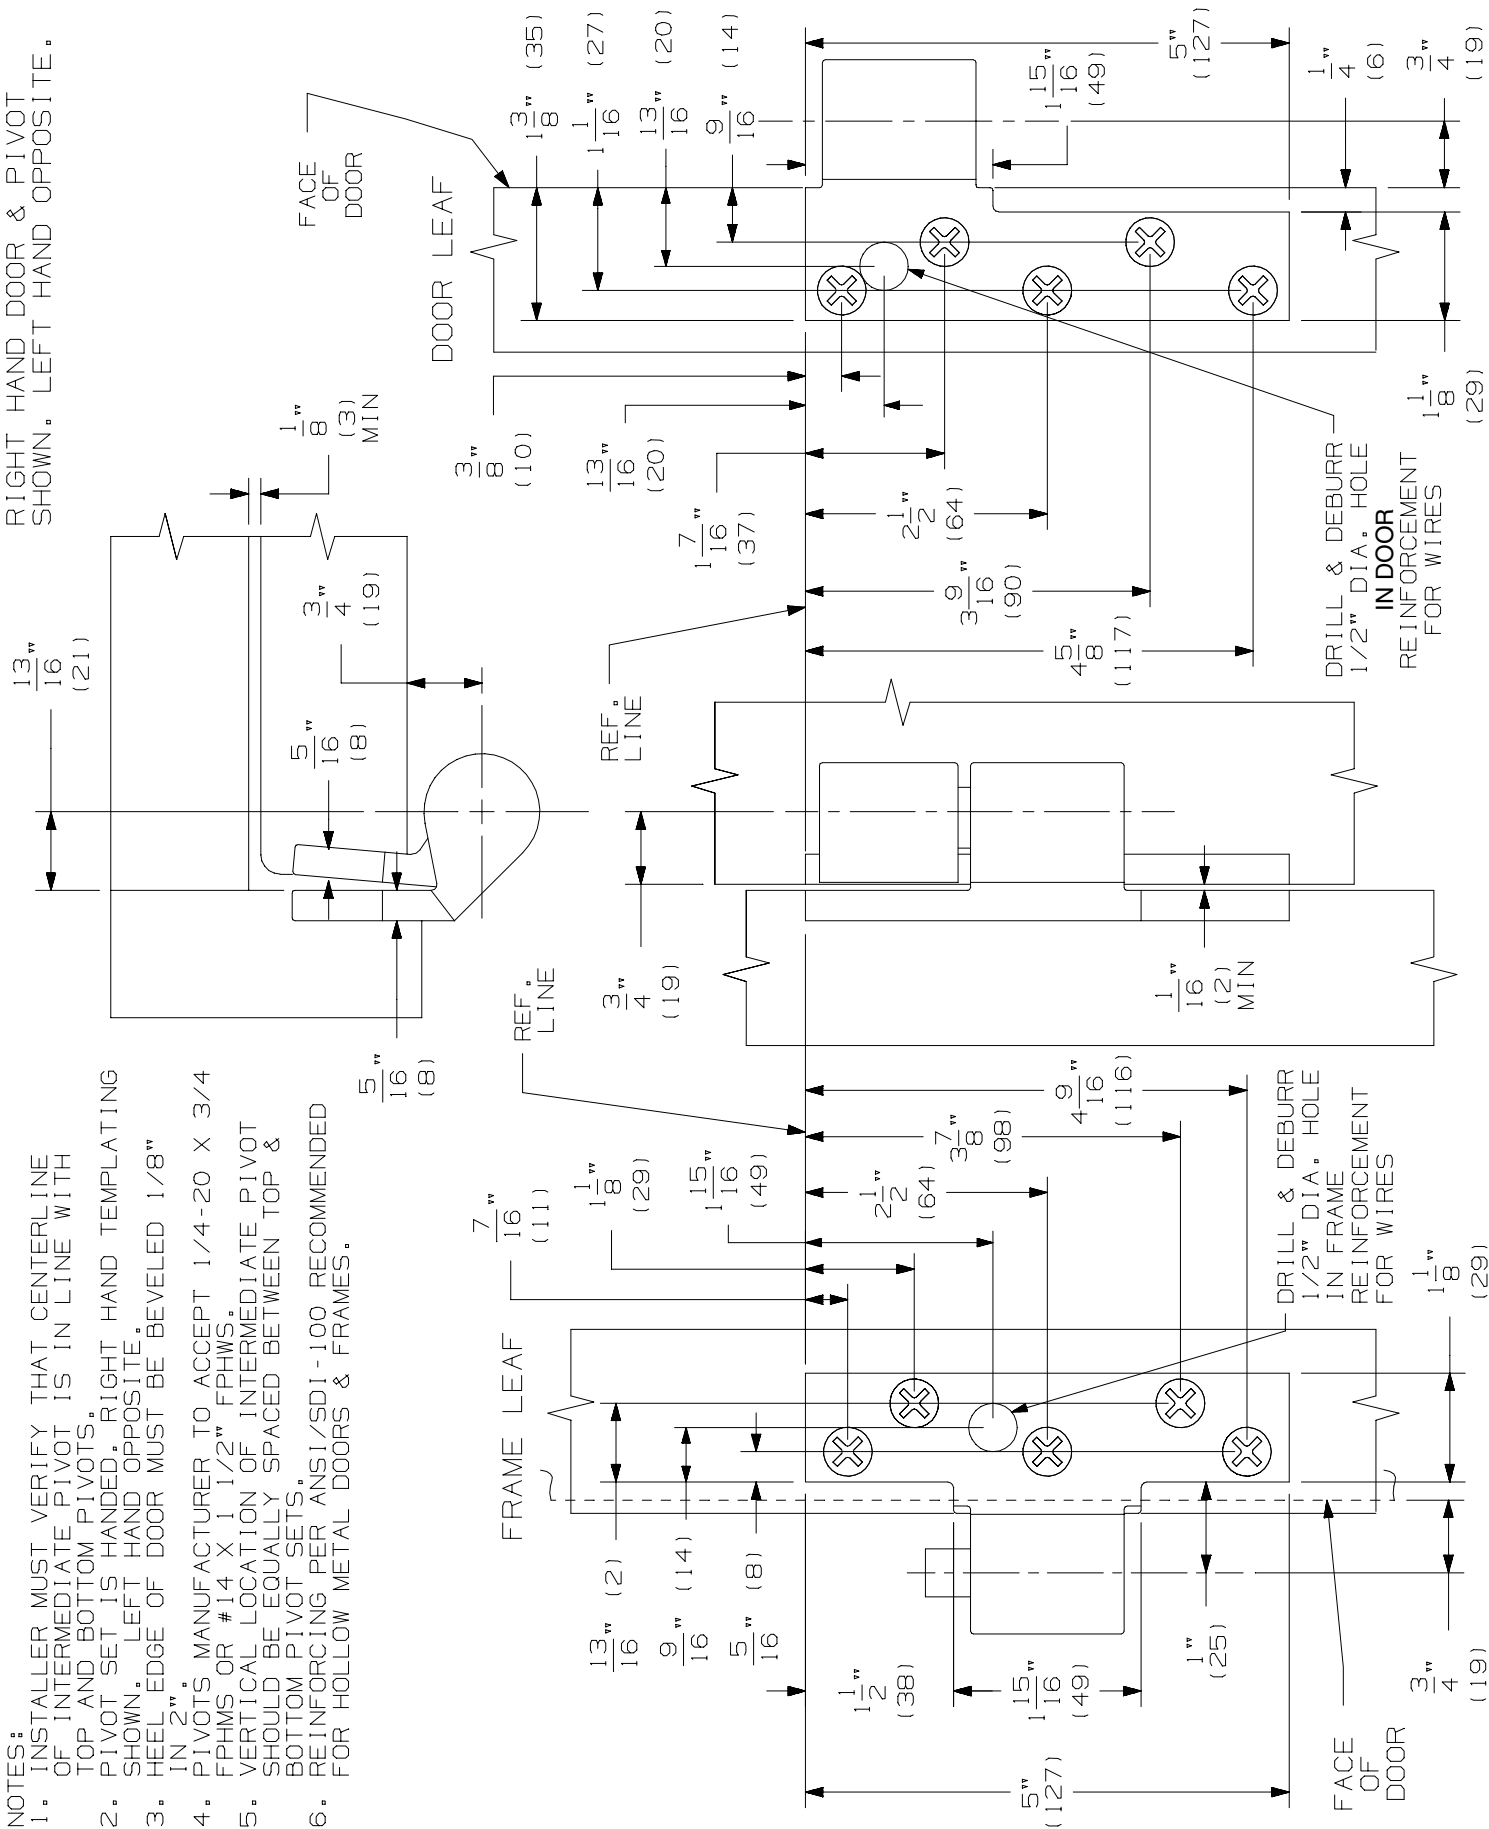

IVES

7215PT INTERMEDIATE PIVOT
USED IN PIVOT SETS 7215,
7226 & 7227

ALLEGION

NOTE: DIMENSIONS IN () ARE MILLIMETERS.

TEMPLATE
NUMBER:

INST.7215IPT_b

DATE:
07-14-14