



### FS439 Universal Dome Floor Stop

- High or Low-Rise Mount
- Zinc or Stainless Steel
- Spring-loaded Rubber Contact
- Replaceable Rubber Bumper

#### Dimensions

Overall Height: 1-1/2"

Pad Height: 1-1/8"

Base Height: 1/4"

Base Diameter: 1-7/8"

#### Finishes

Ives Number	US3	US4	US10B	US26D	US32D
-------------	-----	-----	-------	-------	-------

BHMA	677	678	704	682	630
------	-----	-----	-----	-----	-----



### FS410 Decorative Floor Stop

- Non-directional
- Cast Brass Construction
- Replaceable Rubber Bumper

#### Dimensions

Overall Height: 1-1/2"

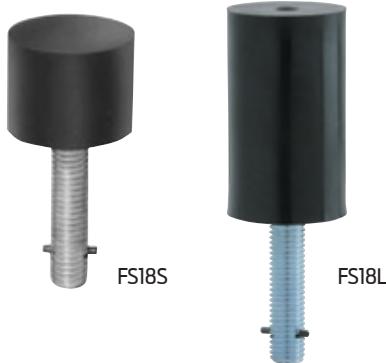
Bumper Thickness: 1/4"

Diameter: 1-1/4"

#### Finishes

Ives Number	US3	US26D
-------------	-----	-------

BHMA	605	626
------	-----	-----

**FS18S****FS18L Floor Stops**

- Security Door Stops designed for use in high vandalism areas.
- Molded from black flame resistant, resilient material around a heavy-duty stud.
- Once grouted in concrete, leaves no exposed fasteners to be tampered with or removed.
- Ideal for jail or security cell areas where floor mounted stops are required.
- FS18L also ideal for concrete wall applications.

**Dimensions**

FS18S Height: 1-1/2"      FS18L Height: 3-1/2"

FS18S Diameter: 2"      FS18L Diameter: 2"

FS18S Stud Length: 2-1/2"      FS18L Stud Length: 2-1/2"

**FS434 Floor Stop**

- Burnished wrought steel.
- For undercut doors up to 1-1/2".
- Packed with screws and plastic anchors.
- Replaceable soft, resilient gray rubber.

**Dimensions**

Overall Height: 2-5/8"

Base Size: 1-1/2" W x 2-3/4" L

**Finishes**

Ives Number      USC

BHMA      604

**430 Floor Door Stop**

- Burnished wrought steel.
- For undercut doors up to 1-1/2".
- Packed with screws and plastic anchors.
- Replaceable soft, resilient gray rubber.

**Dimensions**

Overall Height: 1-5/16"

Base Diameter: 1-1/4"

**Finishes brass**

Ives Number	B3	B4	B5	B10B	B15	B26	B26D
BHMA	605	606	609	613	619	625	626

**Finishes aluminum**

Ives Number	A3*	A5	A14	A92
BHMA	666		669	673

\* only available in Slim-Pak of 25

A  
Hinges & PivotsB  
Pulls & PlatesC  
Flush Bolts & CoordinatorsD  
Latches, Catches & BoltsE5  
StopsF  
Exterior HardwareG  
Miscellaneous Hardware



Meets ANSI/BHMA 156.16, L12131 for brass

### FS441

### Floor Stop

- Accommodates door undercut up to 1-1/2".
- Designed to blend well with all types of construction and provide a minimum of hindrance to cleaning efforts.
- Heavy-Duty cast brass or aluminum construction.
- Replaceable Non-marring rubber bumper.

FS441 packed with expansion shield and tampin for masonry type mounting, and wood screws for drywall mounting.

#### Dimensions

Overall Height: 2-1/8"

Overall Length: 2-7/8"

Base Depth: 1-5/8"

#### Finishes brass

Ives Number	US3	US4	US5	US10	US10B	US15	US26	US26D
BHMA	605	606	609	612	613	619	625	626



FS444

Meets ANSI/BHMA 156.16, L12131 for brass

FS448

Meets ANSI/BHMA 156.16, L12121 for brass and L32121 for aluminum

### FS444 Floor Stop

### FS448 Floor Stop

- Ideal for interior or exterior use.
- Cast brass construction.
- Accommodates door undercut up to 2-1/2".
- Replaceable Non-marring rubber tip.

FS444 is packed with expansion shield and lead shield, for masonry type mounting. FS448 is packed with wood screws, for drywall mounting.

#### Dimensions

Overall Height: 3"

Base Diameter: 2-1/2"

#### Finishes brass

Ives Number	US3	US4	US5*	US10	US10B	US15	US26	US26D
BHMA	605	606	609	612	613	619	625	626

#### Finishes aluminum

Ives Number	US28*
BHMA	628

\* not available on FS444

A  
Hinges & Pivots

B  
Pulls & Plates

C  
Flush Bolts & Coordinators

D  
Latches, Catches & Bolts

E6  
Stops

F  
Exterior Hardware

G  
Miscellaneous Hardware