



INST.LG1014


LG10, LG11, LG12, LG13, & LG14

IVES

Lock Guard


Installation Instructions

1.

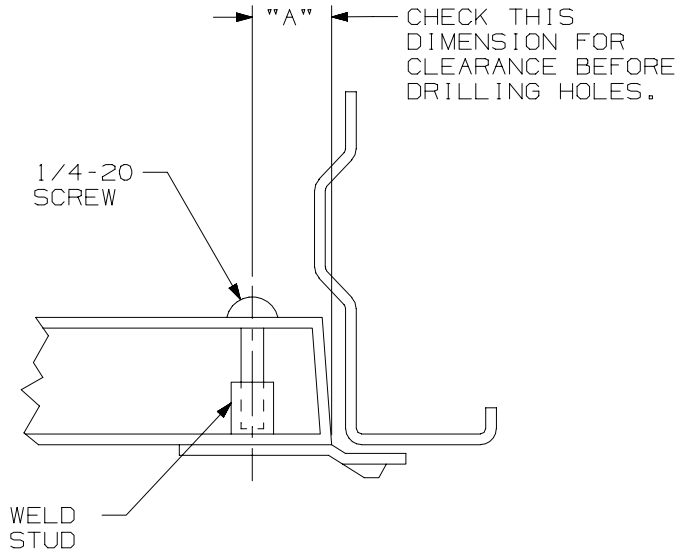


NOTE: THE DIMPLE DEPTH IS 1/4" (6MM)

3.

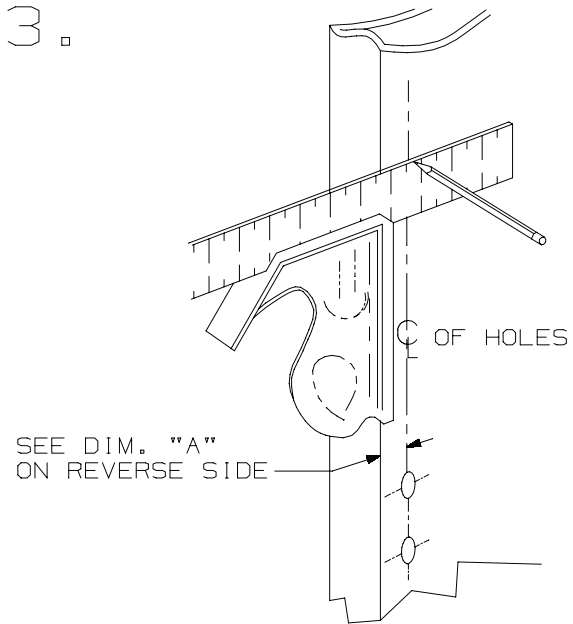


1. MARK HOLES ON EACH SIDE OF DOOR.
2. SUBTRACT 1/8" (3) FROM CENTERLINE OF HOLES ON SHORT SIDE OF BEVEL

2.

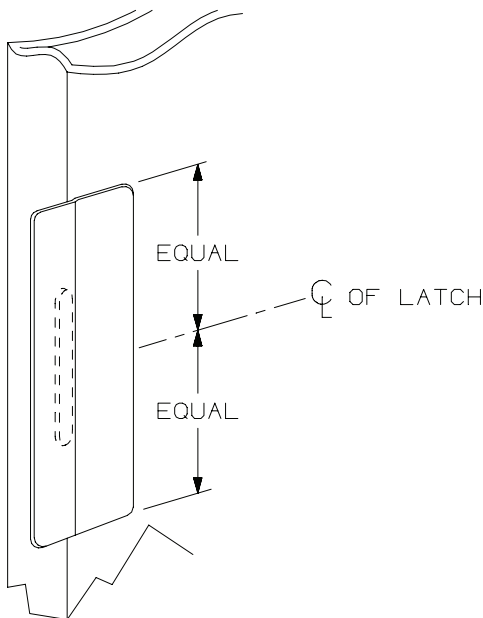


4.

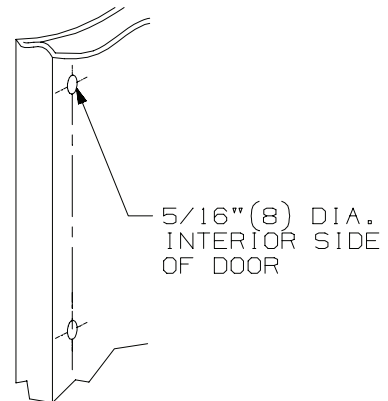

DRILL HOLE FOR LOCK GUARD (DRILL HOLES FROM EACH SIDE TO ENSURE PROPER ALIGNMENT.)


5.

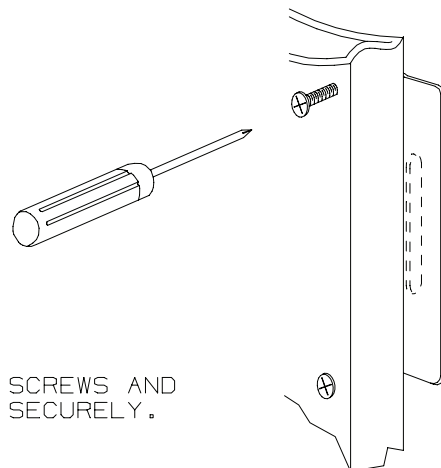

	QTY	SCREW DETAILS
LG10	2	1/4-20 X 1 1/4" OPHMS
LG11	2	1/4-20 X 1 1/4" OPHMS
LG12	2	1/4-20 X 1 1/4" OPHMS
LG13	2	1/4-20 X 1 1/4" OPHMS
LG14	4	1/4-20 X 1 1/4" OPHMS


NOTE: DIMENSIONS IN () ARE MILLIMETERS.

LG10
OVERALL SIZE 2 1/2" X 9 1/2"

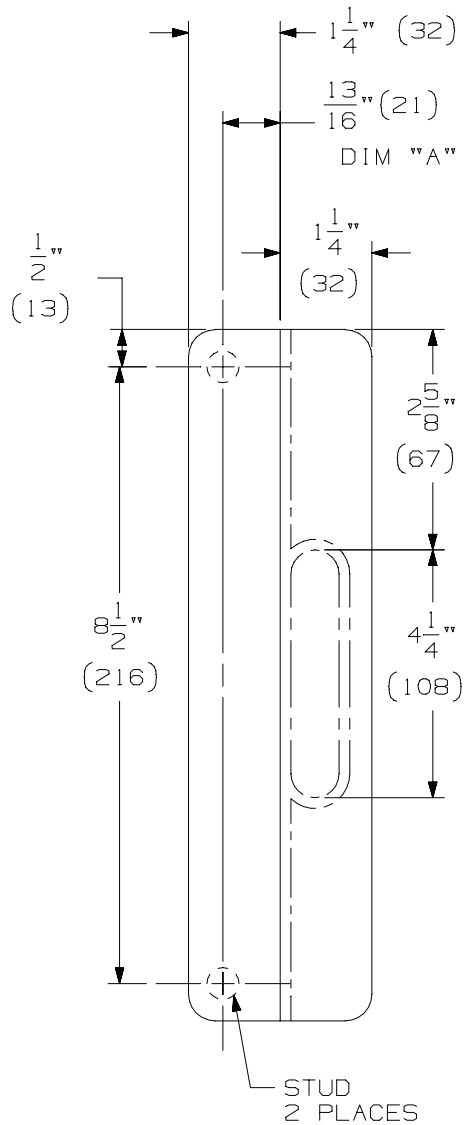

STANDARD LINE - FOR
ESCUTCHEONS 2 3/4" (70)
WIDE AND LESS


LG11
OVERALL SIZE 3" X 9 1/2"

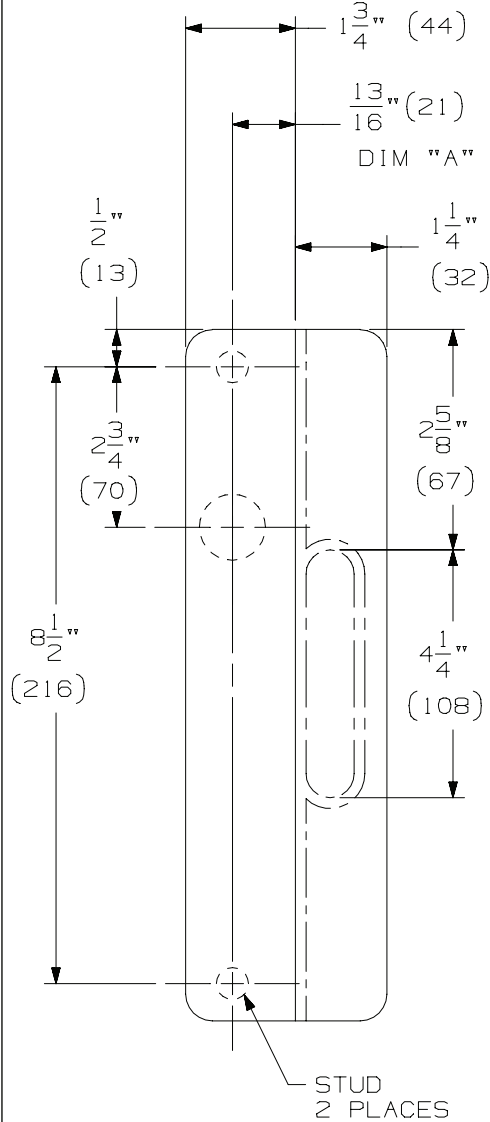

RH SHOWN
LH OPPOSITE


FOR NARROW SITE ALUMINUM
DOORS AVAILABLE WITHOUT HOLE

LG12 & LG 14
LG12 OVERALL SIZE 1 1/2" X 9 1/2"
LG14 OVERALL SIZE 2 9/16" X 9 1/2"

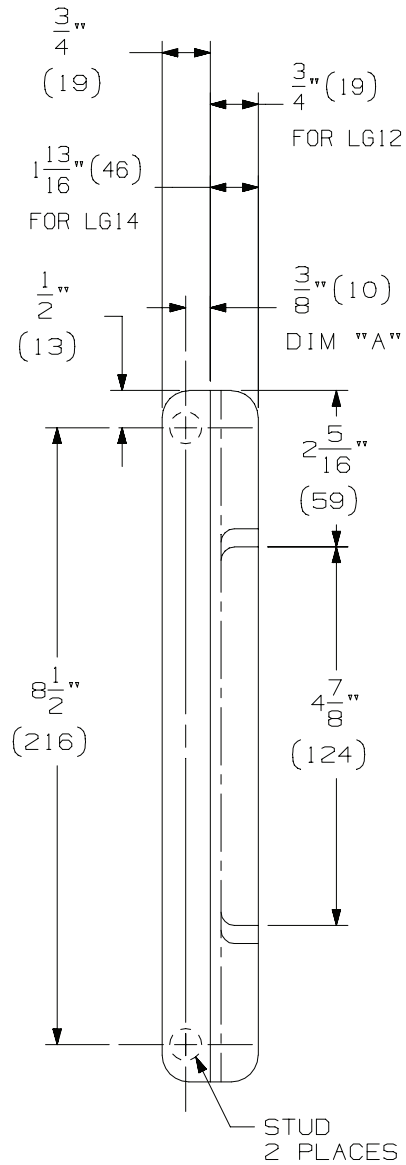

FOR USE WITH WIDE
ESCUTCHEONS 3 1/2" (89)
WIDE OR LESS

LG13
OVERALL SIZE 1 1/2" X 7"

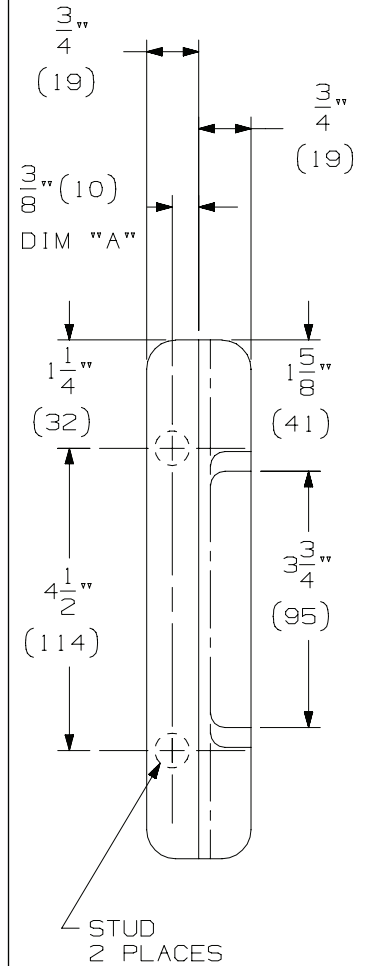

CYLINDER LOCK
APPLICATIONS