



ROLLER LATCH

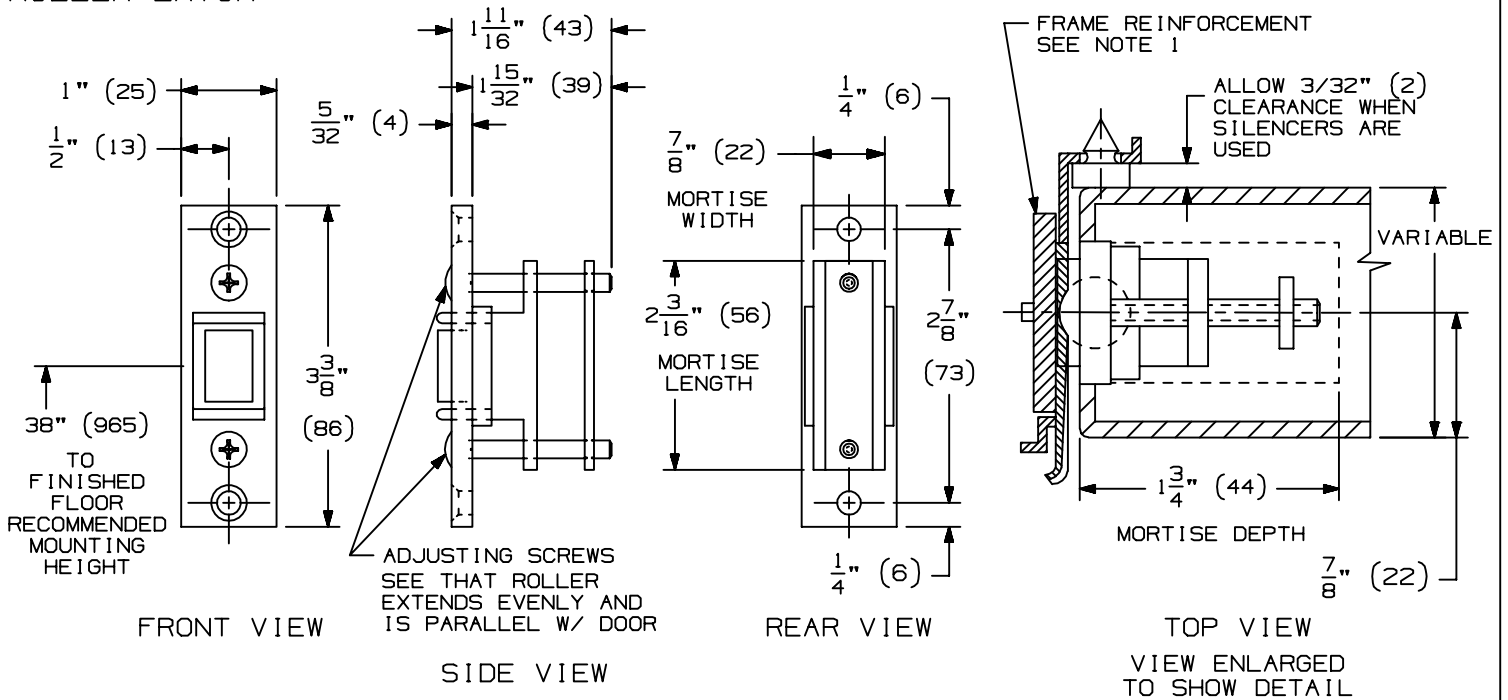

STRIKES

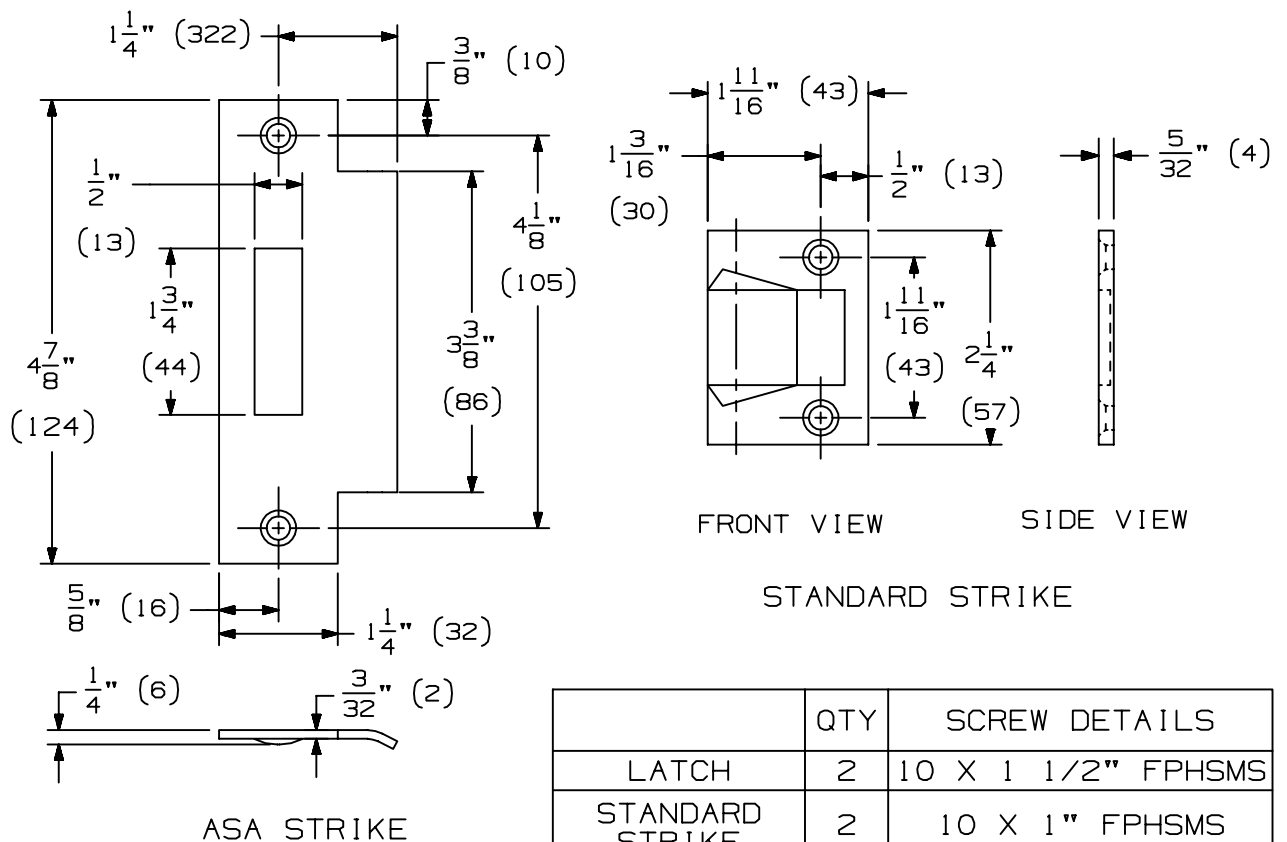

	QTY	SCREW DETAILS
LATCH	2	10 X 1 1/2" FPHSMS
STANDARD STRIKE	2	10 X 1" FPHSMS
ASA STRIKE	2	12-24 X 1" FPHMS

NOTES:

- HOLLOW METAL DOORS & FRAMES SHOULD BE PROPERLY REINFORCED WITH A $\frac{3}{16}$ " (5) MINIMUM THICKNESS PLATE.

IVES

RL30 ROLLER LATCH
 INSTALLATION TEMPLATE

IR Ingersoll Rand
 Security Technologies

NOTE: DIMENSIONS IN () ARE MILLIMETERS.

TEMPLATE NUMBER: INST-RL30-A

DATE:
 08-19-13