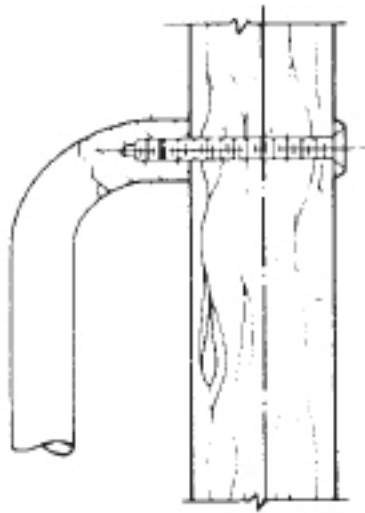
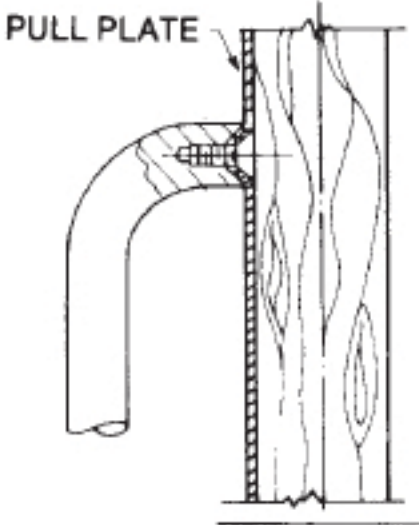
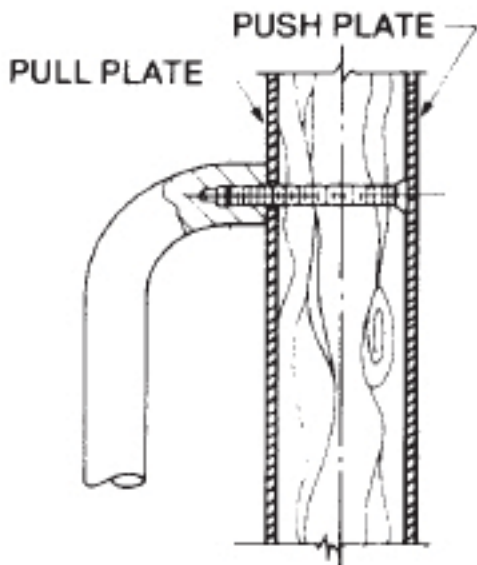
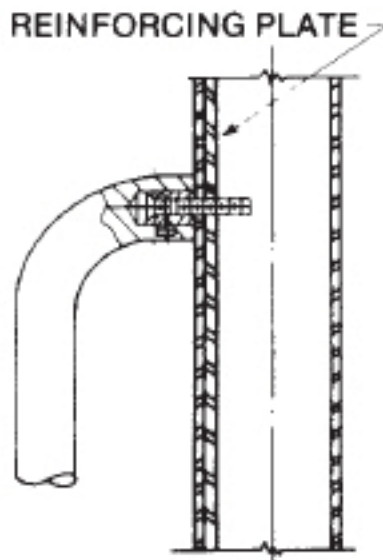
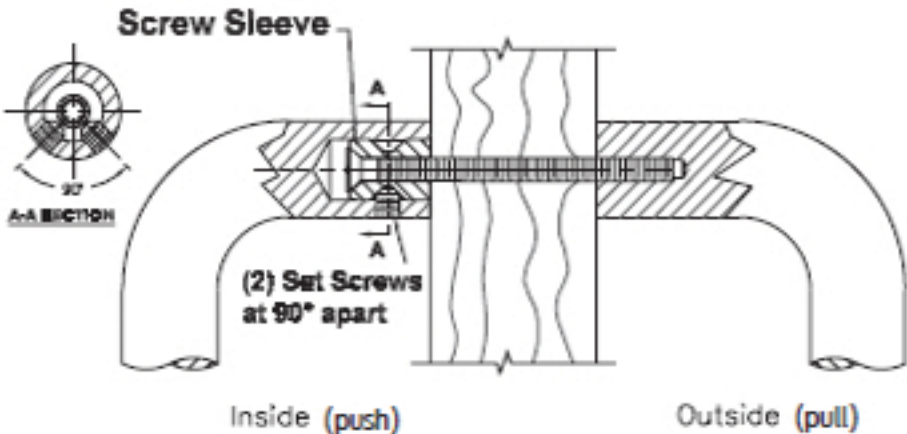


Mounting

- All mounting hardware is for standard 1-3/4" door.
- Consult Customer Service if other than standard.

Type Standard Mount  Standard Mounting • (2) 3/8-16 x 2-1/4" brass, flat head machine screws; plate to match. • (2) 3/8-16 countersunk washers; plated to match Note: 8102HD and 8105 have (2) 5/16-18 x 2-1/2" machine screws -Options: (2) 5/16 countersunk washers	Type G Mount  Concealed Pull Plate Mounting Available only for 8302, 8303, 8311 Pull Plates. • (2) 3/8-16 x 5/8" steel flat head machine screws; zinc plated. Pull mounts directly onto plate. Plate is attached to door by 6 screws. Note: 8302 has (2) 5/16-19 x 5/8" steel flathead zinc plated screws
Type F Mount  Wood Doors Concealed Pull Mounting With Push Plate • (2) 2-1/4" steel flat head machine screws; zinc plated. Available only for 8102HD, 8103HD, 8105, 8111, 8302, 8303, 8305 and 8311. Plate on opposite side of door must be ordered separately. Note: 8102HD, 8302 will have 5/16-18 8105, 8111, 8305, 8311 will have 1/4-20 8103HD, 8303 will have 3/8-16"	Type H-I-L Mount  Reinforced Hollow Metal Door Concealed Pull Mounting Available only for 8102, 8103, 810EZ or wood door pulls, 8302, 8303 pull plates and 9264, 9265, 9266 and 9267 long door pulls. • (2) Steel screw sleeves; zinc plated. • (2) Steel countersunk trim head machine screw; zinc plated for reinforced metal door. • (2) Steel countersunk trim head steel metal screw; zinc plated for wood doors. Note: 8102HD and 8302 will have 5/16-18" 8103HD, 8103EZHD, 8303 will have 3/8-16
Type J/N Mount  Back to Back "Two-Anchor" Wood or Metal Door Available only for 8103EZHD, 8190HD, 9100HD push/pull combinations and 9264, 9265, 9266 and 9267 long door pulls. • (2) 3/8-16 x 2-3/4" steel countersunk trim head machine screws with (4) set screws for maximum anchoring force. • (2) Steel screw sleeves; zinc plated.	