



FIRE-RATED FLUSH ACCESS PANELS: FD Series

FD: Standard Panel (Wall or Ceiling):

Frame & Trim: 16 gauge steel with a 1" flange. Welded-on masonry anchor.

Door: 2" thick, insulated 20 gauge steel with continuous hinge.

Finish: Gray powder coat primer.

Latch: Universal turn ring and key lock (U).

FDSS: Stainless Steel (Wall or Ceiling):

Frame: 16 gauge stainless steel with 1" wall flange. Welded on masonry anchor.

Door: 2" thick, insulated 20 gauge stainless steel with continuous hinge.

Finish: 304 stainless steel - #4 satin finish.

Latch: Universal turn ring and key lock (U).

HGFD: Heavy Gauge and Security (Wall):

Frame: 14 gauge steel with 1" wall flange. Welded-on masonry anchor.

Door: 2" thick, insulated 14 gauge steel with continuous hinge.

Finish: Gray powder coat primer.

Latch: Universal turn ring and key lock (U).

Options: Custom Colors, Galvanized Finish, Mortise Slam Lock Prep (UM) or Mortise Slam Lock Installed (UMI). **See Optional Colors on Page 12.** See also non-rated security panels on page 8.



MODEL FD

Fire-Rating of FD, FDSS & HGFD:

Wall Installation: 1-1/2 hour UL "B" label in a 2 hour fire barrier.

File # R13067-1. Maximum size 48" x 48"

Ceiling Installation: Warnock Hersey listed for floor or ceiling installations with 3 hour non-combustible rating or 1 hour combustible rating.

File # WHI-495-PSH-0163. Maximum size 24" x 36"

CSFM: This product has been approved by the California State Fire Marshall (CSFM) pursuant to Section 13144.1 of the California Health and Safety Code. See CSFM Listing No 3330-1223:101 for allowable values and/or conditions for use concerning material presented in this document. It is subject reexamination, revision and possible cancellation.




UNIVERSAL TURN RING
AND KEY LOCK INCLUDED




All Fire-Rated Models Shown in Chart at Left:

Most Sizes of Model FD In Stock at One of Our 7 US Warehouses for Next Day Shipping - See Stock List.

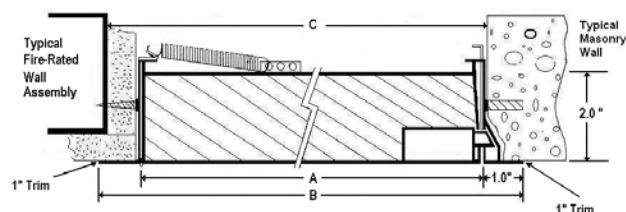

Wall Installation - FD-FDSS-HGFD Top View

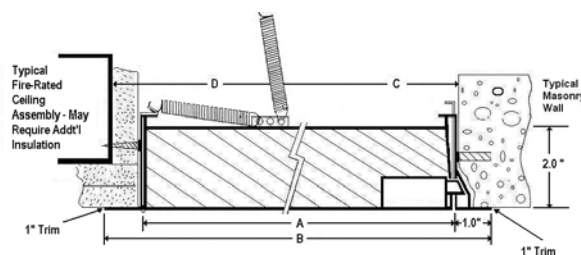

Ceiling Installation - FD-FDSS-HGFD Side View

Order Format	Style Code	Width	Height	Latch (U Standard, UM & UMI Optional)	Optional Color Code FD & HGFD (Pg 12)
For Fire-Rated Models:					
Example: HGFD-1212UMI-W					