



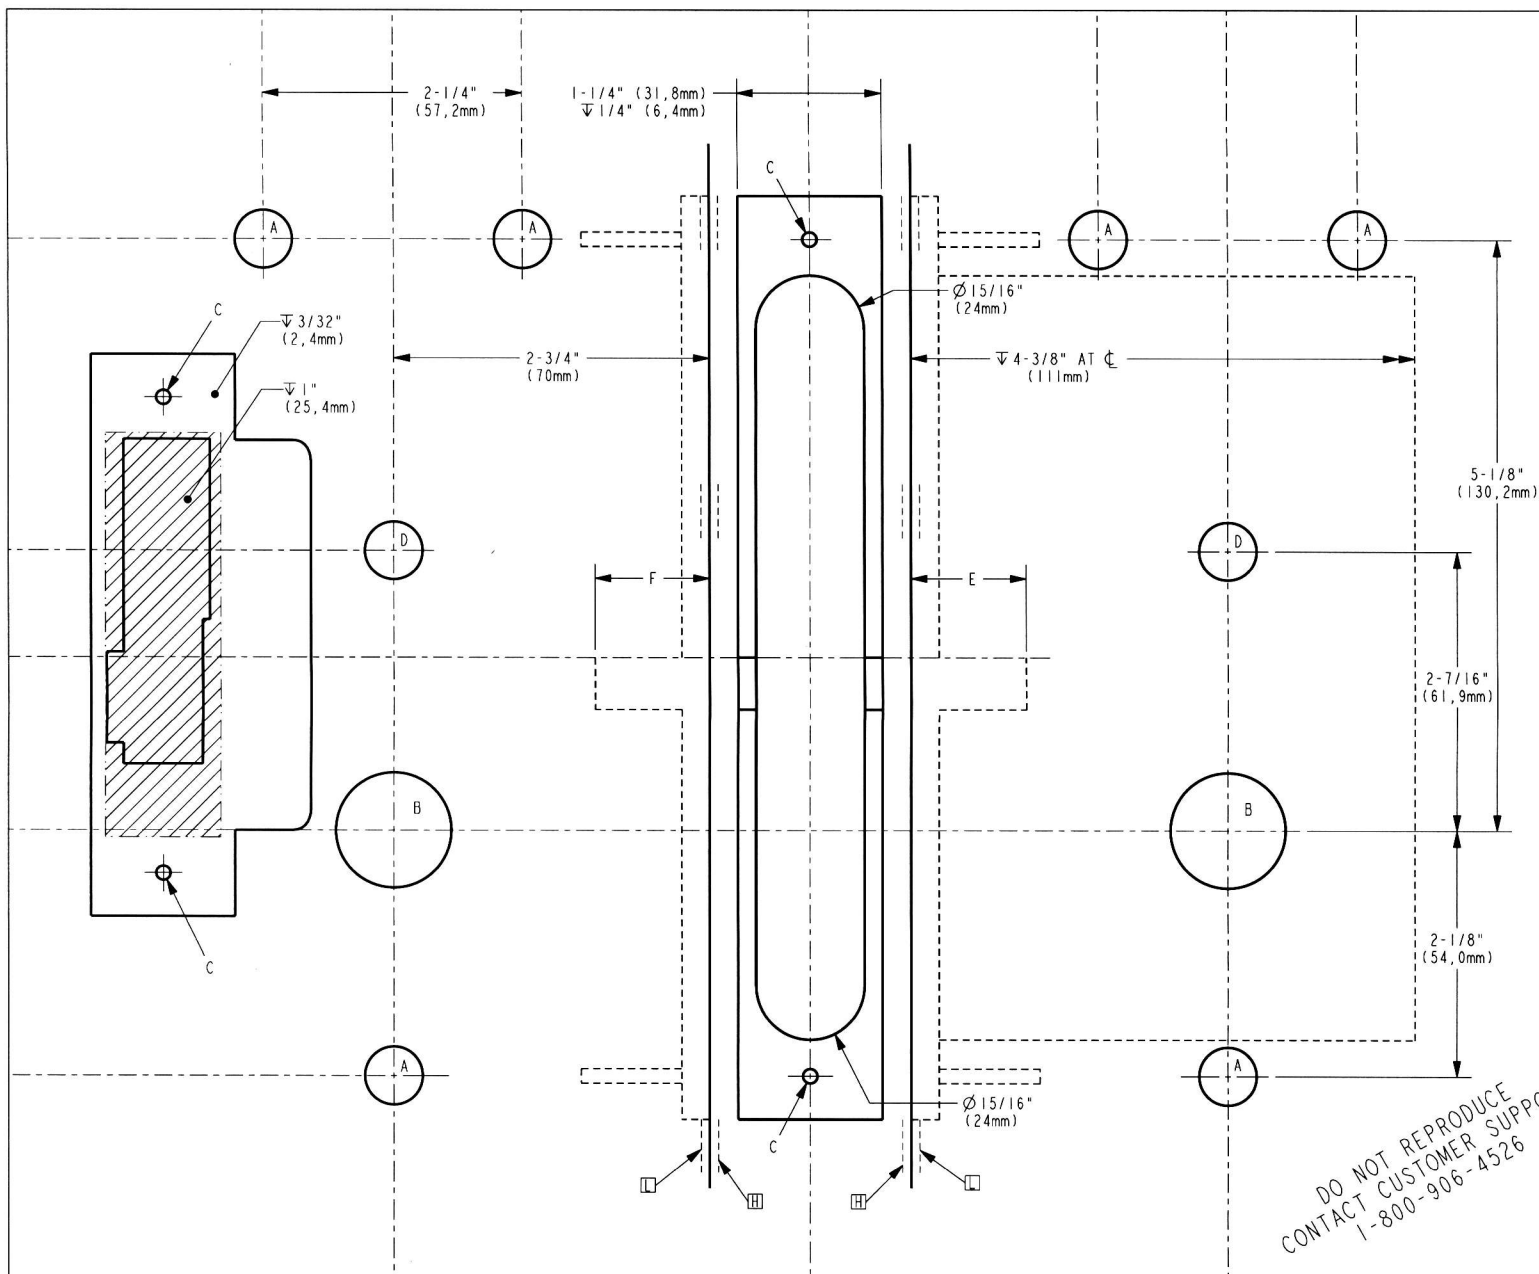

- NOTES:
- 1- FOR DIMENSIONS AND TOLERANCES REFER TO: DOOR PREPARATION DRAWING #1P-510151
 - 2- HIGH AND LOW BEVEL EDGE, H AND L SHOWN FOR DOOR WITH 3° BEVEL ANGLE
 - 4- SYMBOLS:
 - ∇ DEEP
 - CL CENTER LINE OF DOOR
 - $\varnothing$ DIAMETER
 - ∇ NOT TO SCALE

HOLE ID	DIM INCH	DIM mm	COMMENTS
A	$\varnothing 1/2$	$\varnothing 12,5$	-
B	$\varnothing 1$	$\varnothing 25,5$	-
C	$\varnothing 1/8$	$\varnothing 3,0$	$\nabla 7/8"$ (22mm)
D	$\varnothing 1/2$	$\varnothing 12,5$	ONLY IF THUMB TURN
E	$\nabla 1$	$\nabla 25,4$	ONLY IF RH OR LHR
F	$\nabla 1$	$\nabla 25,4$	ONLY IF LH OR RHR

UNLESS OTHERWISE NOTED, DRILL HALF DOOR THICKNESS ON BOTH SIDES.

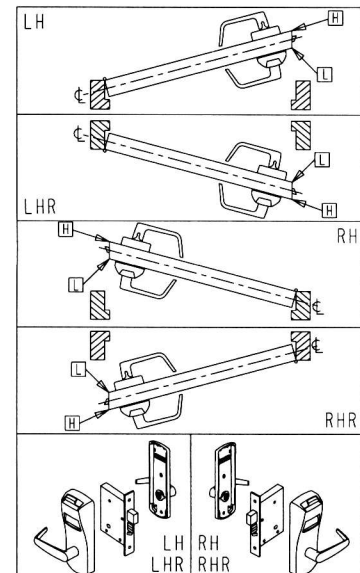

DRILLING TEMPLATE 660, 760, 770, 790 AND 76M LOCK SERIES

AMERICAN MORTISE - 1 1/4" FRONT PLATE
 LEFT HAND (LH) - LEFT HAND REVERSE (LHR)
 RIGHT HAND (RH) - RIGHT HAND REVERSE (RHR)
 BACKSET OF 2-3/4" (70mm)

KABA 7301, Decarie Boul
 Montreal, QC Canada
 14P 261
 www.kaba-ilco.com

SHEET	DATE	UNE VERSION FRANCAISE DE CE DOCUMENT EST DISPONIBLE SUR DEMANDE.	
1 OF 1	240C07 ECN 12610		DT-510151 REV-7

DO NOT REPRODUCE
 CONTACT CUSTOMER SUPPORT
 1-800-906-4526