

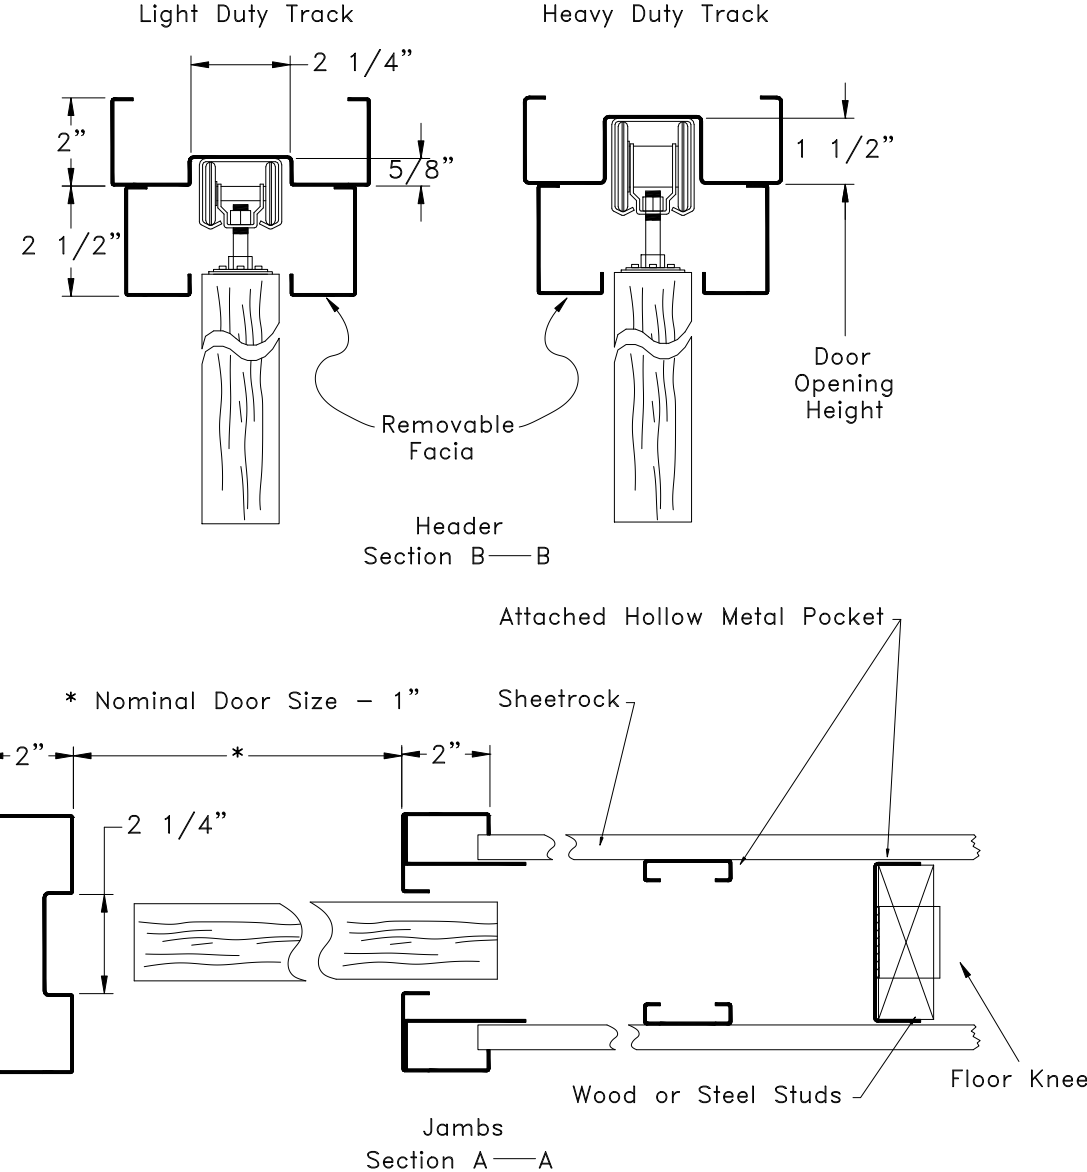
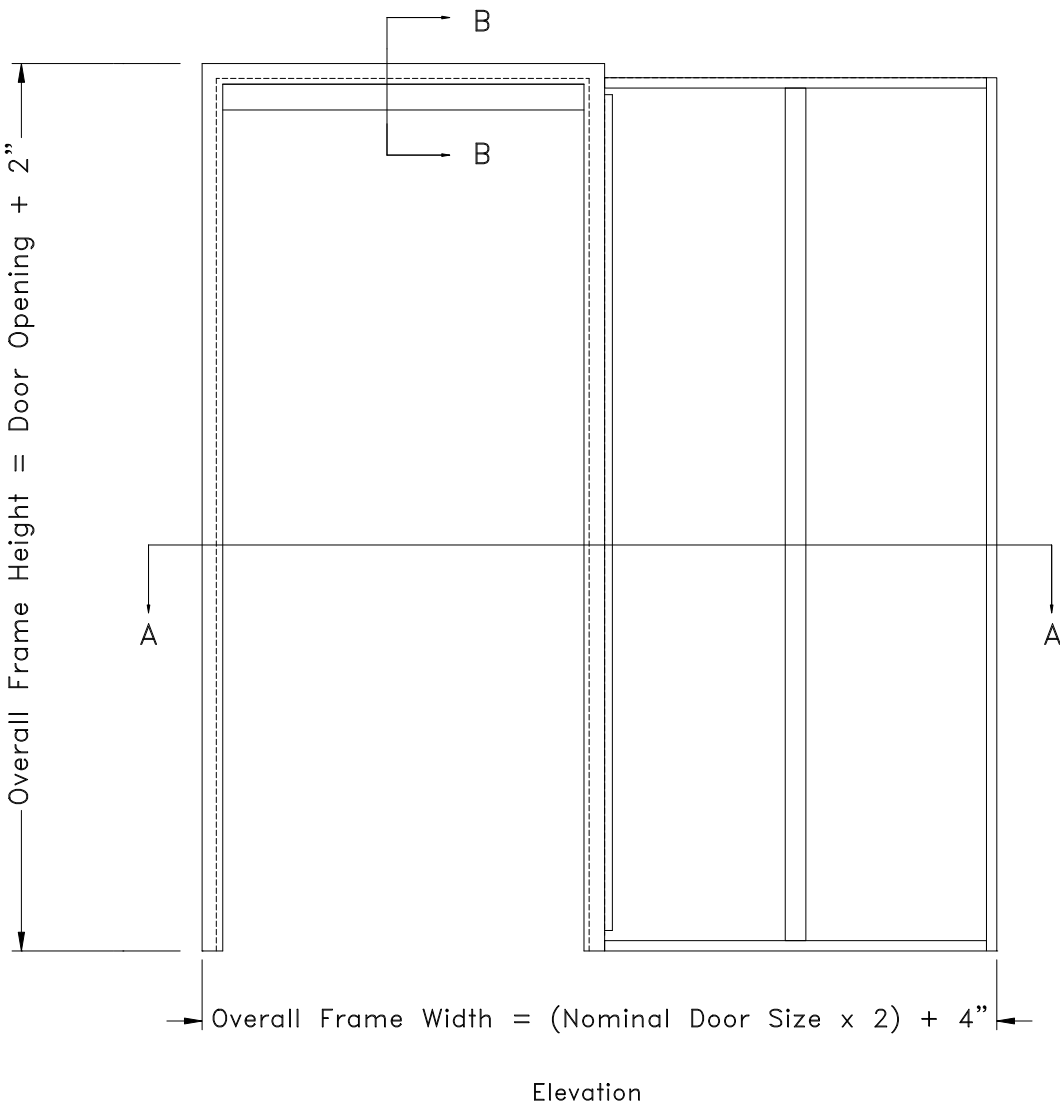
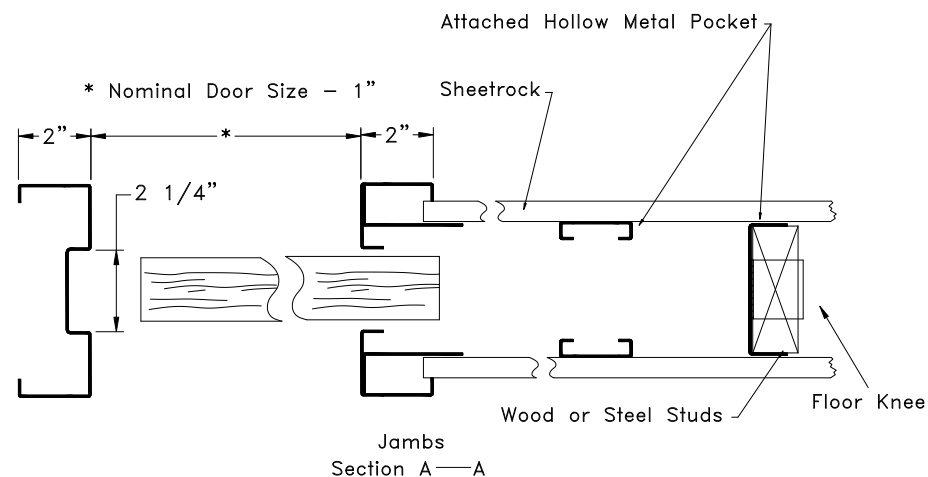


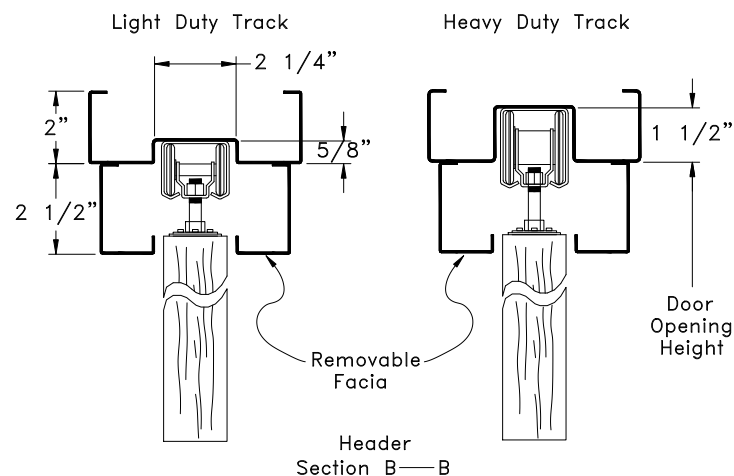


NOTES:

- Minimum Jamb Width is 5 1/2"
- 16 Gauge, CRS, Standard
- For Single or Double Sliding Pocket Doors
- Attached Hollow Metal Pocket(s) Supplied With Frame
- Track By Others

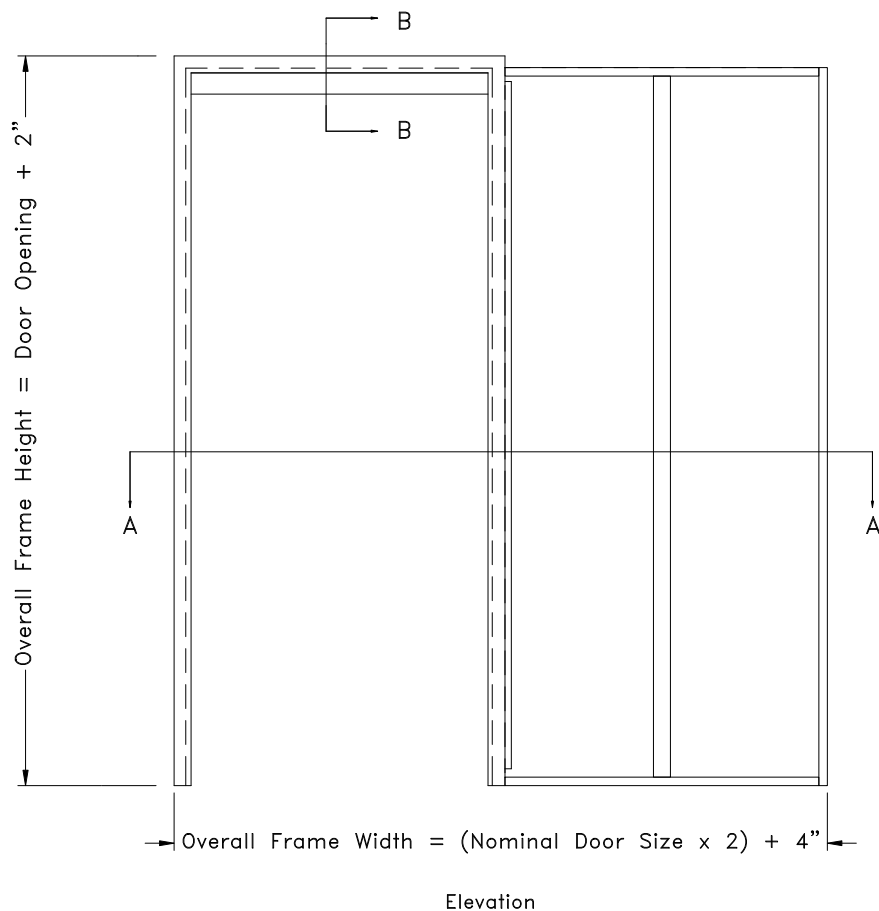

NOTES:

- Minimum Jamb Width is 5 1/2"
- 16 Gauge, CRS, Standard
- For Single or Double Sliding Pocket Doors
- Attached Hollow Metal Pocket(s) Supplied With Frame
- Track By Others



Karpen Steel Custom Doors & Frames

181 Reems Creek Rd
Weaverville NC 28787
www.karpensteel.com

Tel: 828-645-4821
Fax: 800-851-2131

Revised by:
C Rogers

Customer name:

Job name:

Description: Pocket Frame with
Attached Pocket

File name:

CUFK0003

REV

Revision Date:

16OCT07

Sheet