

Specifications:

Input:

- Input voltage - 120 VAC
- Input fuse 2 amp fuse @ 120 VAC

Output:

- Output voltage - 24 VDC regulated @ 3.2 A
- Temperature range - 13 Degree to 158 Degree F

Additional Features:

- UL 60950-1, TUV EN60950-1
- Wire run up to 200' with 18/2 wire
- Dual input / output
- (3) Year "No hassle" warranty

Battery Backup:

- Standard with power supply
- Required to insure fail secure operation

Fire Alarm:


- fire link standard

Exit Device Application:

- (2) 1686 exit devices per NP1 power supply
- (2) 1786 exit devices per NP1 power supply

Technical Support Contact:

- Contact AHT (Advanced Hardware Technologies) for current safety agency listing
- Contact # 866-738-4916

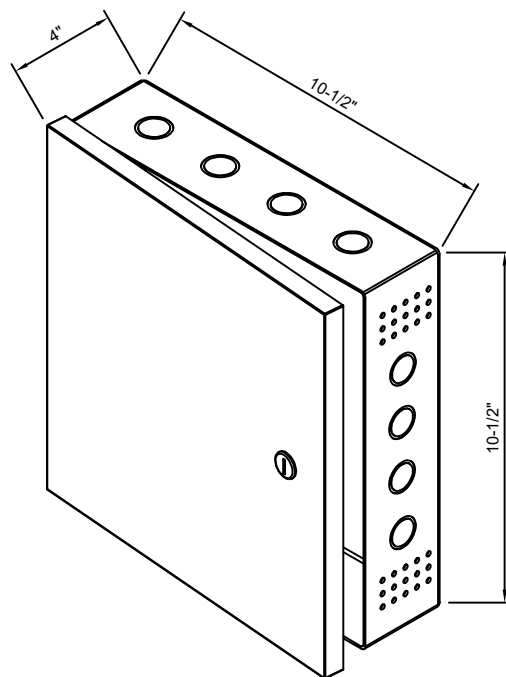

NOTE:
A PART WEIGHT: 6.2 LBS.


NOTE:
THIS POWER SUPPLY WILL BE USED EXCLUSIVELY WITH THE MEL (MOTOR ELECTRIC) 1686 AND 1786 EXIT DEVICES ONLY. POWER SUPPLIES BY OTHERS WILL NOT BE PERMITTED AND ARE SUBJECT TO WARRANTY BEING VOID.

NOTES:
(UNLESS OTHERWISE NOTED)
1. REMOVE BURRS AND SHARP EDGES
2. FRACTIONAL DIMENSIONS ±1/32
3. DECIMAL DIMENSIONS ±0.010
4. ANGULARITY ±ONE DEGREE

050419

A

CONFIDENTIAL AND PROPRIETARY
INFORMATION KAWNEER COMPANY INC.
THESE DRAWINGS ARE THE SOLE AND EXCLUSIVE PROPERTY OF KAWNEER AND CONTAIN SENSITIVE, PRIVILEGED OR CONFIDENTIAL INFORMATION WHICH MAY BE USED ONLY FOR ITS BENEFIT. THE DISCLOSURE OF THESE DRAWINGS TO UNAUTHORIZED PERSONS IS STRICTLY PROHIBITED. THIS DOCUMENT AND ALL COPIES MUST BE RETURNED UPON DEMAND.
© COPYRIGHT KAWNEER COMPANY, INC., 2018

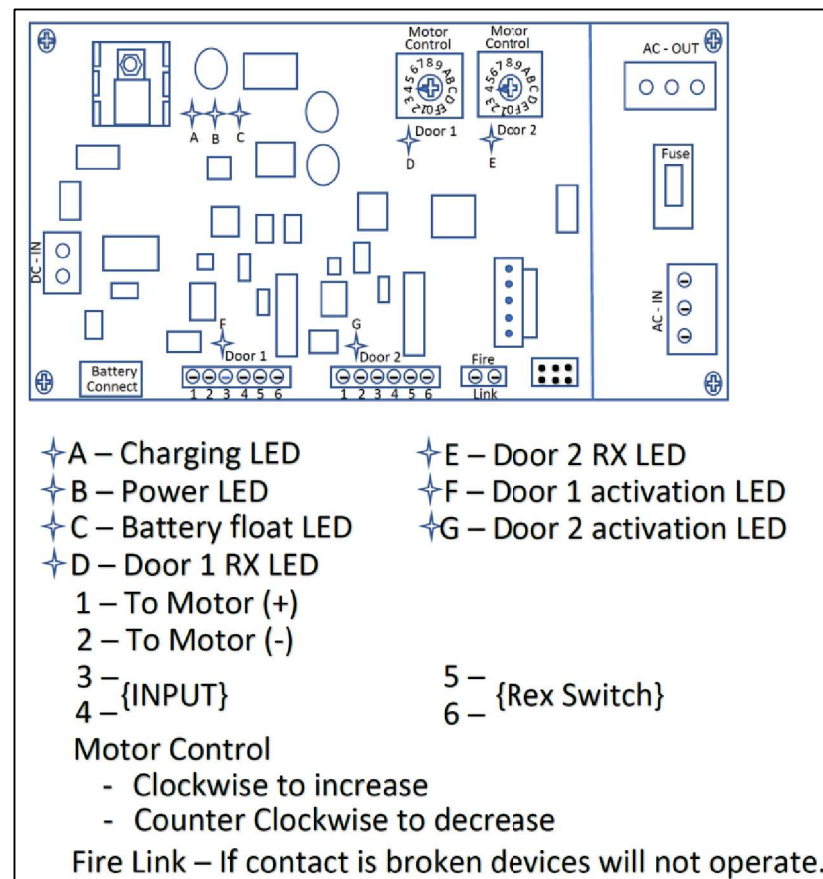

DRAWN:	MATERIAL AND FINISH	95378-108	A	ADDED PART WEIGHT	10/12/18
MRC		E.C. NO.	REV.	DESCRIPTION	DATE
DATE:		PART DESC.	NP1 SERIES POWER SUPPLY		
07/23/18		(30 CHRS)			
CHECK:		PDM PART NUMBER	050419		
BAP		(25 CHRS)			
APPRD:		FILE NAME	050419		
MSH					
SCALE:	Product Engineering & Development				
NTS					