



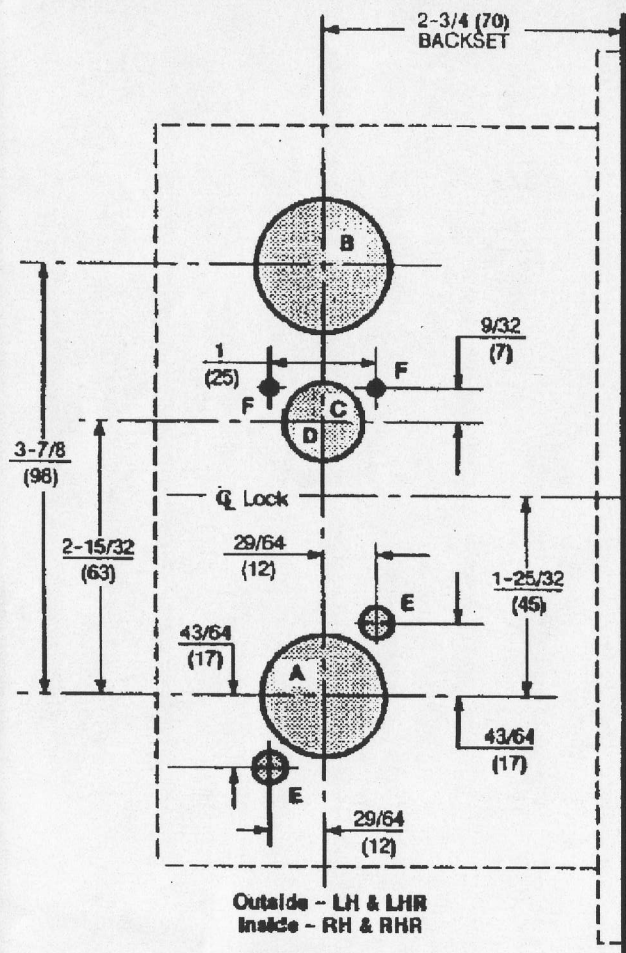

Hole Chart			
Hole	Size		Used For
	H.M. Door	Wood Door	
A	1-1/8 (29) Dia.	1-1/8 (29) Dia.	Knob
B	1-1/4 (32) Dia.	1-1/4 (32) Dia.	Cylinder
C	3/4 (19) Dia.	3/4 (19) Dia.	Thumbturn or Emergency Key
D	3/4 (19) Dia.	3/4 (19) Dia.	Hotel Indicator
E	5/16 (8) Dia.	5/16 (8) Dia.	Rose Thru Bolt
F	.116 (2.9) Dia. #32 Drill	1/16 (1.6) Dia.	Thumbturn Plate Attaching Screws

Lock Function			Notes in Door	
4600	8600	8700	Outside	Inside
4601	8601	8701 8770DT 8771DT 8772DT	A, E	A, E
4680 4681 4684	8680 8681 8684	8780 8781 8784 836A & B 838A & B		
4602	8602	8702	A, C, E, F	A, C, E, F
4605 4607 4608 4624	8605 8607 8608 8624	8705 8707 8708 8731	A, B, E	A, E
4690 4691	8690 8691	8790 8791	A, B*, E	A, B*, E
4660-2 4694-2 4695-2	8660-2 8694-2 8695-2	8717-2 8730-2 8760-2 8794-2 8795-2	A, B, E	A, B, E
4620	8620	8720 8727	A, B, D, E	A, C, E, F
4622 4632	8622 8632 8647	8722 8732 8747	A, B, E	A, C, E, F
4660 4667	8660 8667	8760 8767		
		8728	NONE	A, E
	8633		B ONLY	A, E
	8634 8634-2		B ONLY	A, B, E
		8713ST 8715	B ONLY	C, F
		8713ST-2	B ONLY	B, C, F
		8714	B ONLY	NONE
	8633-2	8714-2	B ONLY	B ONLY

* Lock can be mounted with cylinder outside or inside. Check for proper application.

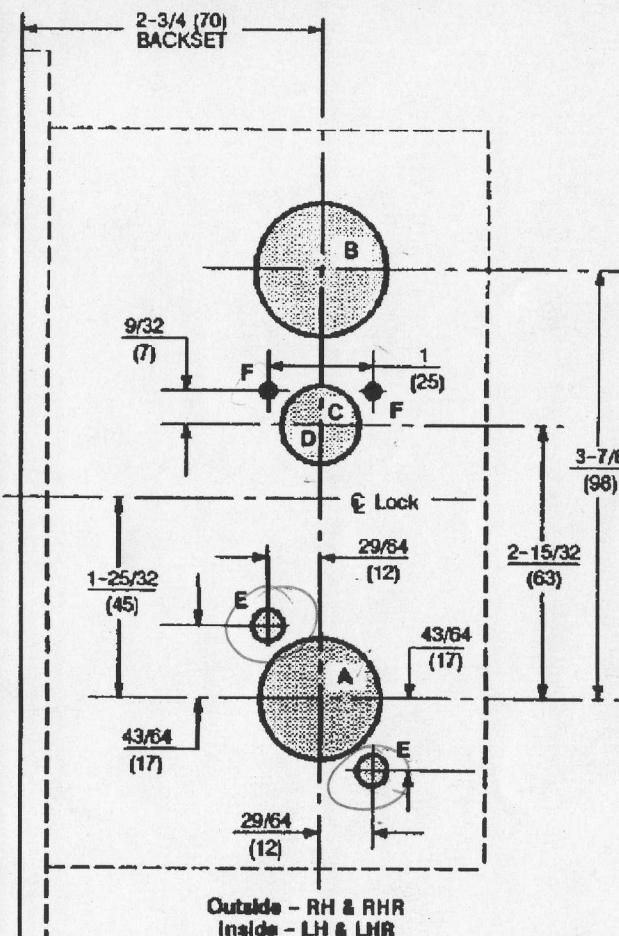

Notes:

1. All dimension given in inches (mm).
2. Do Not Scale.
3. Revised (4-92)
Lock function chart updated. No dimensional changes.

4600, 8600 & 8700 Series Mortise Locks
Wood and H.M. Door Preparation
Thru Bolted Sectional Trim

Yale

Yale Security Inc.

P.O. BOX 25286, CHARLOTTE, NC 28226-0010

TEMPLATE NUMBER

7086-1001

DATE

11-97

K-BX MUR 1