



MP, HT & DC SERIES



WC 2½ & WC 6L



PW 2½ & WM 2½



CD SERIES

MP SERIES Multi-Purpose Dry Chemical

These units contain specially fluidized and siliconized mono ammonium phosphate powder which smothers and breaks the chain reaction on **Class B** fires, fuses and insulates **Class A** fires, and as a non-conductor of electricity, is effective on **Class C** fires involving live electrical equipment.

DC SERIES Regular Dry Chemical

These units contain specially siliconized sodium bicarbonate powder with free flowing and non-caking additives, suitable for fire in flammable liquids, and energized electrical equipment. **NOTE:** Since, as of July 1, 1998, all new extinguishers installed in restaurant kitchens must be **K Class** rated, the DC Series no longer is recommended for use in kitchen areas.

All multi-purpose, regular dry chemical units feature: Heavy duty DOT steel cylinders, rugged metal valves and siphon tubes, replaceable molded valve stem seals, pull pin-upright squeeze grip operation, approved to -65°F, non-toxic and pressure gauges.

WC SERIES Wet Chemical

Wet Chemical units are designed specifically for kitchen grease fire hazards and meet the new **K Class** listing now required for all extinguishers installed in restaurant kitchens. They contain a special potassium acetate based, low PH agent, which leaves no chemical residue to clean up. The spray applicator keeps the operator at a safe distance from the fire (shipped charged).

PW SERIES Pressurized Water

This unit is ideally suited for all industrial and commercial applications, where easy to use, positive on-off operation is important. Water is used as the extinguishing agent, making it highly effective on deep seated **Class A** fires (shipped empty).

WM SERIES Water Mist

This unit is designed for use wherever there is a **Class A** hazard near electrical equipment and the environment is of paramount concern. The extinguishing agent is de-ionized water, and the wand provides greatest operator safety. There is no risk of electrical conductivity or thermal or static shock. Ideal for use in health care, data processing, telecommunication, MRI and clean room facilities (shipped empty).


CD SERIES Carbon Dioxide

These units contain liquid carbon dioxide under pressure. It is discharged as a white cloud of "snow", which effectively smothers a fire. Carbon dioxide is a clean, non-conductor of electricity for **Class B** and **C** fires. Absolutely rust-free aluminum cylinders.


HT SERIES Halotron I

Halotron I is an EPA approved clean agent which discharges as a rapidly evaporating liquid, leaving no residue. It effectively extinguishes **Class A, B** and **C** fires and is intended for use in areas formerly protected by Halon 1211.

Standard Brackets*

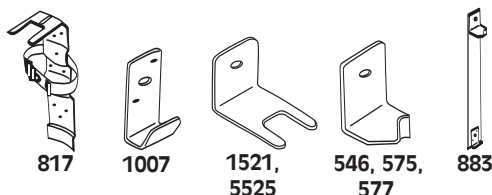

Optional Brackets*

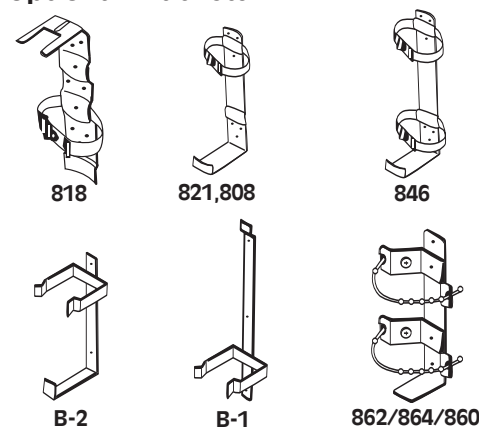

* **NOTE:** Standard brackets are included with all extinguishers at no additional cost. If specified, optional brackets are only available at additional cost. All the standard and optional brackets are designed to accommodate Larsen's extinguishers. While most comparably sized extinguishers usually will function with the brackets at right, Larsen's cannot assume responsibility for variations in cylinder dimensions among various extinguisher suppliers.

Model Number	Nominal Capacity	Shipping Weight	Cylinder Diameter	Overall Height	Overall Width	UL Rating	Standard Bracket*	Optional Bracket*
MP2½	2½ lbs.	5½ lbs.	3 in.	15½ in.	5½ in.	1A-10B:C	817	860
MP5	5 lbs.	9½ lbs.	4½ in.	15½ in.	7½ in.	2A-10B:C	1521	B-2, 818, 821, 860
MP5-A	5 lbs.	9½ lbs.	4½ in.	15½ in.	7½ in.	3A-40B:C	1521	821, 860, 818
MP6	6 lbs.	12½ lbs.	5 in.	16 in.	7½ in.	3A-40B:C	5525	808, 862
MP10	10 lbs.	18 lbs.	5 in.	20 in.	7½ in.	4A-80B:C	546	B-2, 846, 862
MP20	20 lbs.	38 lbs.	7 in.	23¾ in.	10½ in.	20A-120B:C	577	864
DC5	5½ lbs.	9½ lbs.	4½ in.	15½ in.	7½ in.	40B:C	1521	B2, 818, 821, 860
DC6	6 lbs.	13 lbs.	5 in.	16½ in.	8½ in.	40B:C	546	808, 862
DC10	10 lbs.	18 lbs.	5 in.	20 in.	7½ in.	60B:C	546	B-2, 846, 862
DC20	20 lbs.	38 lbs.	7 in.	23¾ in.	10½ in.	120B:C	577	864
WC-6L	6 liters	23 lbs.	7 in.	25 in.	9 in.	2A:K	1007	B1
WC2½	2½ gal.	34 lbs.	7 in.	24½ in.	9 in.	2A:K	1007	864
PW2½	2½ gal.	7½ lbs.	7 in.	24½ in.	9 in.	2A	1007	B1, 864
WM2½	2½ gal.	9 lbs.	7 in.	26 in.	11 in.	2A:C	1007	864
CD5	5 lbs.	14 lbs.	5½ in.	17¾ in.	8½ in.	5-B:C	546	862
CD10	10 lbs.	28½ lbs.	7 in.	24 in.	12 in.	10-B:C	575	864
CD15	15 lbs.	37½ lbs.	7 in.	30 in.	12 in.	10-B:C	575	864
CD20	20 lbs.	50½ lbs.	8 in.	30 in.	13 in.	10-B:C	577	864
HT2½	2½ lbs.	5½ lbs.	3 in.	15½ in.	5½ in.	2B:C	817	860
HT5	5 lbs.	9½ lbs.	4½ in.	15½ in.	5½ in.	5B:C	818	860
HT11	11 lbs.	22½ lbs.	6 in.	21 in.	9½ in.	1A:10B:C	883	862
HT15½	15½ lbs.	27½ lbs.	6 in.	21 in.	9½ in.	2A:10B:C	883	862



CLASS A FIRES

Paper, wood, cloth, etc. where quenching by water or insulating by general purpose dry chemical is effective.



CLASS B FIRES

Burning liquids (gasoline, oils, cooking fats, etc.) where smothering action is required.



CLASS C FIRES

Fire in live electrical equipment (motors, switches, appliances, etc.) where a non-conductive extinguishing agent is required.



CLASS K FIRES

Cooking media.