



OVERHEAD CONCEALED CLOSERS

Single Acting, for Doors Hung on Butts


Nos. **202**
204
206

The basic overhead concealed closer. Mechanism installed in head frame and top of door. Power transmitted by a lever arm which disappears into recess in door stop upon closing. Used with exterior or interior doors of wood or metal $1\frac{3}{4}$ " thick or more. Easily regulated without removing any part. Door opening of 180° possible if door and jamb properly arranged. Hydraulic

back-check protects walls, furniture, etc. Door stop required if traffic tends to "ride" the door (see p. 3, sec. 9).

The hold-open feature (optional) may be set to hold at one of following door positions: 85°, 90°, 100° or 110°.

Exposed parts primed for painting or available in choice of LCN finishes, page 43. In ordering, please note "How to Order," page 3.

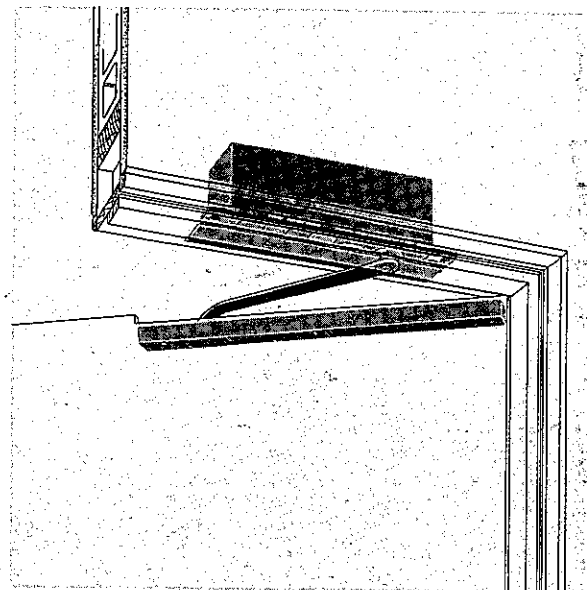

Phantom drawing shows LCN series 200 closer, designed for doors hung on butts. It is entirely independent of the door hanging. Door and/or frame may be wood or metal; if metal, preparation is done by fabricator.

TYPES OF DOORS AND MAXIMUM WIDTHS for which these closers are designed (wood or metal)			CLOSER NO.		Shipping Weight Approximate
Entrance and Vestibule		Interior	With REGULAR Arm	With HOLD-OPEN Arm	
Inswinging	OUTswinging				
—	—	3'0"	202	202-H	26 lbs
2'6"	2'10"	3'6"	204	204-H	26 lbs.
3'2"	3'6"	4'0"	206	206-H	31 lbs.

