



OVERHEAD CONCEALED CLOSERS

Single Acting, for Doors Hung on Offset Pivots

Nos. **202 OP**
204 OP
206 OP

The basic overhead concealed closer as adapted to *offset pivot* hanging of door, which is desirable to clear certain types of jamb. Closer may be used with wood or metal doors having top members at least $1\frac{3}{4}$ " thick.


Top and bottom ball-bearing offset pivots are furnished with closer. LCN intermediate pivot, at added cost, strongly recommended for doors over 7'0" high or for heavy metal doors.

Door may open 130° , jamb permit-

ting. Hydraulic back-check protects walls, etc. A door stop is required if traffic tends to "ride" the door (see p. 3, sec. 9). Closer may be removed without taking door down.

A hold-open feature is available; may be set to hold at one of following positions: 85° , 90° , 100° or 110° .

Exposed parts in prime coat or choice of LCN finishes, page 43. In ordering please note "How to Order," page 3, and give full information.

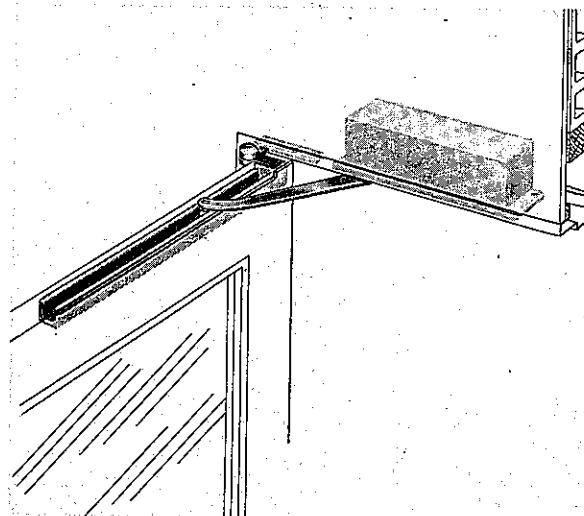

Phantom drawing shows the LCN series 200 OP closer as used with doors hung on offset pivots, a way of clearing certain types of jamb. Door may be of wood, metal or glass having top member at least $1\frac{3}{4}$ " thick.

TYPES OF DOORS AND MAXIMUM WIDTHS for which these closers are designed (wood or metal)			CLOSER NO.		Shipping Weight Approximate
Entrance and Vestibule		Interior	With REGULAR Arm	With HOLD-OPEN Arm	
INswinging	OUTswinging				
—	—	3'0"	202 OP	202 OP-H	29 lbs.
2'6"	2'10"	3'6"	204 OP	204 OP-H	29 lbs.
3'2"	3'6"	4'0"	206 OP	206 OP-H	34 lbs.

