


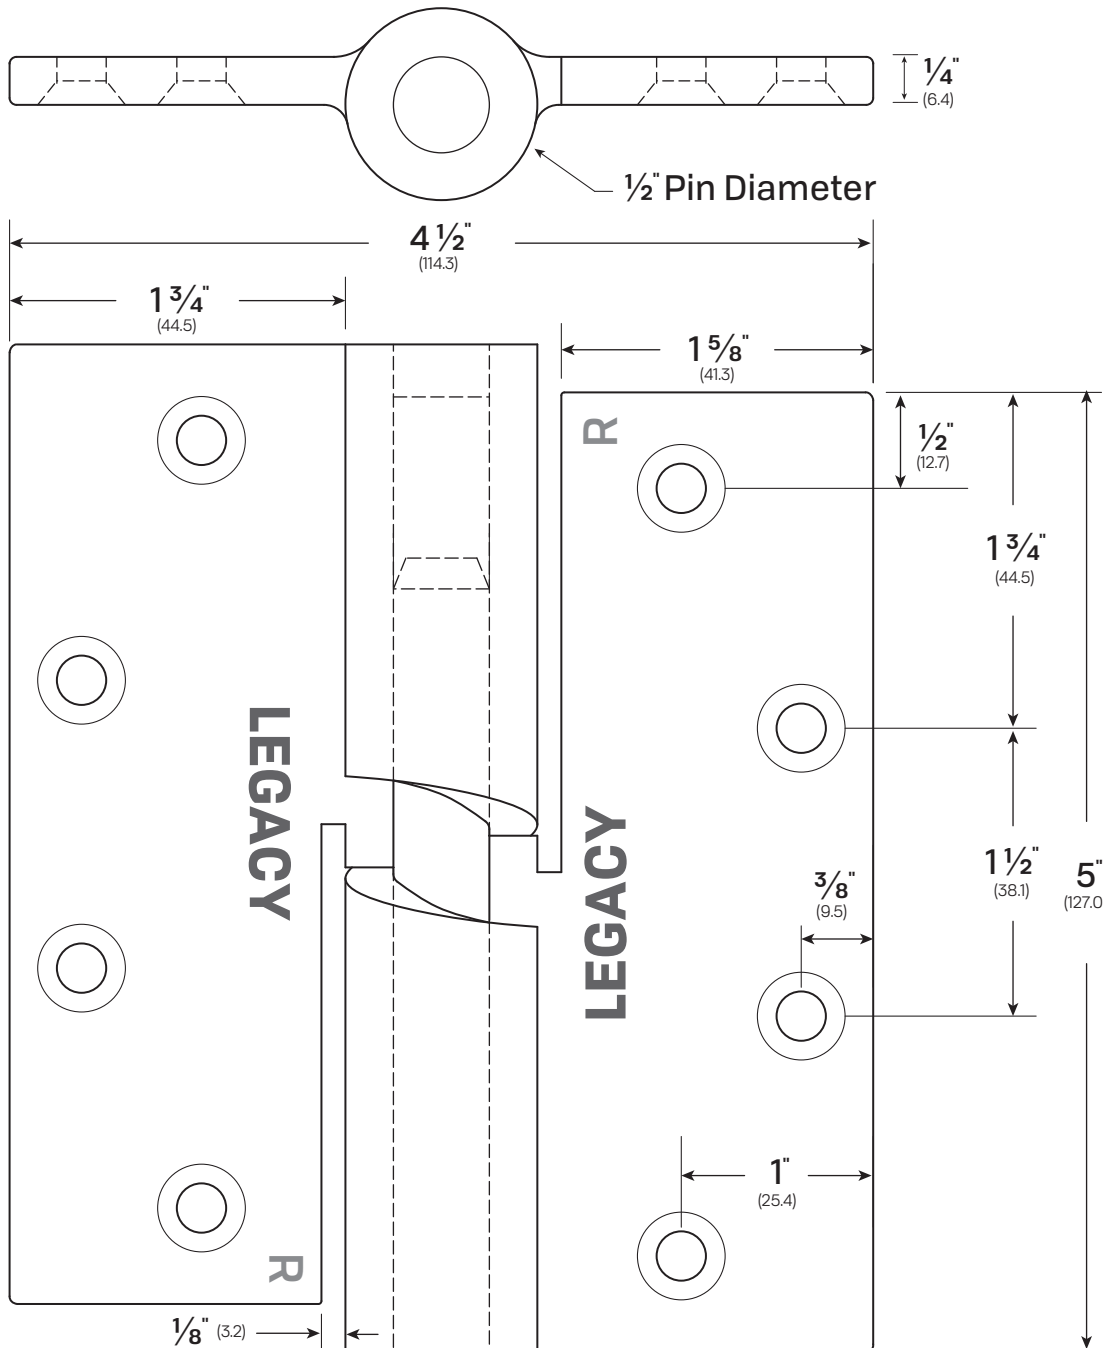

MATERIALS / SPECIFICATIONS

- 1 screw pack includes all **machine** screws (24), and 1/2 **wood** screws (12).
- Screw size: **12 - 24 x 3/4"**
- All hinges are **ANSI** template.
- Mortise/ Handed - specify right or left hand.
- Minimum clearance at head of frame is 3/16". For doors greater than 1- 3/4" clearance is 1/4".
- For 1Z950 and 1Z9500 screws must be engaged no less than .35" in ASTM A-36 steel reinforcement.
- For 1- 1/2" pairs rating is 500 lbs.
- Lift at 180" opening is 5/16"

FINISHES

1059SS Stainless Steel

- 1020 Stainless Steel, precision investment cast.
- Hardened tool steel, Hardened & chrome finished to Rockwell C 60 to meet ASME/ANSI B 18.3 specs
- 630 (US32D)

LEGACY	PEMKO
1059	-
NGP	ZERO
-	Z950