



Website: DoorFloodBarrier.com
General Inquiries: contact@legacyllc.com
Orders: orders@legacyllc.com
Main Office: 415 Concord Avenue Bronx, NY 10455
Phone: (718) 292-5333
Fax: (888) 383-3330



PROJECT

DATE


COMPANY

NOTES


Single Flood Shield for Standard Doors

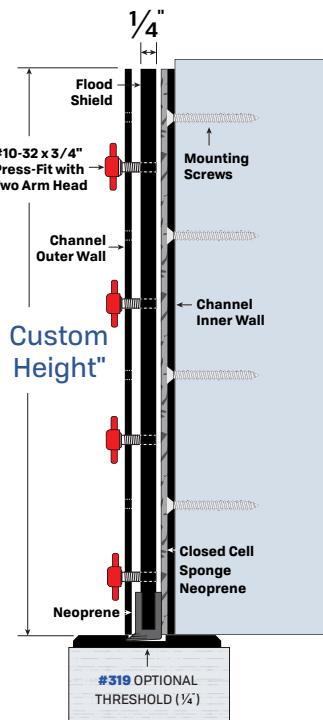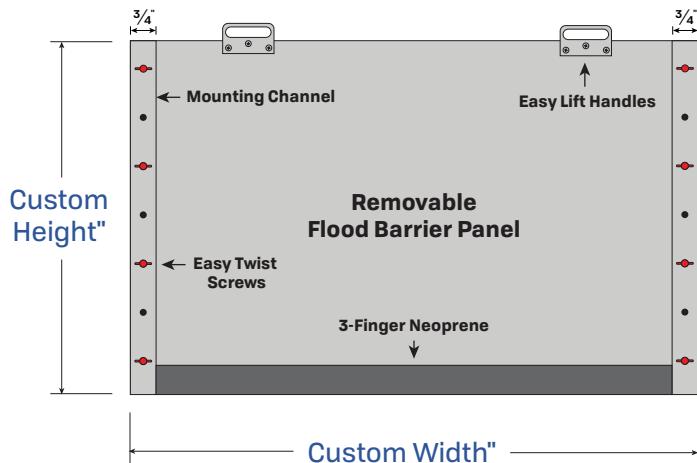

#5027 ⚫ MOUNTED TO INSIDE OF FRAME

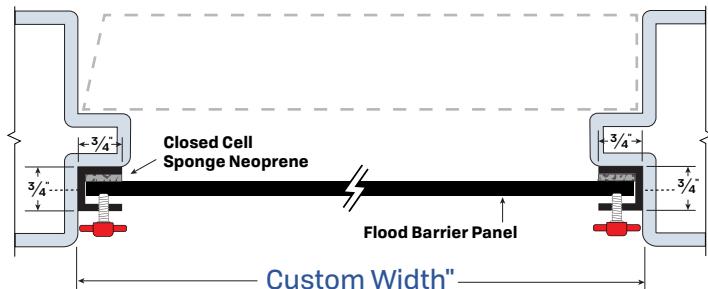

#5127 ⚫ MOUNTED TO OUTSIDE OF FRAME

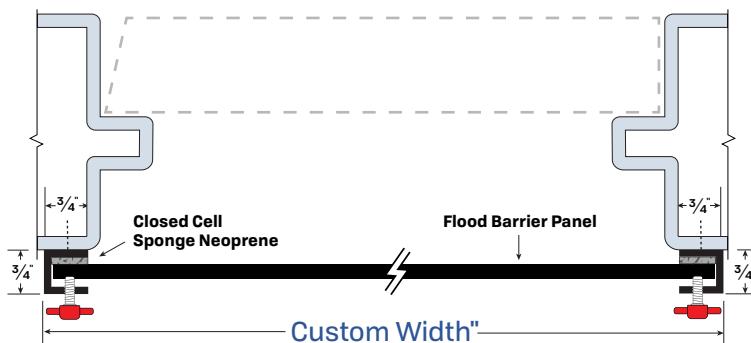

Product Specifications

Panel	5052 marine aluminum alloy
Frames	Channel 6062 alloy T5-T6, with 10-32 stainless steel Allen head tightening screws every 8" on center.
Seal	Sponge Neoprene within the channels and Solid Neoprene 3-Finger Rubber on the bottom of the panel.
Hardware	#10 x 1-1/4" FPH with plastic expansion tube anchors.
Installation	Snap covers for safety provided for the top of the channels and for the mounting holes.
Floor Surface	Can be installed on hollow metal, aluminum or wood frames; and on concrete, brick or metal surfaces.
	Optional flat 1/4" x 2" bevels on 2 sides of the aluminum plate - #319 Threshold