

# LOCINOX

Let's make it better together

## PRODUCT CATALOG

Discover our new  
products on page 6 - 8





Hello!

Happy to know that you hold our new catalogue in your hands. We are proud and excited at the same time to introduce you to our innovations.

We are constantly strengthening our position as the top brand in the gate and fence hardware industry. As a true expert in the field, we only aim for the best. Not only with the infamous locks and keeps, but in the fast growing segment of Automation & Electronics as well.

Our R&D team, which is in continuous expansion, has once again developed highly disruptive products which will shake the market. Always with our strict requirements in mind: superb product quality, fast & easy installation, unprecedented reliability, beautiful aesthetics and with added value for you and your clients.

This year, a few innovations stand out of the crowd: the improved SlimStone-2 keypad with two internal relays, the Fifty- and Sixtylocks insert locks and the handy Lion-VTC drilling jig. All three demonstrate the continuous drive to do better and to keep innovating.

Customer service remains to reinforce our healthy partnership. Our 24h shipment, with a 98% delivery rate on time, is maybe one of the best examples.

Sit back, relax and get inspired.  
Happy exploring,

Mik Emmerechts  
CEO Locinox



LOCINOX  
COMPANY MOVIE



# Index

## **Locinox is an international trendsetter in the fencing and gate world.**

Our products are designed specifically for your sector where innovation, quality and ease of installation make the difference.

A growing team of professionals, with a single goal in mind: to increase your efficiency!

Let's make better fences together!

Gate closers	
• Tiger	14
• Mammoth	15
• Samson-2	17
• Lion	18
• Rhino	19
• Verticlose-2	21
• Verticlose-2 Wall	22
Automation & Electronics	
• SlimStone	26
• Electric keeps	28
• Electromagnetic locks	30
• Electradrop	42
• Electric accessories	43
• Power supplies	44
Turnstiles	
• Turnitec	52
• Access control modules	53
Locks	
• For swing gates	59
• For child safety gates	73
• For sliding gates	76
• Insert locks	80
Keeps	
• For swing gates	93
• For sliding gates	96
• For swimming pool gates	98
• For insert locks	101
Hinges	
• For industrial and ornamental gates	109
• For small gates	130
Dropbolts & Ground catchers	
• Dropbolts	138
• Ground catchers	142
Gate catchers	
• Hot-dip galvanised gate catchers	146
• Aluminum gate catchers	147
Tools	
• Tools for locks & keeps	150
• Tools for gate closers	152
Accessories	
• Handles	160
• Adaptor plates	168
• Cylinders	173
• Accessories for gates	177
• Security strips	181
Marketing tools	183

# Our products

## INNOVATION

A motivated team of engineers and prototypers work hard on a daily basis to further expand the Locinox range with new products.


You can find many, pioneering innovations in this catalogue.



## INDUSTRIAL QUALITY

Locinox products are of industrial quality. They are tested extensively by our R&D department in the most extreme circumstances.

We test every product a minimum of 500,000 movements before bringing it to the market. Using Locinox products extend the life of your gates and fences!

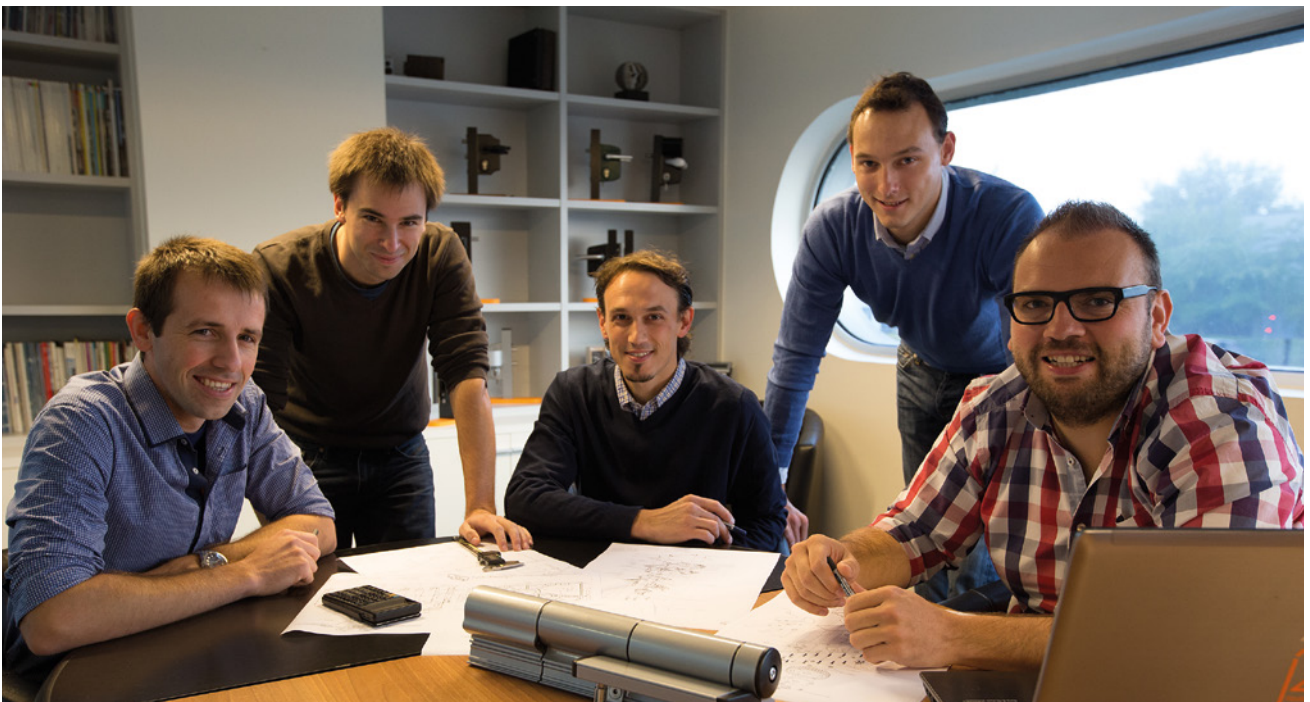

## WEATHERPROOF

High quality materials and surface treatments ready for years of outdoor use are a basic requirement. This is why Locinox only uses stainless steel and non-ferro metals as raw materials for its products.

We choose, whenever possible, hot-dip galvanisation as surface treatment to maintain high standards. This way, our products have a longer life cycle than cheaper alternatives.



## EASE OF INSTALLATION

"Time is money", you will most probably agree. This is why our products are designed as such that installation happens very quickly and easy.

Thanks to the special tools, the patented Quick-Fix and the Plug & Play design - installation happens in a blink of an eye.

The pre-fitted Quick-Fix solution guarantees a lightning fast installation. This way, the products are mounted very firmly.





# Our promises



## **MODULARITY**

The products in our range are designed for maximum interchangeability. A multitude of combinations is possible to assure maximum flexibility according to your clients' needs.

Even after installation, our products can be easily adjusted and/or replaced.

## **CUSTOM ASSEMBLY**

The modularity of our products allows you to choose from many different configurations. Locinox will assemble every possible configuration upon request.



Moreover, our well-organised logistics guarantee a shipment of our catalogue products within 24h after your order. This will allow you to react quickly to your clients' needs!



## **AT YOUR SERVICE!**

Our sales team is easy to reach and will give you a prompt reply by phone or e-mail in no less than 7 supported languages.

They will supply you the correct product information and are happy to help you in choosing the right solution for the given situation.

Your orders are confirmed on the same day!

# Our concepts



## AUTOMATED SWING GATE

**SLIMSTONE** Sturdy, weather resistant keypad (IP68) (p.26) | **ELECTRADROP** Motorised electrical dropbolt (p.42)

**OGS** Off-centered ground stop and catch (p.142) | **1DBH-** 90° 2-way adjustable bearing hinge (p.127)

**TRICONE** Design led lighting for gates (IP54) (p.43)



## SELF-CLOSING PEDESTRIAN GATE WITH ELECTRIC LOCK

**SAMSON-2** (p.17)

Versatile hydraulic gate closer

**GBMU4D** (p.112)

4-way adjustable, 180° hinge

**SLIMSTONE** (p.26)

Sturdy, weather resistant keypad (IP68)

**LIKQ U2** (p.69)

Electric lock - Fail Close

**SHKL QF** (p.95)

Security keep and gate stop

**DVK** (p.44)

Guiding cable

**PB-1 + DC-POWER-12V-20W** (p.17 + p.46)

Powerbox - Transformer housing (IP66)

+ Safety power supply 12 V and 13 V DC

**TRICONE** (p.43)

Design led lighting for gates (IP54)





## SELF-CLOSING PEDESTRIAN GATE WITH MAGNETIC LOCK

**MAMMOTH-180** (p.15)

Hydraulic 180° gate closer and hinge in one

**SLIMSTONE** (p.26)

Sturdy, weather resistant keypad (IP68)

**MAG** (p.38)

Magnetic lock (600/ 1200 lbs) with integrated handles

**DINO** (p.126)


180° double bearing hinge with 2 x 13/ 16" adjustability

**PB-1 + DC-POWER-12V-20W** (p.17 + p.46)

Powerbox - Transformer housing (IP66) + Safety power supply 12 V and 13 V DC

**TRICONE** (p.43)

Design led lighting for gates (IP54)

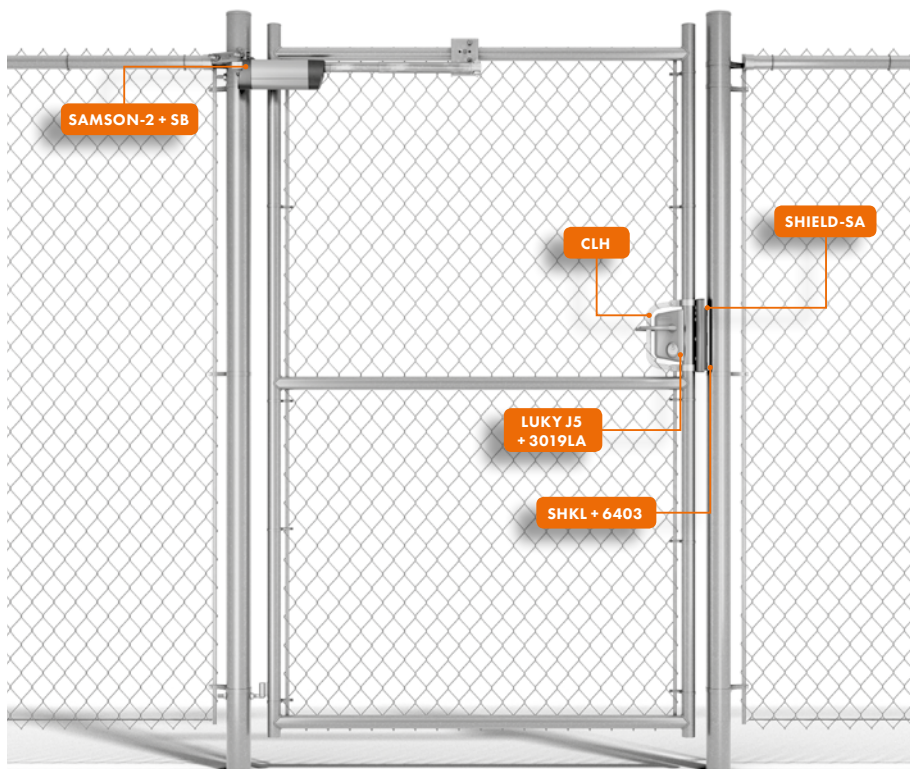

## QUALITY & SAFE SOLUTIONS FOR ANY CHAIN LINK GATE

**SAMSON-2** (p.17)

Strong 150° hydraulic gate closer for heavy gates up to 330 lbs

**SB** (p.171)

Galvanized bracket to mount Samson on chain link gates

**LUKY J5** (p.61)

Gate lock with handles – includes 2 US Mortise cylinders

**3019LA** (p.186)

Round adaptor plate for locks

**6403** (p.168)

Round adaptor plate for SH keeps

**SHKL** (p.95)

Industrial stainless steel security keep

**SHIELD-SH** (p.170)

Aluminum vandal-proof anti pick plate for SH keeps

**CLH** (p.169)

Chain link tension bar adapter for locks

# Our latest Innovations



**Innovation,  
the engine for  
your growth!**

**SLIMSTONE-2**  
Sturdy, frost-free and weather resistant keypad  
with 2 integrated relays



## NEW QUICK-FIX

The highly improved stainless steel fixation bolt. This unique and patented system is fitted on most of the Locinox products. The innovative design ensures you can reuse it over and over. Thanks to the 2.200 lbs pulling resistance, everything is fixed very tight!

## "Smart solutions, better fences"


Protecting what matters. Everyone wants to be safe, right? At home, on their job, at school, out when sporting, etc... Locinox provides that degree of security and comfort. As a Belgium based trendsetter, manufacturer and reputed market leader, we take care of your peace of mind.

Thanks to continuous innovation, thorough quality checks and efficient installation methods, Locinox is the right partner for your gate and fencing projects. Every product is designed and

engineered with eye for detail, extreme weatherproofness and added value. All to guarantee an improved durability and lots of modularity and flexibility. Our products are determined to be your partner for the long run and ensure your project to stand out, for a very long time.

With every new innovation we're launching, quality, durability and user friendliness are key. We rely on the best components for the best possible solutions. Our test results don't lie - Locinox products stand the test of time!

Fixed in the post

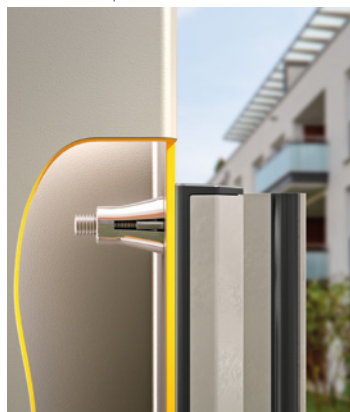

Unscrewed for reuse







### VERTICLOSE-2

Highly versatile gate closer with excellent features. The powerful Verticlose-2 is the perfect gate closer for both 90° and 180° hinge situations.



### LION-VTC DRILL

Toolbox with the required tools for a flawless installation of the Lion and Verticlose-2 gate closers. No more measuring: just fix, drill, install and ready. Highly recommended.



### VERTICLOSE-2 WALL

Specially designed gate closer for wall mounting where the gate closer is positioned 90° in relation to the gate. The unique design of the arm allows it to turn around the wall or post, ensuring a large opening angle.





### **FIFTYLOCK**

Prime insert lock with 100% stainless steel mechanism and 1-3/16" backset for profiles of 2" and more.



**Fast assembly: Click-it!**



### **SIXTYLOCK**

Prime insert lock with 100% stainless steel mechanism and 1-9/16" backset for profiles of 2-3/8" and more.



### **BOLTON4D**

Bolt-on 4D hinge with Quick-Fix or through and through fixation. The BOLTON4D hinge is as of now also available in M12 and M16 version.



# Loc-eshop



In a world where business never stops and where providing a fast service is crucial, Locinox is determined to stay ahead.

Order any of our products 24/7 thanks to the Loc-eshop.

Visit the Loc-eshop on [www.locinox.com](http://www.locinox.com)

## LOC E SHOP

order when it suits you

**Guaranteed  
shipping  
within 24h**







# Gate closers

Hydraulic gate closers will transform any gate into a self-closing solution. Comfort, safety and peace of mind are guaranteed thanks to pure hydraulic power. High quality components ensure Locinox closers to be 100% weatherproof, maintenance-free and extremely durable. A constant and consistent functioning is guaranteed during an ice cold winter or a sweltering summer. The unique concept ensures an easy and efficient fixation thanks to the patented Quick-Fix system. Moreover, closing speed and final snap can be adjusted very precisely and 100% to your customers' wishes.



14 Tiger



15 Mammoth



17 Samson-2



18 Lion



19 Rhino



21 Verticlose-2



22 Verticlose-2 Wall




# Cutting edge self-closing technology

## 1 ALWAYS A CONSTANT CLOSING SPEED FROM FREEZING WINTER TO SIZZLING SUMMER

If your gate closes too slow, children or pets could sneak through. If your gate closes too fast, it might become a problem for wheelchair users. A loud slamming gate is not only annoying for you or your neighbours, it's also harmful for your gates.


The Active Thermal System, our own cutting-edge development, guarantees a constant closing speed, regardless of the outside temperature.

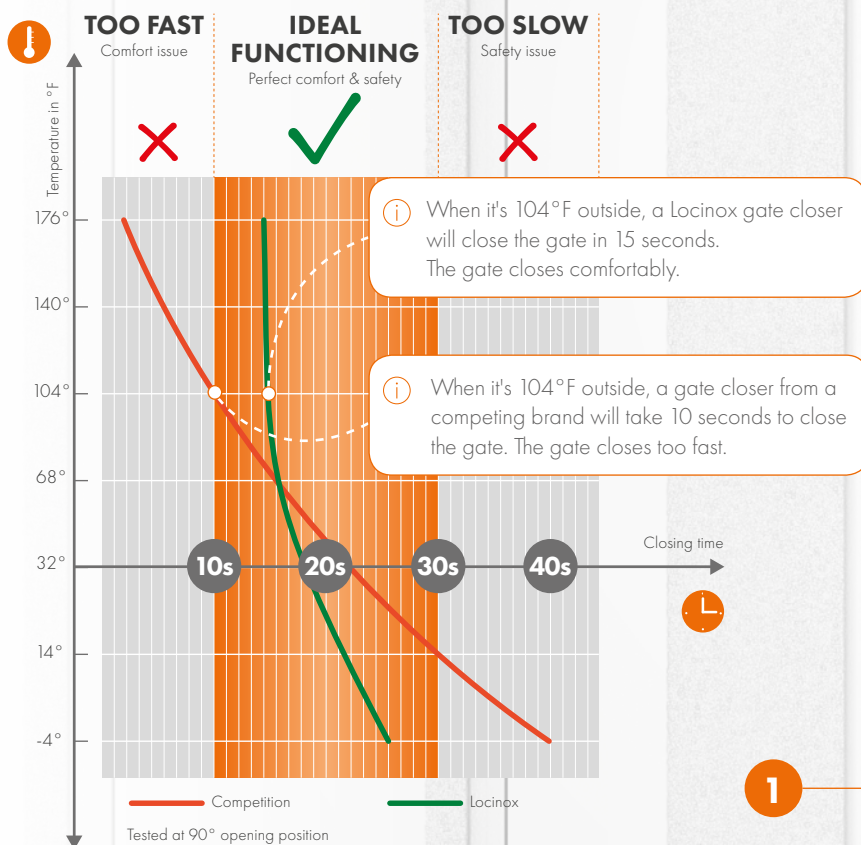

## 2 ADJUST SPEED AND FINAL SNAP PRECISELY

Some customers prefer their gate to close slowly, while others want it to go a little faster. No problem! All of our gate closers can easily be adjusted in a matter of seconds to the wishes of your customers.

The final snap allows the gate to speed up a little at the end: this way, you are reassured the gate is properly closed. The final snap can easily be adjusted to any need.

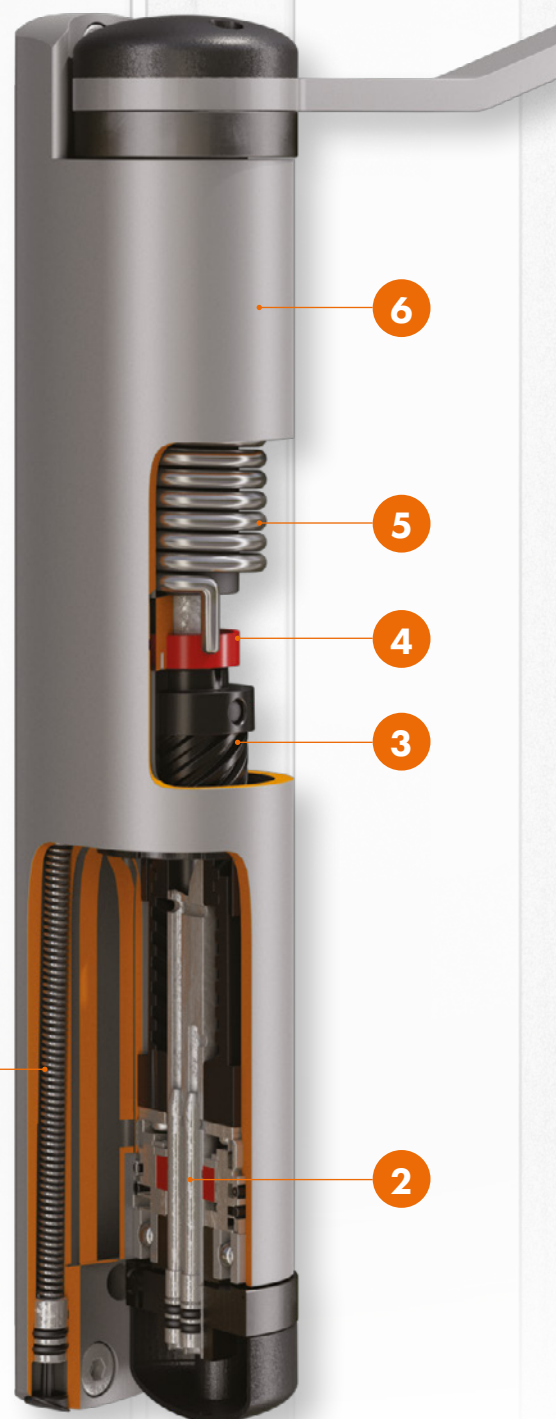



### 3 FUNCTIONS COMFORTABLY

The in-house developed High-Helix screws guarantee a consistent functionality and ensure a comfortable opening speed for the elderly or disabled.

### 4 DUST- & WATERPROOF

Our gate closers are equipped with rotary seals. These seals protect the gate closers from dirt and dust particles intruding the mechanism, assuring your customers of worry-free functioning for many years to come.


### 5 CLOSSES EVERY TIME

The powerful torsion spring guarantees the necessary closing force. Therefore, your gate will always close: unaffected by strong winds, the width of your gate wing or the outside temperature. You can rest assured.

### 6 100% PROTECTED


The aluminum powder coated housing guarantees full protection against any weather conditions. The housing is windproof, frost-free and dust- & waterproof, allowing your gate closer to function perfectly.

## A GATE CLOSER FOR EVERY GATE

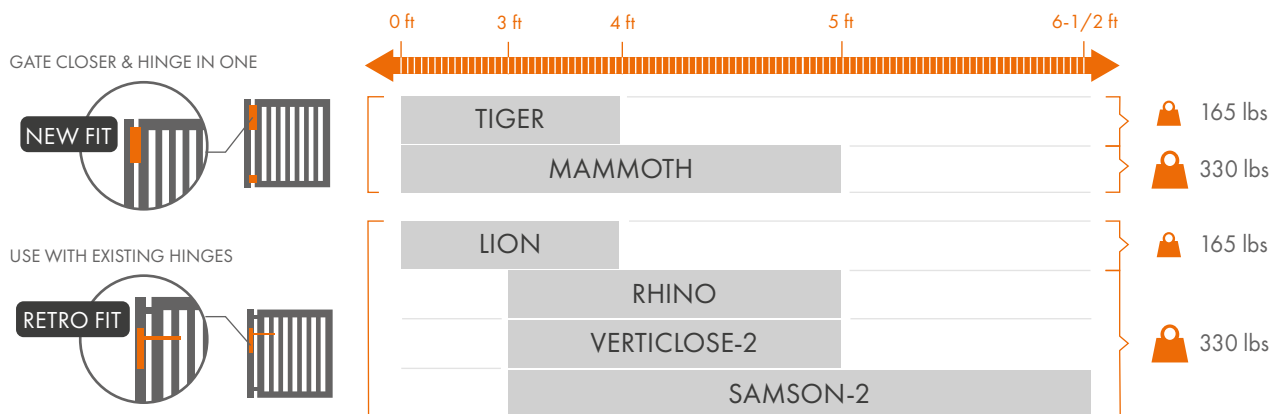


### OPENING ANGLE

ALL LOCINOX GATE CLOSERS

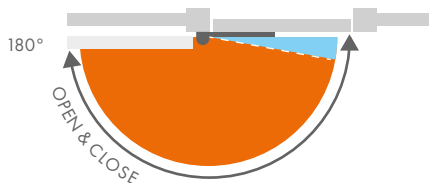

SAMSON GATE CLOSER



Max 150° depending on position of hinge and gate closer

Recommended gate width

FITS CHAIN LINK WITH OPTIONAL BRACKETS	
TIGER	✓
MAMMOTH	✓
SAMSON-2	✓

Self-closing	✓
Final snap	✓

Find your gate closer thanks to our [handy gate closer configurator](http://www.locinoxusa.com) on [www.locinoxusa.com](http://www.locinoxusa.com)

## Compact hinge and gate closer in one

TIGER (Patented)

180° self-closing hydraulic hinge with precise adjustments on speed and final snap. The aluminum powder coated housing and unique high-tech components allow the Tiger to function perfectly in any weather situation. We highly recommend the Tigerdrill for an even more efficient installation. The Puma hinge is included.



**24h  
SHIPPING**



### Color options




### Specifications

- ✓ Automatic 180° closure with adjustable closing force
- ✓ Aesthetic design
- ✓ Powder coated aluminum housing
- ✓ Closing speed unaffected by humidity and temperature changes
- ✓ Vandal-proof
- ✓ For left and right turning gates
- ✓ Fast and easy fixation with Quick-Fix
- ✓ 2-dimensionally adjustable, Gap & Ht x 3/4"
- ✓ Easy to open: Max opening force 3.5 lbs

### Order code

**TIGER** Hydraulic gate closer and Puma 180° hinge for gates up to 150 lbs **24h  
SHIPPING**

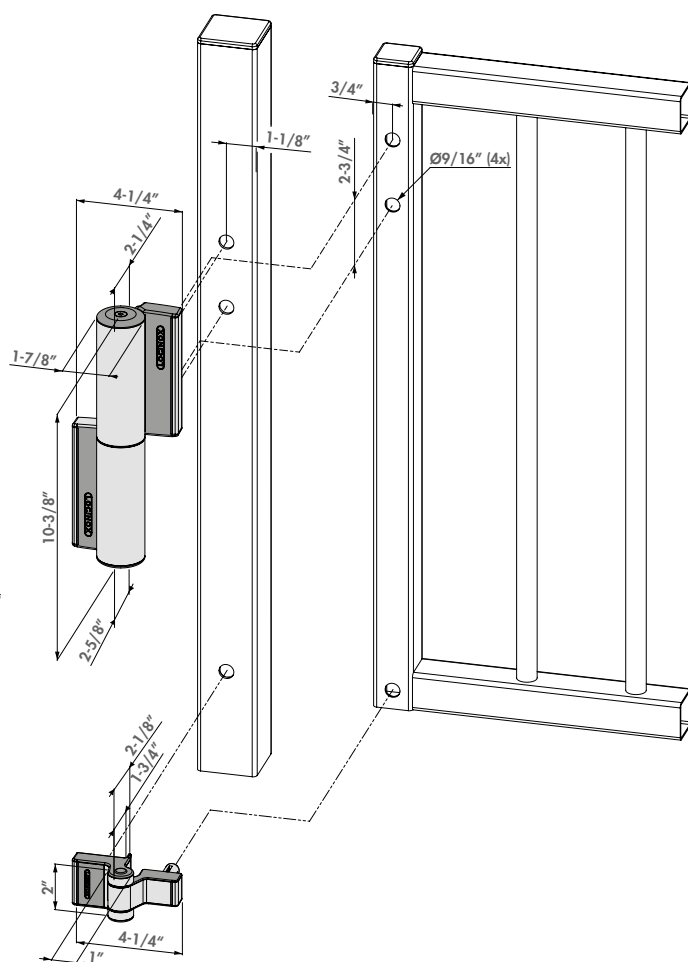

### Recommended installation tools



**TIGERDRILL**  
P. 152



**DRILLWISE-II**  
P. 155



**DRILLWISE-IV**  
P. 155



**CLB-TIGER**  
P. 172



## Stylish hydraulic gate closer for heavy gates

MAMMOTH-180 (Patented)

Elegant and powerful self-closing gate closer for 180° gate situations. The Mammoth is a real muscleman, perfectly fit for heavy gates up to 330 lbs. It is equipped with a double bearing for an extremely comfortable functionality. The Active Thermal System guarantees a constant closing speed, unaffected by weather conditions. The Dino hinge is included.



**24h  
SHIPPING**



### Color options




### Specifications

- ✓ Self-closing hinge with patented hydraulic damping
- ✓ Aesthetic design
- ✓ Powder coated aluminum housing
- ✓ Closing speed unaffected by temperature changes
- ✓ Easy to open: Max opening force 3.5 lbs
- ✓ Vandal-proof
- ✓ For left and right opening gates
- ✓ Fast and easy installation with Quick-Fix

### Order code

**MAMMOTH-180** Stylish hydraulic gate closer for heavy gates **24h  
SHIPPING**

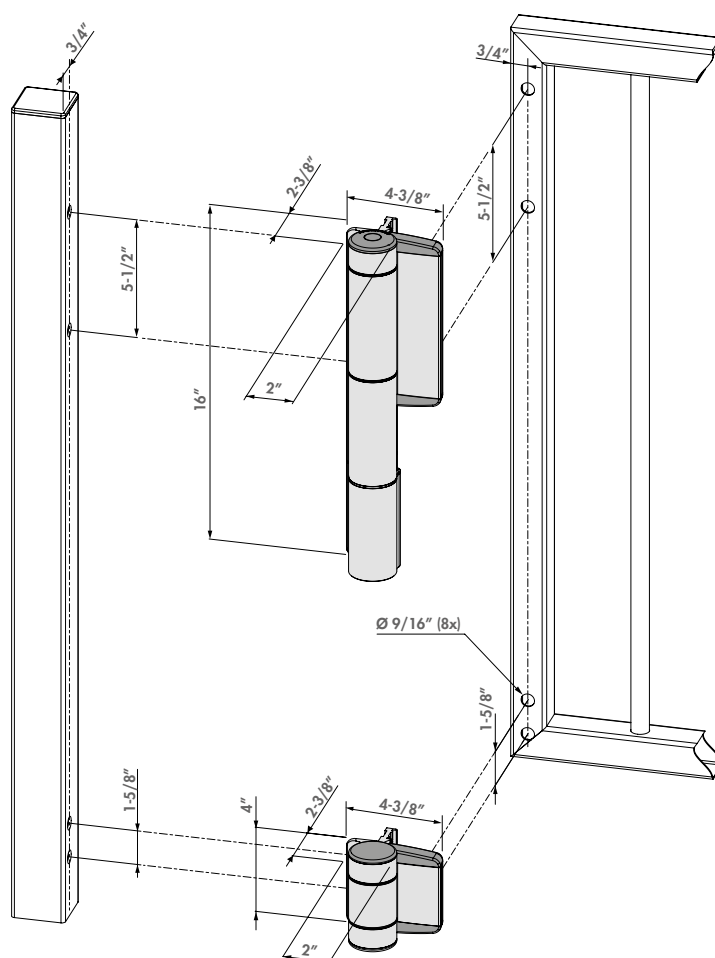

### Recommended installation tools



**DRILLWISE-II**  
P. 155



**DRILLWISE-IV**  
P. 155



**CLB-MAMMOTH**  
P. 172



**A SILENT  
OPENING &  
CLOSING**



**SAFE  
FOR  
WHEELCHAIR  
USERS**

EXCEPTIONAL  
PRECISE ADJUSTMENT OF  
SPEED & FINAL SNAP  
FOR YOUR  
**COMFORT**



**VANDAL  
PROOF**

# 10

**FEATURES  
SETTING LOCINOX  
GATE CLOSERS APART!**



**CHILD  
& PET  
FRIENDLY**

**EFFICIENT  
INSTALLATION  
FAST & EASY**



**DURABLE**  
TESTED FOR  
**500 000**  
MOVEMENTS



**100%  
HYDRAULIC  
GREEN &  
MAINTENANCE  
FREE**

EXTREME  
**WEATHERPROOF**

CONSTANT CLOSING SPEED

**-22° ► -158°F**



**3 YEAR  
WARRANTY**

## Hydraulic gate closer for large gates

SAMSON-2 (Patented)



Simple installation and flexible functionality make it the perfect fit for larger gates. Samson-2 is a polyvalent hydraulic gate closer developed with high quality components for an exceptional long life span. Temperature changes do not affect the smooth and constant functionality. The set of mounting brackets that are delivered with the closer make Samson-2 fit for any gate. Also fitted for chain link fences.

**24h  
SHIPPING**




### Color options




### Specifications

- ✓ Opening angle up to 150° depending on the situation
- ✓ Specially developed for outdoor use: industrial quality
- ✓ Powder coated aluminum housing
- ✓ Closing speed unaffected by temperature changes
- ✓ Fast and easy fixation with Quick-Fix
- ✓ For left and right turning gates

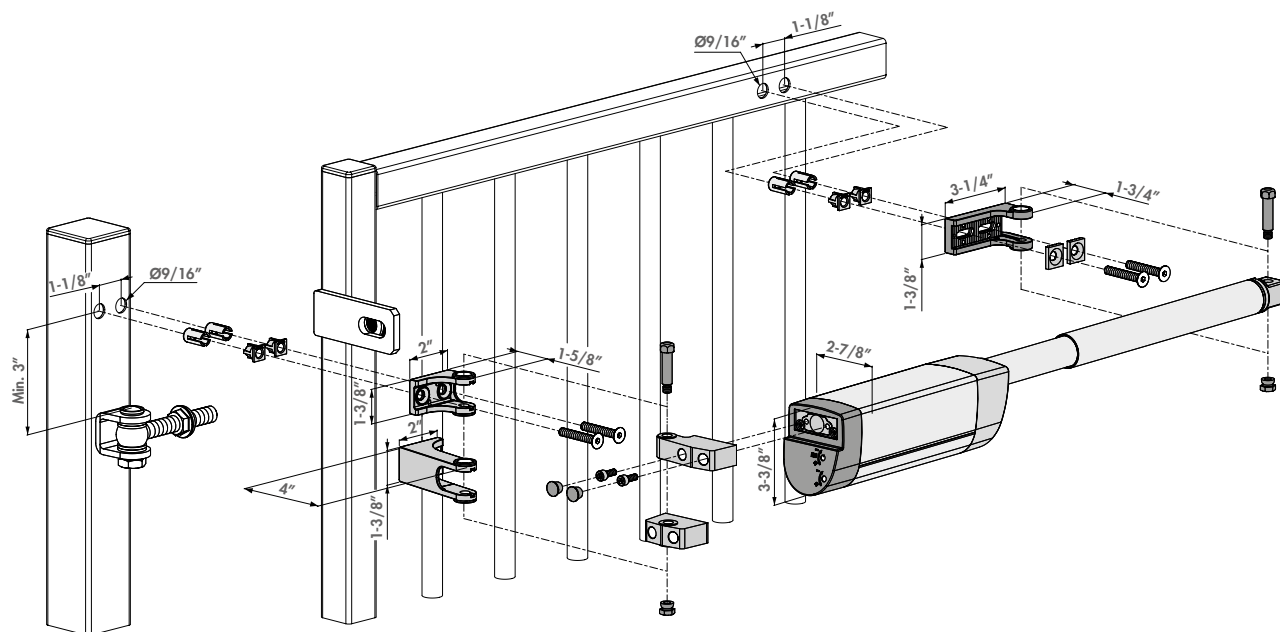

### Recommended installation tools



### Order code

**SAMSON-2** Hydraulic gate closer for gates up to 300 lbs

**DRILLWISE-II**  
P. 155

**DRILLWISE-IV**  
P. 155

**SB-**  
P. 171



**NEW** Compact and polyvalent gate closer, fits every gate situation

LION (Patented)

The attractive and compact Lion gate closer is unique in its kind. This hydraulic all-rounder is fit for every possible gate situation. Moreover, both 90° and 180° railsets are included in the package, allowing for more flexibility on site. The powder coated aluminum housing combines a handsome look with a spotless functioning for many years. Choose the Lion-VTC Drill for an even faster installation.



**24h  
SHIPPING**

## Color options



## Specifications

- ✓ Automatic 180° closing with adjustable closing speed and final snap
- ✓ Railset included for 90° and 180° situations
- ✓ Compact and aesthetic design
- ✓ Powder coated aluminum housing
- ✓ Closing speed unaffected by temperature changes
- ✓ For left and right handed gates
- ✓ Integrated pretension for extremely smooth installation
- ✓ Fast and easy installation with Quick-Fix

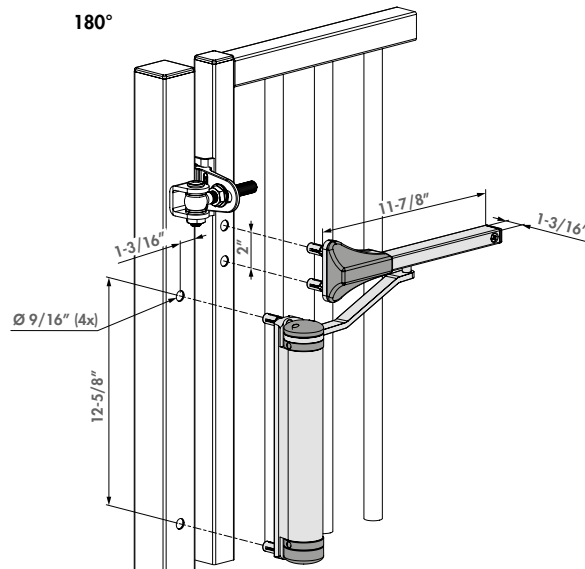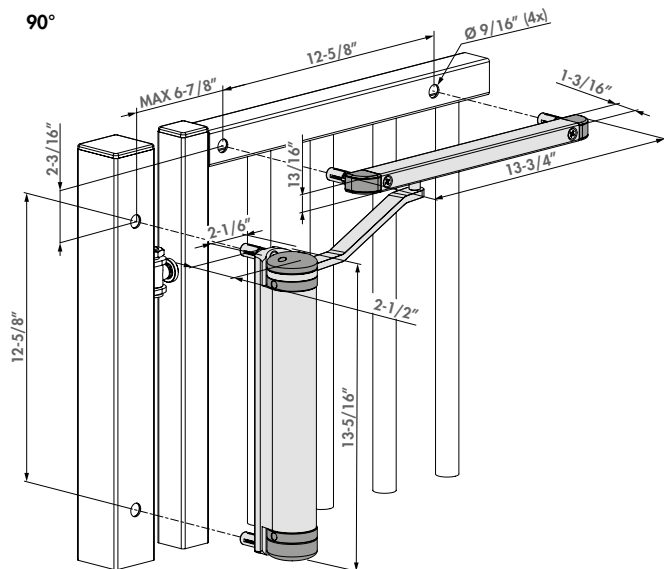

## Recommended installation tools

LION-VTC-DRILL  
P. 154DRILLVISE-II  
P. 155DRILLVISE-IV  
P. 155

## Order code

LION Compact hydraulic gate closer for any gate situation **24h  
SHIPPING**



## NEW Aesthetical 180° gate closer with direct connection to the hinge

### RHINO (Patented)

Transform your 180° hinge into a self-closing solution thanks to our Rhino hydraulic gate closer. The direct connection to the Locinox hinge guarantees the discreet look and efficient transmission of the energy required to close the gate perfectly. The aluminum powder coated housing ensures a corrosion-free existence and smooth operation in any weather. The Rhinodrill jig guarantees an extremely efficient installation.



### Color options


ZILV 9005

### Specifications

- ✓ 180° hydraulic gate closer with adjustable speed and final snap
- ✓ Closing speed unaffected by temperature changes
- ✓ Compact and aesthetic design
- ✓ Powder coated aluminum housing
- ✓ Fits 180° hinges M16 & M20 (GBMU, GBMU4D & BOLTON4D)
- ✓ Use of bearing eyebolt (1034-ROLL-M16) recommended
- ✓ Integrated pretension for extremely smooth installation
- ✓ For left and right handed gates

### Order code

**RHINO** Hydraulic gate closer for gates up to 300 lbs

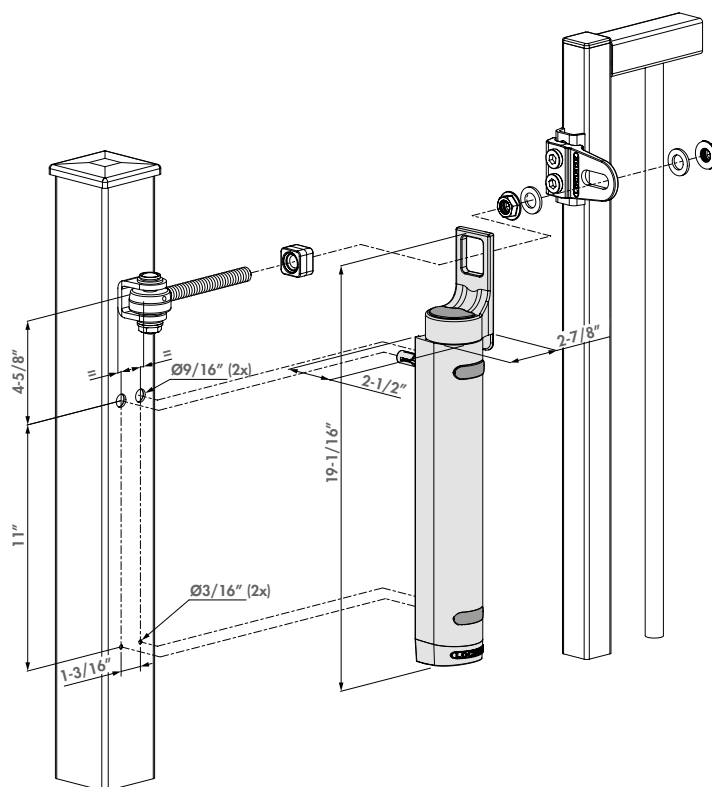

### Recommended installation tools



**RHINODRILL**  
P. 153



**DRILLVISE-II**  
P. 155



**DRILLVISE-IV**  
P. 155







**NEW** Powerful all-round hydraulic gate closer for 90° and 180° hinges

VERTICLOSE-2- (Patented)



The Verticlose-2 gate closer is the top line in the Verticlose product range. Highly versatile and with excellent features, the powerful Verticlose-2 is the perfect gate closer for both 90° and 180° hinge situations. The integrated pretension, micro adjustment of speed and final snap and the Quick-Fix fixation guarantee a very quick and efficient installation. The aesthetic aluminum powder coated housing in combination with highly durable internal components guarantee a very long life cycle.

**24h  
SHIPPING**

## Color options





## Specifications

- ✓ Micro adjustment of speed and final snap
- ✓ Railset included for 90° and 180° situations
- ✓ Aesthetic & compact design
- ✓ Powder coated aluminum housing, perfectly suited for outdoor use
- ✓ Integrated pretension for extra smooth installation
- ✓ Closing force over the full 180° opening angle
- ✓ Firmly fixed thanks to patented Quick-Fix system

## Order code

**VERTICLOSE-2-** Powerful and all-round hydraulic gate closer for 90° and 180° hinges **24h SHIPPING**

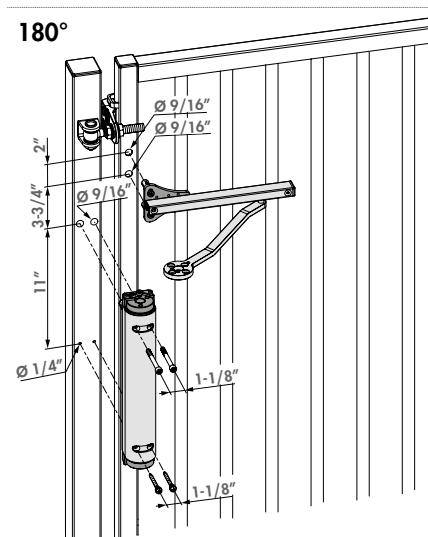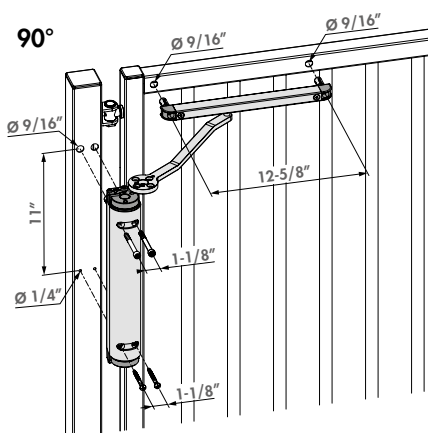

## Recommended installation tools



**LION-VTC-DRILL**  
P. 154



**DRILLVISE-II**  
P. 155



**DRILLVISE-IV**  
P. 155

**NEW**

## Powerful and all-round hydraulic gate closer for wall mounting

VERTICLOSE-2-WALL- (Patented)

The Verticlose-2 Wall gate closer has been specifically designed for wall mounting where the gate closer itself is positioned at a 90° position in relation to the gate. The specially designed arm turns around the wall or post, ensuring a large opening angle. The aesthetic powder coated housing and high-end components make sure that the Verticlose-2 Wall is perfectly weatherproof.



**24h  
SHIPPING**



### Color options



### Specifications

- ✓ Self-closing gate closer with adjustable speed and final snap
- ✓ Specially designed arm for wall mounting while guaranteeing a big opening angle
- ✓ Aesthetic & compact design
- ✓ Powder coated aluminum housing
- ✓ Integrated pretension for extra smooth installation
- ✓ Closing force over the full 180° opening angle
- ✓ Firmly fixed thanks to patented Quick-Fix system


### Order code

**VERTICLOSE-2-WALL-**


Powerful and all-round hydraulic gate closer for wall mounting **24h SHIPPING**



**90°**

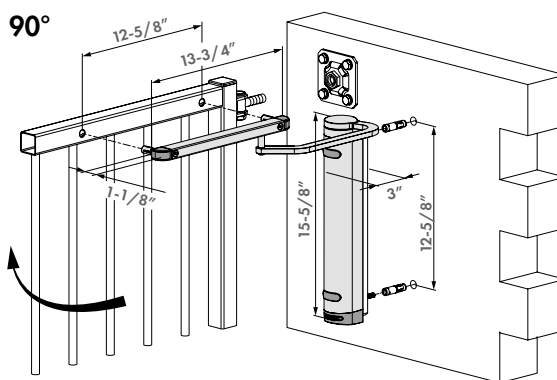

**180°**

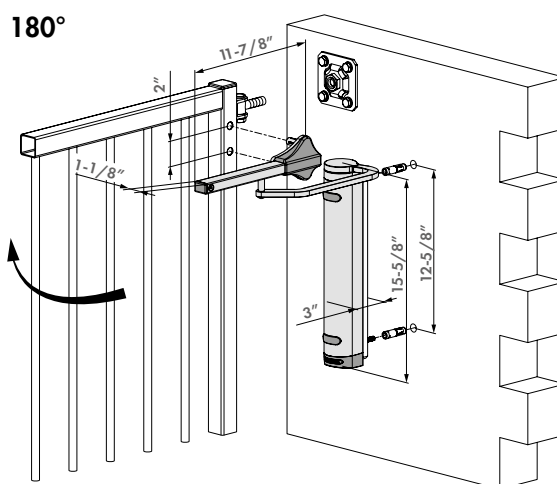

### Recommended installation tools



LION-VTC-DRILL  
P. 154



DRILLVISE-II  
P. 155



DRILLVISE-IV  
P. 155









# Automation & Electronics

Automation has become a fundamental factor in the fence & gate sector. Locinox offers a wide range of solutions to manufacture user-friendly smart gates and fences.



26 Keypads

28 Electric strikes



31 Electromagnetic locks

42 Electradrop



43 Electric accessories

44 Power supplies



# i Outdoor keypads

The SlimStone-2 keypad with two integrated relays sets the new standard! With an IP 68 value SlimStone is designed to smoothly endure the most extreme weather conditions. Moreover, the Smart Heating System guarantees a frost-free and perfectly working keypad during winter time.

SlimStone-2 can monitor all Locinox access control products, as for example the surface mounted Modulec electric strike or our range of magnetic locks. Locinox automation products also fit this range. A quick and efficient installation ensures comfort and peace of mind.



Timesaving



Weatherproof



Quick-Fix fixation



IP68




**24h  
SHIPPING**

## Sturdy, weather resistant keypad

SLIMSTONE-

The SlimStone keypad with integrated led lighting, is unique in its kind. The keypad is developed and tested to guarantee uninterrupted use in the most extreme weather conditions. The integrated relay, with a normally used open and closed contact, makes the combination with Locinox products and other automation products very easy. Both the installation and programming of the SlimStone are made very easy.

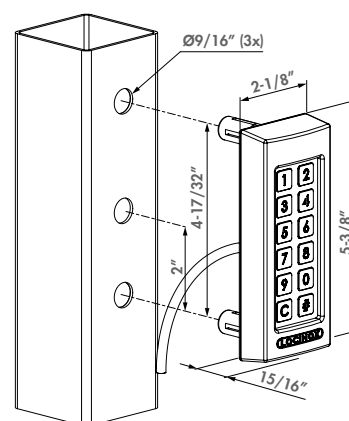

### Color options



### Specifications

- ✓ IP68 rated - Extremely resistant to water and dust
- ✓ Aluminum vandal-proof housing with scratch-resistant textured lacquer
- ✓ Energy efficient adjustable white led lights
- ✓ Highly resistant stainless steel push buttons tested for 1,000,000 pushes and more
- ✓ Easy programming of up to 100 user codes
- ✓ Smart heating element guarantees frost-free use
- ✓ Tested from -22°F to 185°F
- ✓ Adjustable time range between pulse and timer mode (100ms - 99s)
- ✓ Voltage: 10 up to 26 V AC/DC
- ✓ Current: 1.0 A (with heating) - Pmax= 13,5W (with max heating)

### Order code

**SLIMSTONE-** Weatherproof keypad with integrated relay, Inputvoltage 10 to 26 V AC/DC

### Compatible products



**MODULEC-SA**  
P. 29



**MODULEC-SH**  
P. 29



**LIKQ U2**  
P. 69



**B-MAG-**  
P. 31





## NEW Sturdy, frost-free and weather resistant keypad with 2 integrated relays

### SLIMSTONE-2-


The new SlimStone-2 keypad contains two relays for an improved access control and advanced flexibility. It offers the possibility to command 2 different automation devices or to open the gate in 2 different ways. This keypad with integrated LED lighting is unique thanks to its strength and extreme weather resistance (IP68). In all weather conditions, access control is guaranteed. Both integrated relays, with a Fail Open and Fail Close contact, allow an easy connection to Locinox and third-party automation products.

#### Color options



#### Specifications

- ✓ IP68 rated - Extremely resistant to water and dust
- ✓ Aluminum vandal-proof housing with scratch-resistant textured lacquer
- ✓ Energy efficient adjustable white led lights
- ✓ Highly resistant stainless steel push buttons tested for 1,000,000 pushes and more
- ✓ Easy installation and configuration
- ✓ Easy programming of up to 100 user codes
- ✓ Smart heating element guarantees frost-free use
- ✓ Tested from -22°F to 185°F
- ✓ Adjustable time range between pulse and timer mode (100ms - 99s)
- ✓ Voltage: 10 up to 26 V AC/DC
- ✓ Current: 1.0 A (with heating) - Pmax= 13,5W (with max heating)
- ✓ 2 integrated switching relays: 2 x NO - 2 x NC - 2 x COM (Max. 2A, 60W, 26V AC/DC)
- ✓ 6-1/2ft connection cable included

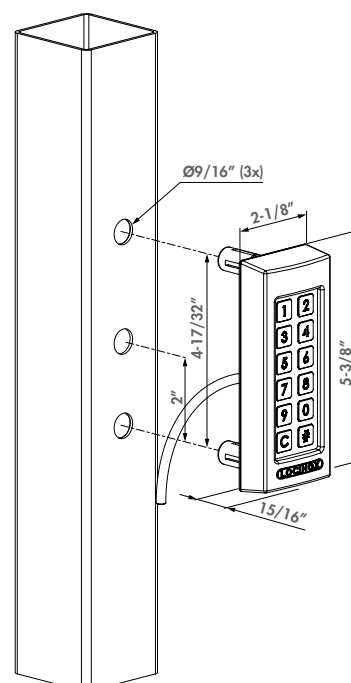

#### Compatible products



MODULEC-SA  
P. 29



MODULEC-SH  
P. 29



LIKQ U2  
P. 69



#### Order code

**SLIMSTONE-2-** Sturdy, frost-free and weather resistant keypad with 2 integrated relays

#### Electrical accessories



DVK-HD  
P. 45



DVK  
P. 44



2005  
P. 45



PB-1  
P. 44

#### Recommended power supplies



AC-TRANS-12V-25W  
P. 45



DC-POWER-12V-20W  
P. 46




## Electric strike for surface mounted locks

SE (Patented)

Electric strike for swing gates. Equipped with a double blocking system which will resist to up to 1000 lbs of pulling force. The deadbolt receiver has been reinforced with stainless steel, making it more robust and extremely strong. The ideal solution for your access control. SE is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

### Specifications

- ✓ Type SE.E: Emissa - Fail Close
- ✓ Type SE.R: Ruptura - Fail Open
- ✓ Deadbolt receiver reinforced and in stainless steel
- ✓ For profiles 2" and larger
- ✓ Voltage: 12V AC/DC
- ✓ Current Emissa: 1A
- ✓ Current Ruptura: 1.5A
- ✓ Water resistant & weatherproof
- ✓ Pressure resistance on self-latching bolt: 1000 lbs

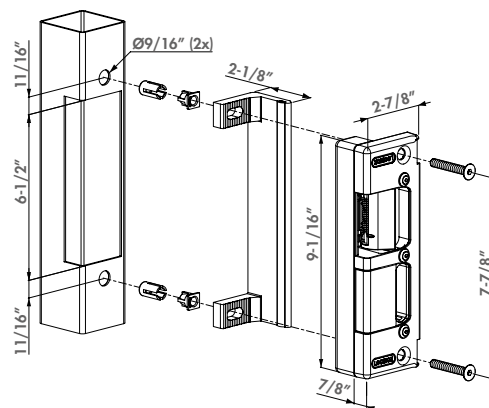

### Compatible locks



### Order codes


- SE-E** Electric strike, Emissa, Fail Close  
**SE-R** Electric strike, Ruptura, Fail Open



## Electric strike for mortise locks

SEH (Patented)

Electric strike for swing gates using our Hybrid Mortise locks. The strike is equipped with a double blocking system which supports 1000 lb pulling force. This keep is extremely strong and the ideal solution for your access control installations. The electric strike is available in a Fail Secure or Fail Safe model. Latch gap: 1". SEH is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

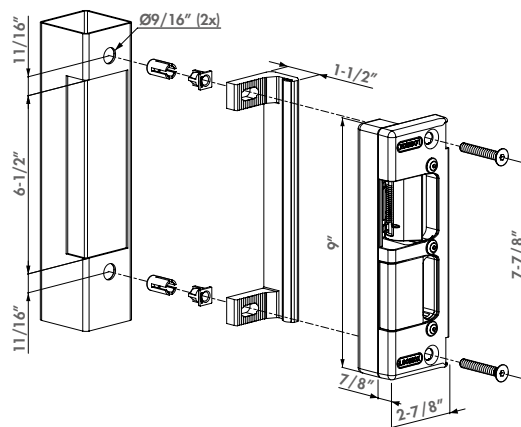

### Specifications

- ✓ Type SEH.E: Emissa - Fail Close
- ✓ Type SEH.R: Ruptura - Fail Open
- ✓ Easy left or right hand changing
- ✓ For profiles 2" and larger
- ✓ Voltage: 12V AC/DC
- ✓ Current Emissa: 1A
- ✓ Current Ruptura: 1.5A
- ✓ Water resistant & weatherproof
- ✓ Pressure resistance on self-latching bolt: 1000 lbs

### Compatible locks



### Order codes

- SEH-E** Electric strike, Emissa, Fail Close for H-Metal and H-Wood  
**SEH-R** Electric strike, Ruptura, Fail Open for H-Metal and H-Wood

**H-METAL**  
P. 83

**H-METAL-WB**  
P. 84

**H-WOOD**  
P. 89





**24h  
SHIPPING**

#### Stop plate color options



6005

7016

9005

24h  
SHIPPING


#### Specifications

- ✓ Tested up to 500 000 movements
- ✓ Fast and easy fixation with Quick-Fix
- ✓ 660 lbs. holding force on the latch bolt
- ✓ Same drilling pattern as SA, SH and SM keeps
- ✓ Easy left or right hand changing
- ✓ Corrosion-resistant: black anodized housing
- ✓ Adjustable for profiles: 1-1/2" to 2-1/2"
- ✓ Voltage: 12V-24V AC/DC
- ✓ Consumption: 12V - 1,25A / 24V - 0,62A
- ✓ Power: 15W

#### Order code

**MODULEC-SA-E** Fail Close for surface mounted gate locks, 12-24V AC/DC

**MODULEC-SA-R** Fail Open for surface mounted gate locks, 12-24V AC/DC

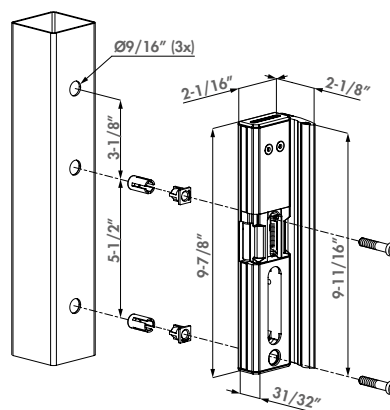

#### Compatible locks



**LAKQ U2**  
P. 59



**LUKY J5**  
P. 61



**LDKZ D1**  
P. 65



**LAKQ H2**  
P. 71



**24h  
SHIPPING**

#### Stop plate color options



6005

7016

9005

24h  
SHIPPING

#### Specifications

- ✓ Tested up to 500 000 movements
- ✓ 660 lbs. holding force on the latch bolt
- ✓ Fast and easy installation with Quick-Fix
- ✓ Same drilling pattern as SA, SH and SM keeps
- ✓ Easy left or right hand changing
- ✓ Corrosion-resistant: black anodized housing
- ✓ Adjustable for profiles: 1-1/2" to 2-1/2"
- ✓ Voltage: 12V-24V AC/DC
- ✓ Consumption: 12V - 1,25A / 24V - 0,62A
- ✓ Power: 15W

#### Order code


**MODULEC-SH-E** Fail Close for surface mounted gate locks, 12-24V AC/DC

**MODULEC-SH-R** Fail Open for surface mounted gate locks, 12-24V AC/DC

### Surface mounted electric strike with security mushroom

MODULEC-SH (Patent pending)

Replace your SHKL keep with an electrical surface mounted keep with Fail Close / Fail Open functionality. Easy to install thanks to the patented Quick-Fix. For 12V-24V and AC/DC. Modulec-SH is available in two versions: E (Emissa - Fail Close) and R (Rupture - Fail Open).

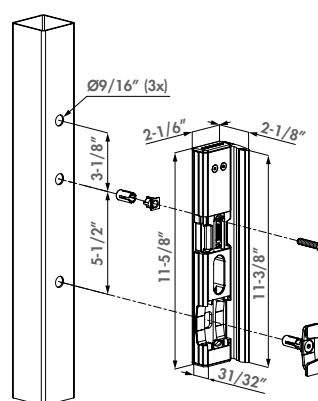

#### Compatible locks



**LAKQ U2**  
P. 59



**LUKY J5**  
P. 61



**LDKZ D1**  
P. 65



**LAKQ H2**  
P. 71

# BUILT-IN MAGNETIC LOCKS

## A FULL CONCEPT FOR SWING GATES

### MAGUNIT

High quality insert magnetic lock with guaranteed holding force and long durability. 500h salt spray resistant.

### N-LINE-B-MAG

Aesthetic, adjustable and powder coated finishing profile for swing gates preventing people to stumble against protruding parts.

### 3006PULL

Elegant powder coated handle for easy opening and closing of the gate.

#### TIP

- Save time and order the all-in-one **N-LINE-B-MAG KIT**
- Make your gate self-closing with the powerful **VERTICLOSE-2** gate closer



Built-in magnetic lock

## B FULL CONCEPT FOR SLIDING GATES



### MAGUNIT

High quality insert magnetic lock with guaranteed holding force and long durability. 500h salt spray resistant.

### N-LINE-S-MAG

Aesthetic, adjustable and powder coated finishing profile for sliding gates preventing people to stumble against protruding parts.

### 3006PULL

Elegant powder coated handle for easy opening and closing of the gate.

#### TIP

- Add access control to your gate with the strong, frost-free and watertight **SLIMSTONE** keypad (IP68)





## Integrated magnet lock for swing gates

B-MAG-

Thanks to its assembly in the pole, this magnet lock can be installed invisibly and aesthetically, whilst maximal passage space is maintained. A quick assembly is done with Quick-Fix. It has a guaranteed tensile strength of 550 lbs and resists to extreme weather conditions. The rubber bumpers prevent shaking of the gate, and damage to the gate and its accessories in case of harsh handling, and the flexible assembly of the armature plate guarantees a good closing even if the gate isn't perfectly aligned.




### Color options

ZILV

9005

### Specifications

- ✓ Guaranteed holding force tested on every Maglock
- ✓ 500h salt spray resistant! SGS Certified (ISO 9227)
- ✓ Special two-layer protective coating developed for outdoor use
- ✓ Anti-residual magnetism kick-off system
- ✓ Minimal pulling force: 2500N (600 lbs)
- ✓ Current: 460mA/12V or 230mA/24V

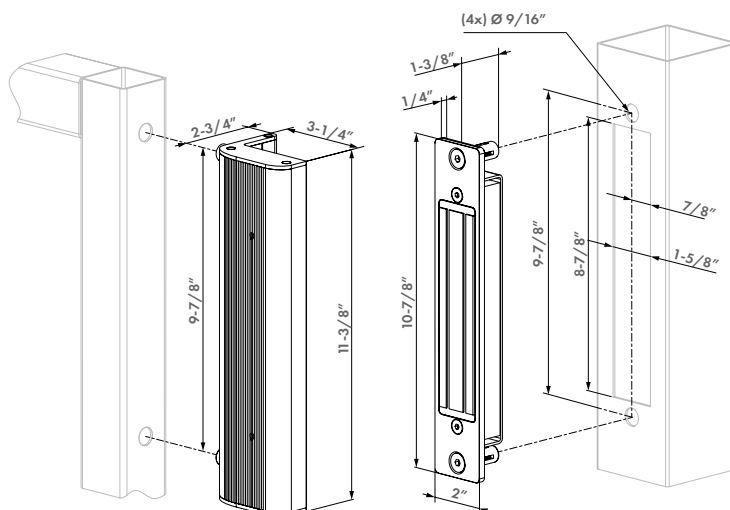

### Order codes

**B-MAG-** Integrated magnet and bolt-on anchorplate for swing gates



### Recommended products



**SLIMSTONE-**  
P. 26



**PB-1**  
P. 44



**DVK-HD**  
P. 45



**DC-ACCESS-12V-20W**  
P. 46



**DC-POWER-12V-20W**  
P. 46



**DC-POWER-24V-25W**  
P. 46



## Set with magnet and anchorplate for N-LINE (B or S)-MAG profiles

MAGUNIT-2500

Set with a MAG-2500 and anchorplate along with fittings for use with a N-LINE-B-MAG or N-LINE-S-MAG, 1 or more MAGUNITs can be mounted in the N-LINE profile.




### Specifications

- ✓ Guaranteed holding force tested on every Maglock
- ✓ 500h salt spray resistant! SGS Certified (ISO 9227)
- ✓ Special two-layer protective coating developed for outdoor use
- ✓ Anti-residual magnetism kick-off system
- ✓ Current: 460mA/12V or 230mA/24V
- ✓ Voltage: 12V / 24V DC
- ✓ Minimal pulling force: 2500N (600 lbs)

### Order codes

**MAGUNIT-2500** Magnet and anchorplate for N-LINE-B-MAG and N-LINE-S-MAG profiles

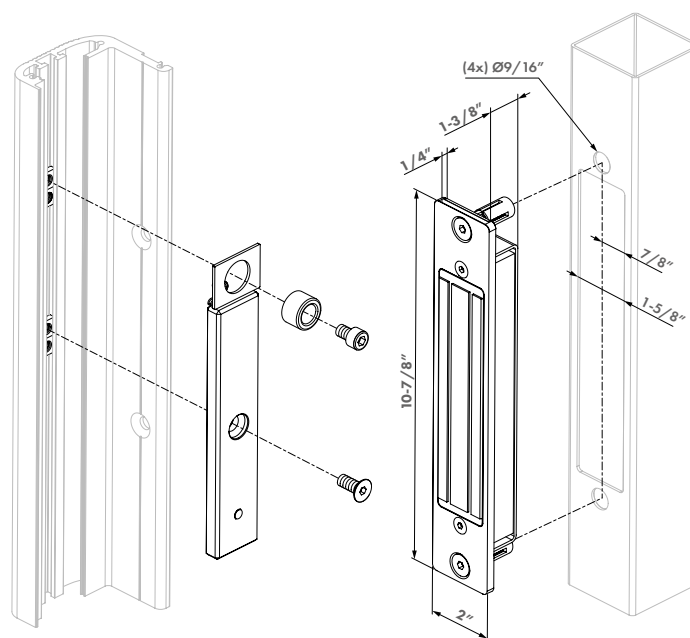

### Required products



N-LINE-B-MAG-  
P. 33



N-LINE-S-MAG-  
P. 33



### Color options

ZILV 9005

### Specifications

- ✓ Profile length: 78-3/4"
- ✓ Fast and easy fixation with Quick-Fix
- ✓ Powder coated aluminum housing
- ✓ Specially designed for exterior use

## Aluminum finishing profile for swing gates to combine with MAGUNIT

N-LINE-B-MAG-

Adjustable, powder coated aluminum design profile for aesthetic closing of swing gates along with 1 or more MAGUNIT-2500. Thanks to the integrated magnet and the armature plate, which are both integrated in the design profile, a safe and complete solution without any protruding components is guaranteed.




### Compatible magnet



MAGUNIT-2500

P. 32

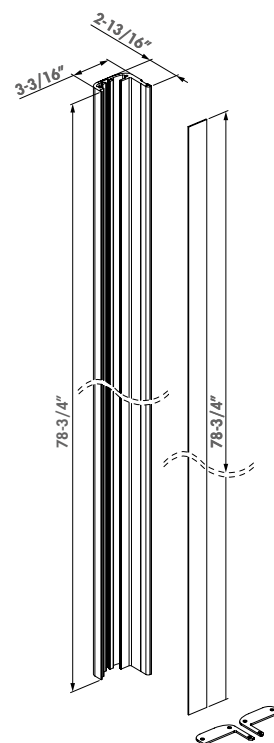

### Order codes

**N-LINE-B-MAG-** Aluminum finishing profile for MAGUNIT-2500



### Color options

ZILV 9005

### Specifications

- ✓ Profile length: 78-3/4"
- ✓ Fast and easy fixation with Quick-Fix
- ✓ Powder coated aluminum housing
- ✓ Specially designed for exterior use

## Aluminum finishing profile for sliding gates to combine with MAGUNIT

N-LINE-S-MAG-

Adjustable, powder coated aluminum design profile for aesthetic closing of sliding gates along with 1 or more MAGUNIT-2500. Thanks to the integrated magnet and the armature plate, which are both integrated in the design profile, a safe and complete solution without any protruding components is guaranteed.




### Compatible magnet



MAGUNIT-2500

P. 32

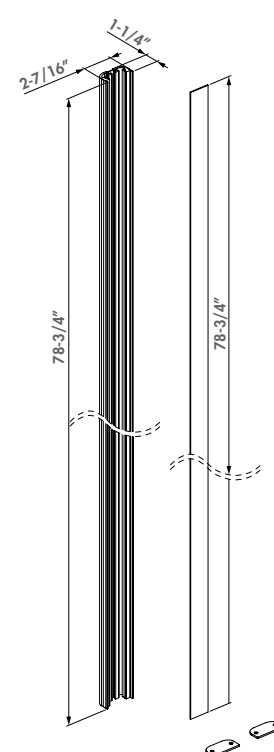

### Order codes

**N-LINE-S-MAG-** Aluminum finishing profile for MAGUNIT-2500



## Set with N-LINE-B-MAG & 2x MAGUNIT

### N-LINE-B-MAG-KIT-

Electromagnetic set for swing gates for fixing to the gate frame. The set consists of two MAGUNIT and an aesthetic design profile. Available in ZILV and RAL9005.




### Specifications

- ✓ Includes 2 integrated magnets equipped with Quick-Fix mounting (MAGUNIT-2500)
- ✓ Including aluminum filling profile with Quick-Fix mounting (N-LINE-B-MAG profile)
- ✓ Profile length: 78-3/4"
- ✓ Including 2 aluminum covers for an aesthetical finishing on top and bottom
- ✓ Specially designed for exterior use
- ✓ Voltage: 12V / 24V DC
- ✓ Current: 460mA / 12V or 230mA / 24V

### Order codes

#### N-LINE-B-MAG-KIT-

Set with N-LINE-B-MAG profile and 2x MAGUNIT-2500

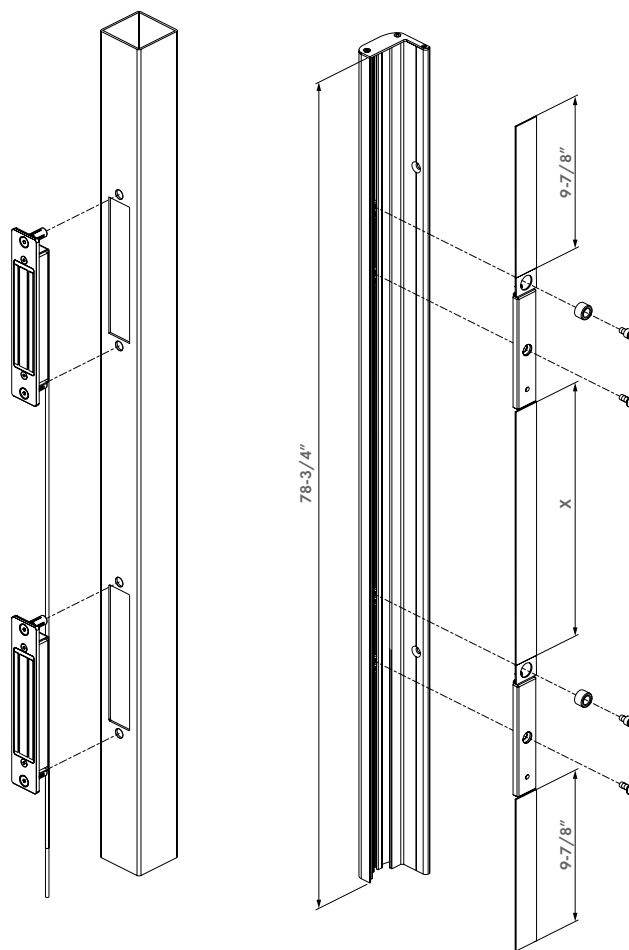

### Kit includes



N-LINE-B-MAG-  
P. 33



MAGUNIT-2500  
P. 32







## Integrated magnet lock for sliding gates

S-MAG-

S-MAG is the perfect product to lock any type of sliding gate. It has a guaranteed tensile strength of 600 lbs and resists extreme weather conditions. The rubber bumpers prevent shaking of the gate, and damage to the gate and its accessories in case of harsh handling, and the flexible assembly of the armature plate guarantees a normal closing even if the gate isn't perfectly aligned.

**24h  
SHIPPING**




### Color options



### Specifications

- ✓ Guaranteed holding force tested on every Maglock
- ✓ 500h salt spray resistant! SGS Certified (ISO 9227)
- ✓ Special two-layer protective coating developed for outdoor use
- ✓ Anti-residual magnetism kick-off system
- ✓ Minimal pulling force: 2500N (600 lbs)
- ✓ Current: 460mA/12V or 230mA/24V

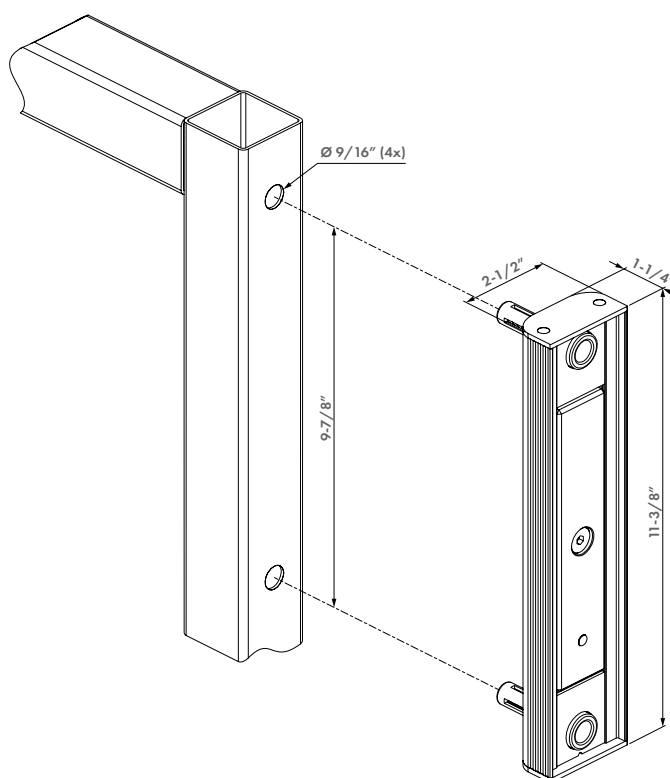

### Order codes

**S-MAG-** Integrated magnet and bolt-on anchorplate for sliding gates,  
550lbs pulling force **24h  
SHIPPING**



### Recommended products



**SLIMSTONE-**  
P. 26



**PB-1**  
P. 44



**DVK-HD**  
P. 45



**DC-ACCESS-12V-20W**  
P. 46



**DC-POWER-12V-20W**  
P. 46



**DC-POWER-24V-25W**  
P. 46

# SURFACE MOUNTED MAGNETIC LOCKS

## FULL CONCEPT FOR SWING GATES



### MAGMAG

High quality surface mounted magnetic lock with guaranteed holding force and long durability. 500h salt spray resistant

### N-LINE-MAG

Aesthetic, adjustable and powder coated finishing profile for swing gates preventing people to stumble against protruding parts

### 3006PULL

Elegant powder coated handle for easy opening and closing of the gate

#### TIP

- Save time and order the all-in-one **N-LINE-MAG KIT**
- Add access control to your gate with the strong, frost-free and watertight **SLIMSTONE** keypad (IP68)
- Make your gate self-closing with the aesthetic **MAMMOTH** gate closer



Electromagnetic lock with handles







## Surface mounted electromagnetic lock with integrated pull/push handles

MAG

Innovative electromagnetic lock for access control. Available in 2 versions. MAG2500 with 600 lbs and MAG5000 with 1200 lbs pulling force. The aluminum powder coated housing with integrated design handles gives your access control gate that extra touch. Stop losing precious time with welding boxes; drilling 7 holes does the job. The Quick-Fix enables a fast and strong fixing. A two layer, protective coating guarantees that our electromagnetic locks are ready for years of worry free use outside.

**24h**  
SHIPPING



### Color options



**6005**




### Specifications

- ✓ 500h salt spray resistant! SGS Certified (ISO 9227)
- ✓ Guaranteed holding force tested on every Maglock
- ✓ Special two-layer protective coating developed for outdoor use
- ✓ Powder coated aluminum housing
- ✓ Anti-residual magnetism kick-off system
- ✓ Raised edge on the magnet housing makes it impossible to put a crowbar between the magnet and the armature plate
- ✓ Fast and easy fixing by means of 5 holes with Quick-Fix
- ✓ Voltage: 12V / 24V DC
- ✓ Current: 460mA / 12V or 230mA / 24V

### Order codes

- MAG-2500** For square posts and gate profiles of 1-9/16" till 3-1/8", 600 lbs pulling force **24h SHIPPING**
- MAG-5000** For square posts and gate profiles of 1-9/16" till 3-1/8", 1200 lbs pulling force **24h SHIPPING**

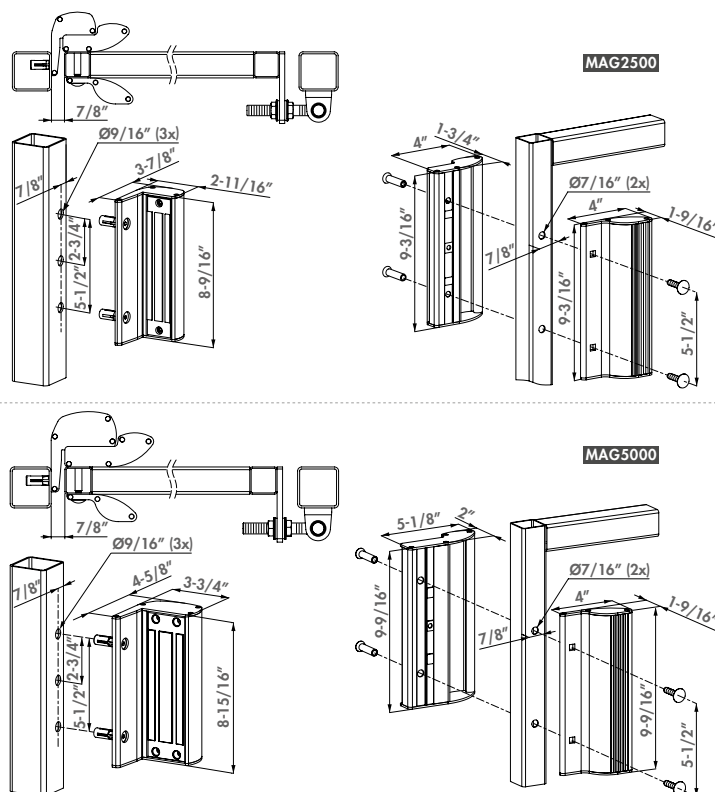

### Recommended products



**N-LINE-MAG-2500**  
P. 40



**PB-1**  
P. 44



**DVK-HD**  
P. 45



**DC-ACCESS-12V-20W**  
P. 46



**DC-POWER-24V-25W**  
P. 46

## Surface mounted electromagnetic lock without integrated handles

### MAGMAG



**24h**  
SHIPPING



#### Color options




#### Specifications



- ✓ 500h salt spray resistant! SGS Certified (ISO 9227)
- ✓ Guaranteed holding force tested on every Maglock
- ✓ Special two-layer protective coating developed for outdoor use
- ✓ Powder coated aluminum housing
- ✓ Anti-residual magnetism kick-off system
- ✓ Raised edge on the magnet housing makes it impossible to put a crowbar between the magnet and the armature plate
- ✓ Fast and easy fixing by means of 5 holes with Quick-Fix
- ✓ Voltage: 12V / 24V DC
- ✓ Current: 460mA / 12V or 230mA / 24V

#### Order codes


<b>MAGMAG-2500</b>	For square posts and gate profiles of 1-9/16" till 3-1/8", 600 lbs pulling force <b>24h</b> SHIPPING
<b>MAGMAG-5000</b>	For square posts and gate profiles of 1-9/16" till 3-1/8", 1200 lbs pulling force <b>24h</b> SHIPPING

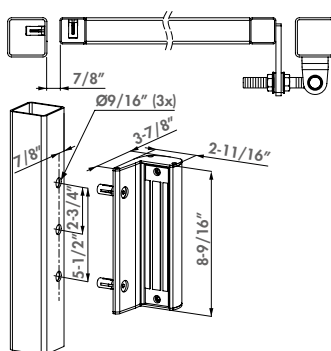

**MAGMAG2500**



**MAGMAG5000**



#### Recommended products



**N-LINE-MAG-2500**  
P. 40



**PB-1**  
P. 44



**DVK-HD**  
P. 45



**DC-ACCESS-12V-20W**  
P. 46



**DC-POWER-24V-25W**  
P. 46



### Color options

ZILV 9005

### Specifications

- ✓ Profile length: 78-3/4"
- ✓ Delivered with self drilling screws, compatible with Quick-Fix
- ✓ 2 plastic cover caps and 6 in-between caps included
- ✓ Separate adaptor needed with use of 3006PULL handle, delivered with 3006PULL

### Order code

**N-LINE-MAG-2500**



Aluminium finishing profile for MAG-2500 & MAGMAG2500 **24h SHIPPING**



## Profile for MAG2500 and MAGMAG2500 magnetic locks

### N-LINE MAG

Adjustable, powder coated aluminum design profile for aesthetic closing of the gaps between 2 MAG2500 or MAGMAG2500 magnetic locks. To be fixed to the post. Prevents passersby to bump into the protruding parts of the magnetic lock.

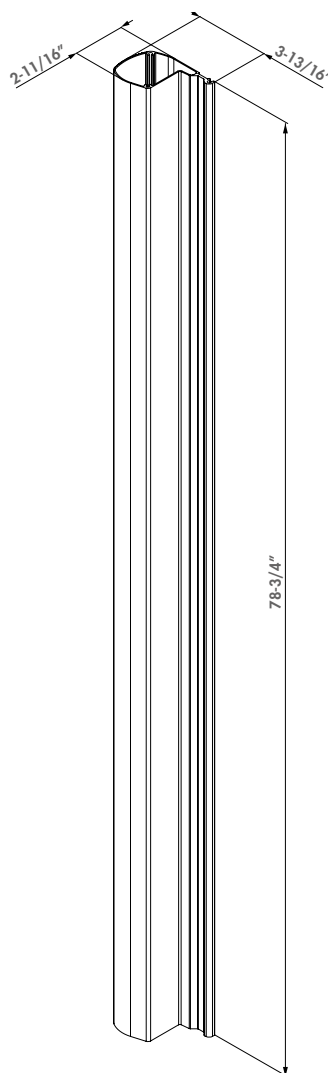

### Recommended magnetic locks



MAG-2500  
P. 38

MAGMAG-2500  
P. 39



## Set with N-LINE MAG profile, 2 x MAGMAG2500

### N-LINE MAG KIT-2500

Set with N-LINE MAG profile and 2x MAGMAG2500 and 3006PULL handle. 3006PULL handle is included to finish your gate. Aesthetic solution which prevents passersby to stumble against the parts of the magnetic lock.



#### Color options

ZILV 9005


#### Specifications

- ✓ Adjustable aluminum design profile to mount above, below and in between the magnets
- ✓ Profile length: 78-3/4"
- ✓ Delivered with self drilling screws, compatible with Quick-Fix
- ✓ 2 plastic cover caps and 6 in-between caps included
- ✓ Aluminum 3006PULL handle included
- ✓ Delivered with 2x MAGMAG2500
- ✓ Voltage: 12V / 24V DC
- ✓ Current: 460mA / 12V or 230mA / 24V

#### Order code

##### N-LINE MAG KIT-2500

Set with N-LINE MAG profile and 2x MAGMAG2500 and 3006PULL handle

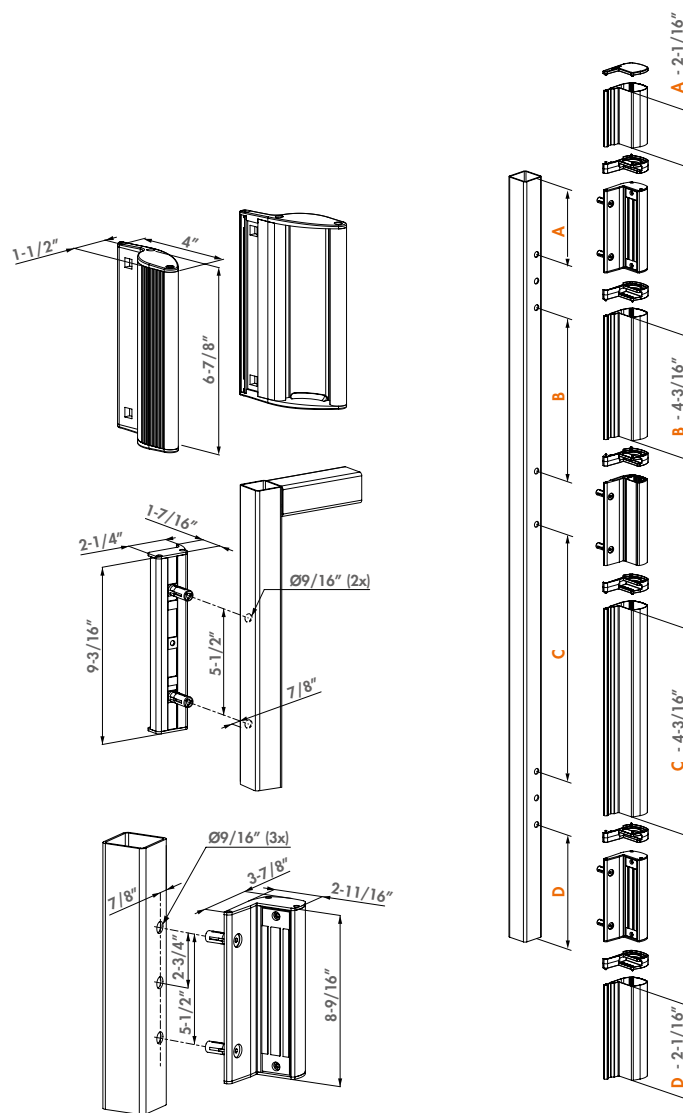

#### Kit includes



N-LINE-MAG-2500  
P. 40



MAGMAG-2500  
P. 39



3006PULL  
P. 161



## Electrical drop bolt

ELECTRADROP (Patented)

Electrical 24V drop bolt with 4-1/2" throw for safe locking of automated swing gates. By securing your gate with a drop bolt you disburden the electric gate motors.

**24h  
SHIPPING**



### Color options




### Specifications

- ✓ Vandal proof, powder coated aluminum housing
- ✓ To be connected to the warning light on automated gates (min 3 sec prewarning signal) or directly on the gate automation
- ✓ Mechanical release possible (by key) in case of emergency
- ✓ Fitted with relay for drop bolt detection
- ✓ Obstacle detection with automatic stop of the drop bolt in case of a pressure exceeding 40 lbs
- ✓ Consumption: 25 W / Standby: 0,2 W
- ✓ 16-1/2 ft cable included
- ✓ Included: 3012-37-STD-VSZ cylinder
- ✓ To connect to a Locinox DC-POWER-24V-25W power supply

### Order code

**ELECTRADROP** For profiles 1-1/2" x 1-1/2" or more

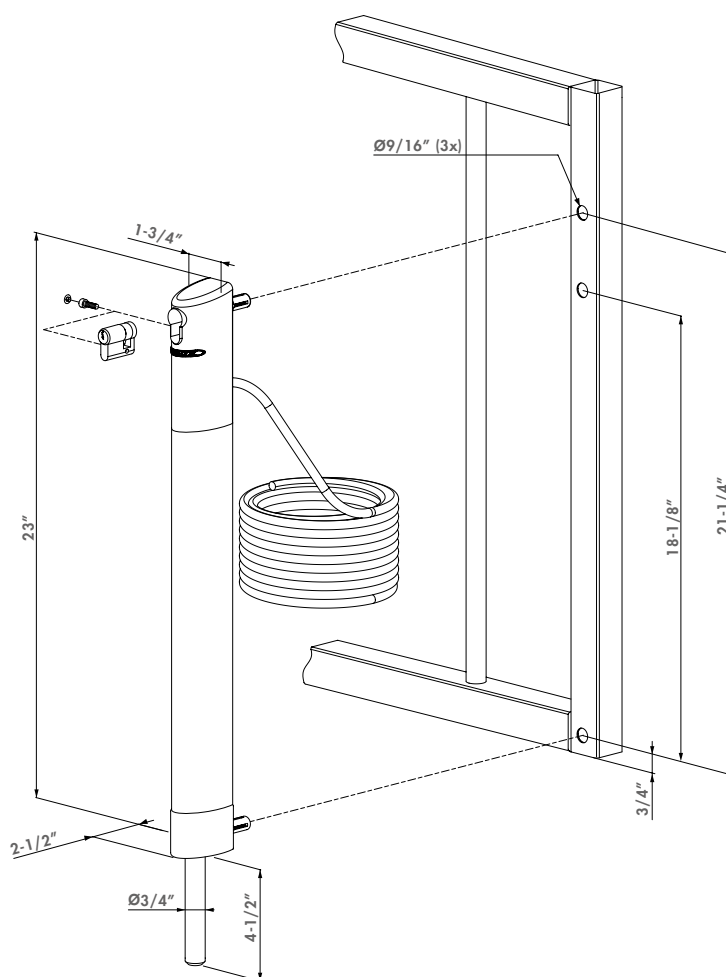

### Compatible ground stop & power supply



OGS  
P. 142



DC-POWER-24V-25W  
P. 46

## Design led-lighting for gates

### TRICONE

Plug & Play design led lighting for your fences & gates. Gives your gate an aesthetical look with minimal power consumption! The Quick-Fix provides a fast and strong fixing on your fencing.



**24h  
SHIPPING**




#### Color options



#### Specifications

- ✓ Fast and easy installation with Quick-Fix
- ✓ Aluminum housing with plastic (POM) cable guiding
- ✓ 3 white High-Flux led Lights
- ✓  $\pm 140^\circ$  beam angle
- ✓ Life expectancy: 50,000 hours
- ✓ 300 lux (illuminance)
- ✓ Power:  $\pm 1W$  (with 12V DC)
- ✓ 12V AC or DC (max. 18V DC or peak AC)
- ✓ Minimum power consumption and long lasting performance
- ✓ Resin encapsulated print circuit board for weather resistance
- ✓ Power up to 20 Tricone with 1 Locinox AC transformer or up to 15 with the DC power
- ✓ IP54

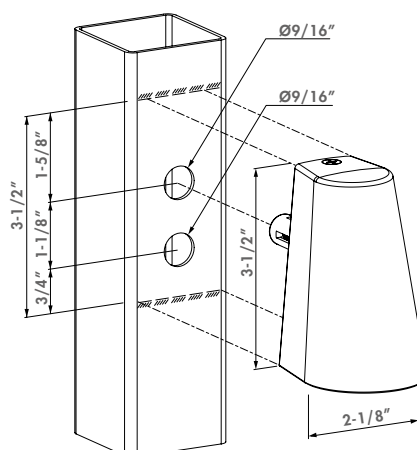

#### Order code

**TRICONE** Design led-lighting for gates with Quick-Fix



#### Cable guiding



**DVK-HD**  
P. 45



**DVK**  
P. 44



**2005**  
P. 45



**PB-1**  
P. 44

#### Recommended power supplies



**AC-TRANS-12V-25W**  
P. 45



**DC-POWER-12V-20W**  
P. 46



**DC-ACCESS-12V-20W**  
P. 46





**24h  
SHIPPING**

### Housing color options




### Specifications

- ✓ Waterproof transformer box - IP66
- ✓ Powder coated aluminum housing
- ✓ DIN-rail mount: 3-3/8" (5 units)
- ✓ Supplied with 2 gland nuts M20 and 2 stop plugs M16
- ✓ Designed with heat-dissipation fins at the back

## Powerbox - Transformer housing

PB-1

Aluminum powder coated transformer box with Quick-Fix for strong and easy installation. IP66

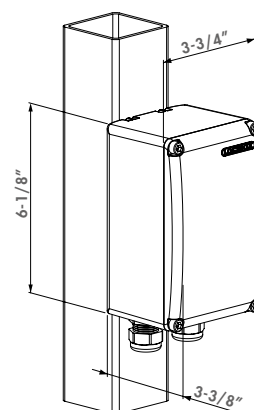

### Housing for power supplies and timer



AC-TRANS-12V-25W  
P. 45



DC-ACCESS-12V-20W  
P. 46



DC-POWER-12V-20W  
P. 46



DC-POWER-24V-25W  
P. 46

### Order code

**PB-1** Transformer housing with DIN-rail and Quick-Fix fixing



**24h  
SHIPPING**

### Color options




### Specifications

- ✓ Stainless steel guiding cable for electrical wire
- ✓ Length of the cable: 17-5/8"
- ✓ Supplied with 8 self tapping screws
- ✓ Inner diameter: Ø13/32"

## Cable guide w/flex ss conduit

DVK

Stainless steel guiding cable to protect your electrical wires in an outside environment.

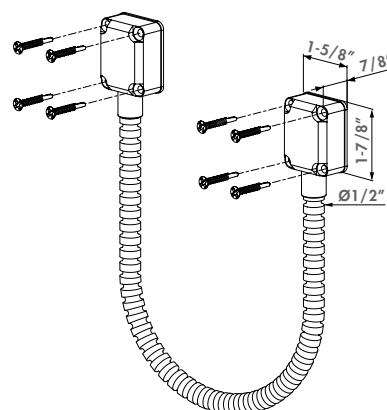

### Recommended cable



### Order code

**DVK** Reinforced stainless steel flex cable, 17-3/4" Long

**2005**  
P. 45



**24h  
SHIPPING**

### Color options



### Specifications

- ✓ Vandal-proof, stainless steel, braided guiding cable
- ✓ Available with 17-3/4" or 25-9/16" braided cable
- ✓ Protects electrical wiring against vandalism, moist, dirt and vermin
- ✓ Strong fixation by means of 8 self-tapping stainless steel screws
- ✓ Cable entry: aluminum housing
- ✓ Inner diameter: Ø3/8"

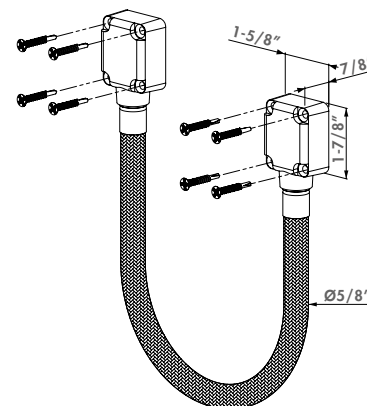

### Recommended cable


**2005**

P. 45

### Order codes

**DVK-HD-450** Reinforced stainless steel flex cable, 17-3/4" Long

**DVK-HD-650** Reinforced stainless steel flex cable, 25-9/16" Long

**24h  
SHIPPING**

### Specifications

- ✓ Length of the wire: 16-1/2ft
- ✓ 2 x 21 ga (0.75 mm)
- ✓ Water resistant & weatherproof
- ✓ Tested at 500.000 bendings
- ✓ Kink resistant

### Order code

**2005** Electrical cable 196" - 2 x 0,75 mm<sup>2</sup>

## Electrical wire

2005

Electrical cable; very flexible and weatherproof. Resists breaking and shorting out. Lasts longer than standard home wiring.



## Safety transformer 12V AC

AC-TRANS-12V-25W

Safety Transformer 12V - 25W

### Specifications

- ✓ Mounting on DIN-rail or directly
- ✓ Power: 25W
- ✓ Primary voltage: 230V AC - Secondary voltage 12V AC
- ✓ Aluminum housing
- ✓ Robust control module: encapsulated for superior humidity resistance

### Order code

**AC-TRANS-12V-25W** Transformer 12V AC - 25W



## All-in one 12V DC Access Module with integrated timer

DC-ACCESS-12V-20W

All-in-one, Plug&Play Access Module (230V AC). Including power supply and integrated timer with easy to read display and easy to operate: time range (1 to 99s) of switched state controlled by push buttons. A 12V DC Fail Open or Fail Close device can be easily connected to the module.

### Specifications

- ✓ Mounting on DIN-rail or directly
- ✓ Time range (1 to 99s) of switched state controlled by push buttons
- ✓ Set time clearly visible on display
- ✓ Robust control module: encapsulated for superior humidity resistance
- ✓ Input voltage: 110V AC / Maximum output power: 25W

### Order code

**DC-ACCESS-12V-20W** All-in one 12V DC Access Module with integrated timer



## Safety power supply 12V and 13V DC

DC-POWER-12V-20W

Safety power supply 12V DC - 20W

### Specifications

- ✓ Mounting on DIN-rail or directly
- ✓ Power: 20W
- ✓ Primary voltage: 230V
- ✓ Secondary voltage: 12V and 13V DC
- ✓ Aluminum housing
- ✓ Robust control module: encapsulated for superior humidity resistance

### Order code

**DC-POWER-12V-20W** Power supply 12 V DC - 20 W



**24h  
SHIPPING**

## Safety power supply 24V and 25V DC

DC-POWER-24V-25W

Safety power supply 24V DC - 25W

### Specifications

- ✓ Mounting on DIN-rail or directly
- ✓ Power: 25W
- ✓ Primary voltage: 230V
- ✓ Secondary voltage: 24V and 25V DC
- ✓ Aluminum housing
- ✓ Robust control module: encapsulated for superior humidity resistance

### Order code

**DC-POWER-24V-25W** Power supply 24-25V DC - 25W






## Position detection set for gates - Stand alone

### GATESWITCH

Multi-purpose position detection set, consisting of a magnet and magnetic switch. This set can be easily connected to any electrical system like your access control or burglary system. The distance between the magnets can be easily changed by means of an adjustable magnet and included filler plates.

#### Specifications

- ✓ Possibility to activate led light when the sensor detects the magnet (requires 12V DC at the gate)
- ✓ Operates with Normally Open (N/O) or Normally Closed (N/C) contacts
- ✓ Required distance between the gate and the post is minimum 3/8" and maximum 2"
- ✓ Easy adjustment of distance between sensor and magnet by means of filling plates (fillers) and screwable magnet

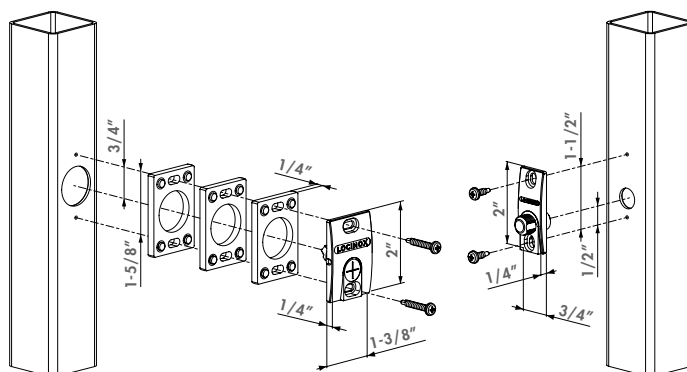

#### Recommended power supplies



DC-POWER-12V-20W  
P. 46




DC-ACCESS-12V-20W  
P. 46

#### Order code

**GATESWITCH** For a min. gap of 3/8" and max. 2" between post and gate



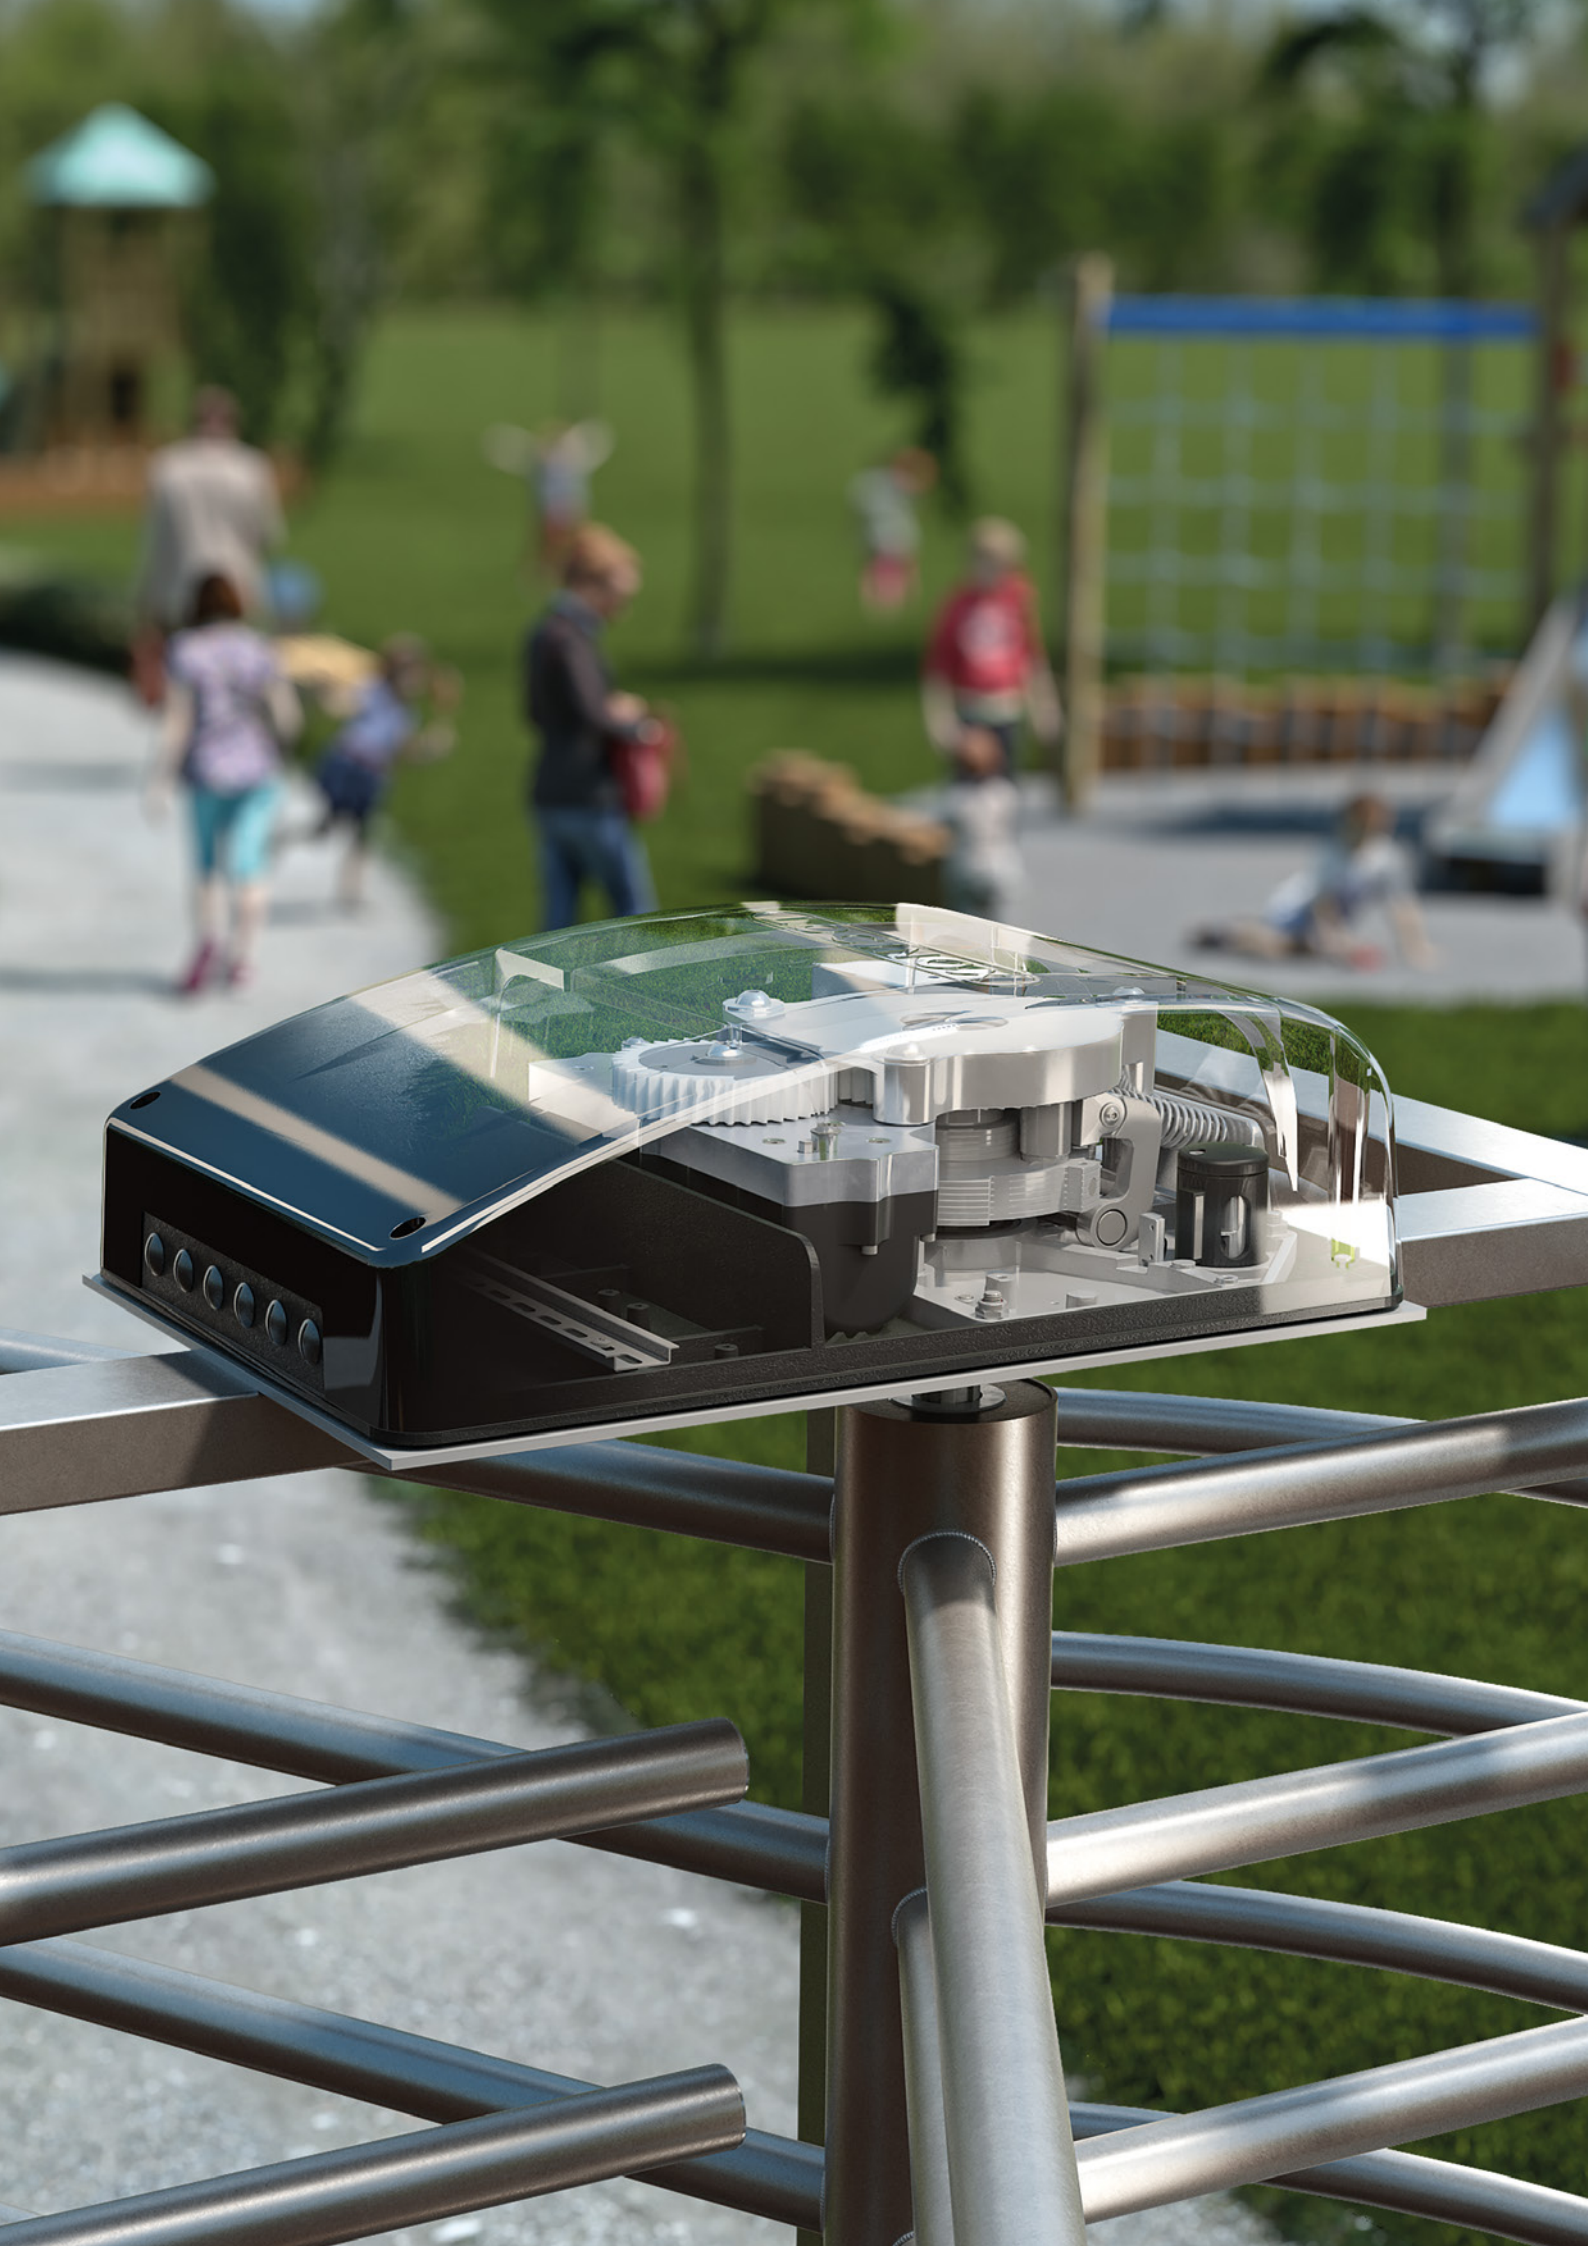

# Turnstiles

---


The Locinox (electro)mechanical control unit allows you to easily create a maintenance free and high quality turnstile. You have an (electro)mechanical unit at your disposal with which you can match the design of your turnstile to the design of your fencing!

---



52 Turnitec

53 Access control modules






# (ELECTRO)MECHANIC CONTROL UNIT FOR TURNSTILES

## THE COMPLETE TURNITEC SOLUTION

- |          |   |       |
|----------|---|-------|
| <b>1</b> | <b>TT-BM3S</b><br>The essential module for any turnstile  | p. 53 |
| <b>2</b> | <b>TT-DM3</b><br>Recommended hydraulic damping mechanism<br>for extra user comfort                      | p. 53 |
| <b>3</b> | <b>TT-FO31/TT-FC31</b><br>Fail Open or Fail Close electromechanical<br>module for access control        | p. 54 |
| <b>4</b> | <b>DC-POWER-24V-25W</b><br>Robust power supply with aluminum housing                                    | p. 46 |
| <b>5</b> | <b>TT-CL2</b><br>Counter and passing light signal<br>module for visitor flow management                 | p. 55 |
| <b>6</b> | <b>TT-BSP/TT-SSP</b><br>Welding plate for fast and perfect<br>installation of Turnitec on any turnstile | p. 53 |
| <b>7</b> | <b>TT-SAH</b><br>Recommended for perfect connection<br>of the basic module with the spline axle         | p. 55 |
| <b>8</b> | <b>TT-PIVOT</b><br>Lower bearing for a smooth operation   | p. 55 |

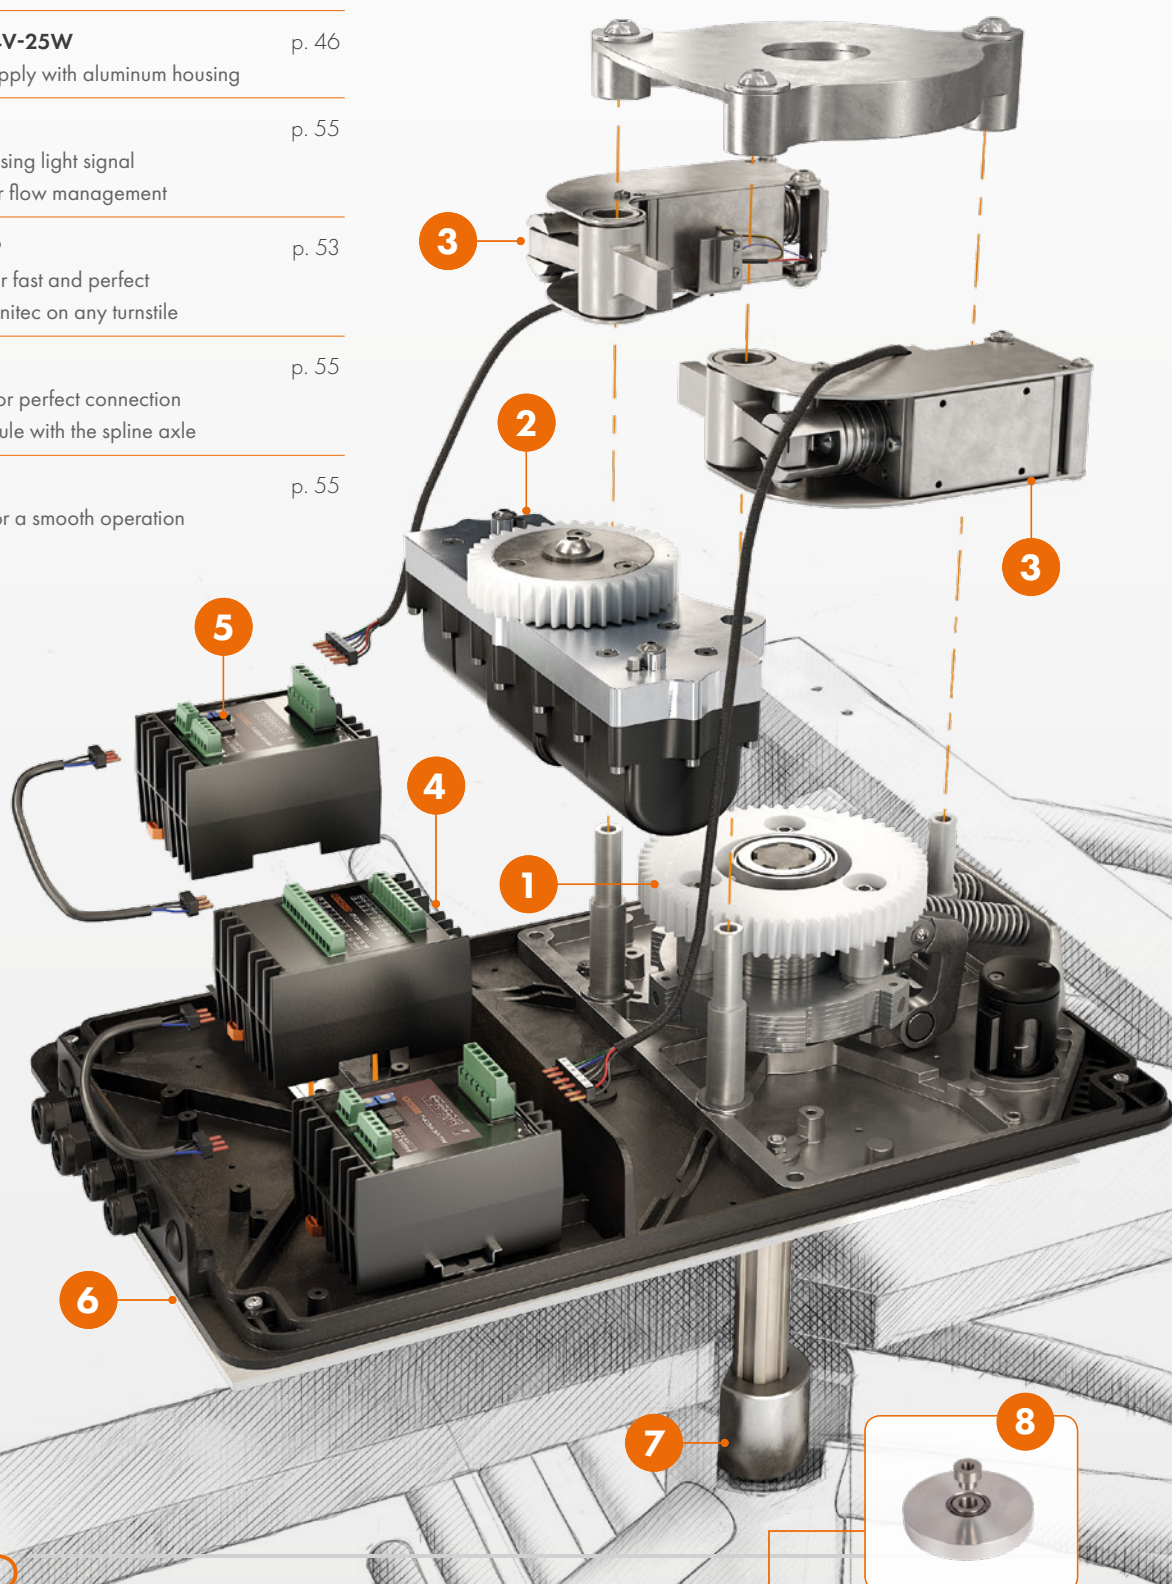

## USER ADVANTAGES

### SAVE MONEY

No security guards or ticket takers required

### MONITOR AND CONTROL ALL TRAFFIC

You own the place

### NO UNAUTHORIZED PEOPLE ON SITE

Keep everyone safe

### REDUCE CRIME, BURGLARY AND THEFT

Ensures everyone's comfort and peace of mind

### HIGHLY RELIABLE

Tested on 1 million movements

# 10 REASONS TO LOVE THE TURNITEC

## ADVANTAGES FOR YOU

### 100% FLEXIBILITY AND MODULARITY

Fits any need, build your own Turnitec

### ONE PERSON AT A TIME

Prevent tailgating  
(individuals entering right behind someone else)

### EXTREME WEATHERPROOF

A perfect functioning, anywhere in the world

### LOW ECOLOGICAL FOOTPRINT

Thanks to the energy-efficient power consumption

### CONTROL ONE OR BOTH FLOW DIRECTIONS

## POPULAR APPLICATIONS



PARKING SITES



**ELECTROMECHANICAL:**  
ACCESS CONTROL  
FOR EXTRA SECURITY



AIRPORTS



PUBLIC AREAS



**MECHANICAL:**  
FREE ENTRY AND  
EXIT OR LOCKED



SCHOOLS



INDUSTRY



COMMERCIAL



PUBLIC  
TRANSPORT



BIKE PARKS



PRISONS



MILITARY  
INSTALLATIONS



FESTIVALS



AIRPORTS  
& PORTS



POWER PLANTS



PARKING SITES



AMUSEMENT  
PARKS



EDUCATIONAL  
FACILITIES



PLAYGROUNDS



SPORTS  
STADIUMS





## Modular (electro)mechanical control unit for turnstiles

TURNITEC (Patented)

The Locinox (electro)mechanical control unit allows you to easily create a maintenance free and high quality turnstile. You can match the design of your turnstile to the design of your fencing! The Turnitec mechanism is applicable to any turnstile and a quick installation is guaranteed. Thanks to the 100% modular design you can adapt the mechanism to your customers' desires. A comfortable and safe operation is guaranteed by the optional damping system that is unaffected by temperature changes.

**24h  
SHIPPING**

### Compatible Turnitec modules



TT-BM3S  
P. 53



TT-BSP / TT-SSP  
P. 53



TT-DM3  
P. 53



TT-FO31  
P. 54



TT-FC31  
P. 54



TT-MM3S  
P. 54



TT-SAH  
P. 55



TT-PIVOT  
P. 55



TT-CL1  
P. 55



### Specifications

- ✓ 100% modular system: composition according customers' desires and expandable at any moment
- ✓ Optional interchangeable left/right mechanical or electromechanical modules (Fail Open or Fail Close)
- ✓ Automatic return to starting position (by means of industrial pressure springs) after every passage
- ✓ Anti-passback security (locking after a 60° rotation): prevents the simultaneous passing of 2 persons
- ✓ Very robust implementation and strong connection with the turnstile by a 1-3/8" diameter spline axle (length 12-3/4")
- ✓ Manufactured completely in stainless parts (stainless steel and aluminum)
- ✓ Optional welding plate in black or stainless steel enables an easy mounting on every turnstile
- ✓ Optional damping system guarantees smooth and gradual movements. Damping is continuous and unaffected by temperature changes (patented system)
- ✓ Possible to set signal duration
- ✓ IP55 housing protects the mechanism against water, dirt, wind, dust and vermin

### Order code

**TTEC-BM3S-FO31-FC31-DM3-CL1**

Full option Turnitec, Base mechanism + 1 Fail Open module + 1 Fail Close module + Hydraulic damper + 1 Counter & Light module

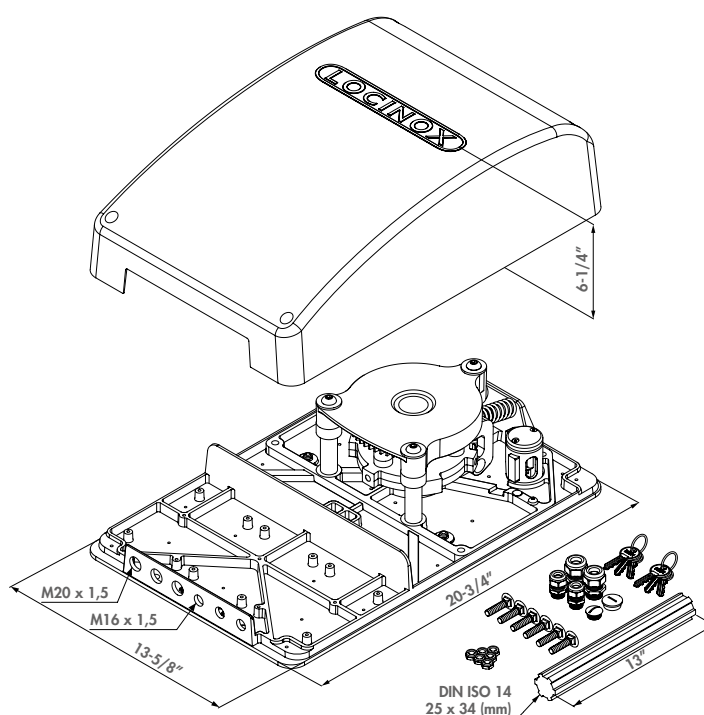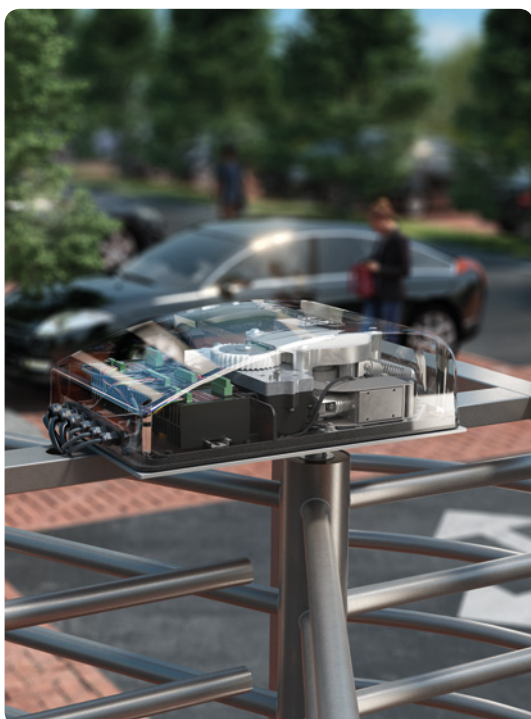





## TURNITEC base mechanism 3-arm

TT-BM3S

With the TURNITEC base mechanism you can bi-directionally operate your turnstile free-turning. This mechanism can be modular expanded with the mechanical and electromechanical locking modules and a hydraulic damper to further finetune the access control and usability of your turnstile.

### Specifications

- ✓ Designed with rustproof materials
- ✓ With easy to mount optional welding plate and spline axle
- ✓ Dimensions: 21-21/32" x 13-3/4" x 6-11/16"
- ✓ IP55 housing protects the mechanism against water, dirt, wind, dust and vermin
- ✓ Modular system to further expand
- ✓ High quality and guaranteed performance (tested on 1 million movements)

### Order code

**TT-BM3S** Base mechanism 20-7/8" x 13-3/4" x 6-11/16"



## TURNITEC welding plate in black steel

TT-BSP / TT-SSP

Welding plate for TURNITEC mechanism for a flawless installation of the TURNITEC on any turnstile. The pre-lasered drilling pattern and cutouts for the cylinders ensure a fast and error-free installation.

### Specifications

- ✓ Welding plate in black steel or stainless steel
- ✓ Plate thickness: 3/16"
- ✓ Punched drilling pattern of base mechanism and cylinders for an error-free installation

### Order codes

**TT-SSP-** Stainless Steel welding plate 20-7/8" x 13-3/4" x 3/16"

**TT-BSP-** Black Steel welding plate 20-7/8" x 13-3/4" x 3/16"



## Hydraulic damper for TURNITEC

TT-DM3 (Patented)

Unique hydraulic damper for your TURNITEC mechanism. The patented system is unaffected by temperature changes. The first half of the rotation is undamped and the second half is damped progressively thanks to the continuous damping of the mechanism. This results in a fluent motion of the turnstile and avoids the turnstile hitting the users heels.

### Specifications

- ✓ Patented hydraulic damping system
- ✓ Damping of the rotational movement is continuous and progressive and starts from 60° in the 3-arm version
- ✓ Smooth and gradual movements through continuous damping by the damper
- ✓ Easy to retrofit on an existing TURNITEC system
- ✓ High quality and guaranteed performance (tested on 1 million movements)
- ✓ The system is unaffected by temperature changes

### Order code

**TT-DM3** Hydraulic damping module for TT-BM3



**24h  
SHIPPING**

## Fail Open electromodule 3-arm for TURNITEC

TT-FO31

With the electromechanical module an operator has the ability to control incoming and outgoing traffic. Granting access or closing the system, changing the rotational direction and executing access control all can be managed easily with the TURNITEC module.

### Specifications

- ✓ Time range (1 to 99s) of switched state controlled by push buttons
- ✓ 100% secure: reset function to rest after 1 full rotation of the turnstile
- ✓ Fitted with a 24V DC power supply made for exterior use and with integrated timer
- ✓ Input voltage: 110V AC / Maximum output power: 25W
- ✓ Easy to expand with a TT-COUNTER-LIGHT module to control a counter and/or signalisation
- ✓ Anti-passback security: protected against the simultaneous entrance of 2 persons thanks to the 60° locking mechanism
- ✓ High quality and guaranteed performance (tested on 1 million movements)

### Order code

**TT-FO31** Fail-Open access control electromodule for TT-BM3



**24h  
SHIPPING**

## Fail Close electromodule 3-arm for TURNITEC

TT-FC31

With the electromechanical module an operator has the ability to control incoming and outgoing traffic. Granting access or closing the system, changing the rotational direction and executing access control, all can be managed easily with the TURNITEC module. After authorisation the turnstile is unlocked electronically and visitors have access to the terrain.

### Specifications

- ✓ Time range (1 to 99s) of switched state controlled by push buttons
- ✓ 100% secure: reset function to rest after 1 full rotation of the turnstile
- ✓ Fitted with a 24V DC power supply made for exterior use and with integrated timer
- ✓ Input voltage: 110V AC / Maximum output power: 25W
- ✓ Easy to expand with a TT-COUNTER-LIGHT module to control a counter and/or signalisation
- ✓ Anti-passback security: protected against the simultaneous entrance of 2 persons thanks to the 60° locking mechanism
- ✓ High quality and guaranteed performance (tested on 1 million movements)

### Order code

**TT-FC31** Fail-Close access control electromodule for TT-BM3



## Mechanical module for TURNITEC

TT-MM3S

This module for the TURNITEC mechanism offers the advantage of working completely mechanical. No power supply or cabling is needed. The release and locking of a direction of rotation is easy to set with a Europrofile cylinder lock. People can enter the terrain by pushing the turnstile arm.

### Specifications

- ✓ Can be used for left or right rotation
- ✓ No electricity or power supply needed
- ✓ Anti-passback security: protected against the simultaneous entrance of 2 persons thanks to the 60° locking mechanism
- ✓ Mechanical module easy to install on site or to be replaced by an electromechanical module
- ✓ High quality and guaranteed performance (tested on 1 million movements)

### Order code

**TT-MM3S** Mechanical access control module for TT-BM3



## Turnitec counter & passing light signals module

TT-CL1

Plug&Play module which enables connecting counters and passing light signals in both turning directions. A counter tells you how many people are on the terrain or how many rotations your turnstile made while passing light signals guarantee a swift, safe and correct use of the turnstile.

### Specifications

- ✓ Easy to connect with the TT-FO31 and TT-FC31 module
- ✓ Controlled by means of included reed contacts
- ✓ For both clockwise (CW) and counterclockwise (CCW) direction a voltage free changeover contact (NO&NC) is provided for passing light signal control (max 250V AC (30V DC)/1A)
- ✓ For both rotational directions a voltage free NO contact (0,5s closed at a correspondent move) is provided for connection of an external counter (max 250V AC (30V DC)/1A on the NO contact)
- ✓ Aluminum powder coated housing with heat dissipation fins

### Order code

**TT-CL1** Turnitec counter & passing lights module



**24h  
SHIPPING**

## Hub for seamless connection with turnstile

TT-SAH

Hub for seamless connection of the Turnitec base mechanism with the spline axle and the turnstile.

### Specifications

- ✓ Grooved hub for optimal connection with spline axle
- ✓ 1 on 1 transmission of rotational movement
- ✓ Hub in stainless steel
- ✓ Equal distribution of the load over the hub's teeth (increased fatigue resistance)
- ✓ Tolerances according ISO2768-M
- ✓ Diameter and height: 2-23/64"
- ✓ Diameter center hole: 1-7/64"
- ✓ Height of teeth: 0-1/8 in

### Order code

**TT-SAH** Hub for seamless connection with turnstile



**24h  
SHIPPING**

## Lower bearing and flange assembly for turnstiles

TT-PIVOT

Stainless steel bearing in a 11/16" thick aluminum baseplate. With bearings for a guaranteed smooth operation. Available with ball bearing or tapered roller bearing.

### Specifications

- ✓ Aluminum baseplate to be adjusted to the turnstile diameter
- ✓ TT-PIVOT-BB: double sealed, stainless steel ball bearing (440 lbs axial load)
- ✓ TT-PIVOT-CC: tapered roller bearing, protected by baseplate (1650 lbs axial load)
- ✓ Stainless steel Ø1" axis with centered M12 threaded hole

### Order codes

**TT-PIVOT-BB** Lower ball bearing and flange assembly for full height turnstiles

**TT-PIVOT-CC** Lower tapered roller bearing and flange assembly for full height turnstiles







# Locks

---

Locinox locks guarantee a well operating gate. Every lock is thoroughly tested excessively in our own test center where they are exposed to the most extreme circumstances. This ensures us that our locks will work in all weather conditions. We offer a variety of locks for garden gates, industrial gates or swimming pool gates. Locinox locks - the safest solution in fence protection.

---



59 Locks for swing gates

73 Locks for child safety gates



76 Locks for sliding gates

101 Insert locks



# i Modularity

One drilling template for all our locks and keeps.

With this interchangeability, the Locinox lock gives you the opportunity to offer a solution for every situation.



100% modular



1 gate profile,  
lots of possibilities



Left/right reversible

1 prepared post = so many possibilities



STANDARD



MORTISE



ORNAMENTAL



ELECTRIC



PANIC LOCK



DOUBLE CYLINDER



CHILD SAFETY



TRIANGULAR  
CYLINDER



ECONOMICAL



PUSH HANDLE



FREE EXIT



MECHANICAL  
CODE LOCK



MECHANICAL WITH  
PUSH HANDLE



MECHANICAL WITH  
PUSH BAR



MAGLOCK



INDUSTRIAL



SECURITY



MODULEC-SA




MODULEC-SH



GARDEN

1 easy installation method for all our locks







## Surface mounted gate lock

LAKQ U2 (Patented)

High quality gate lock with aluminum housing and stainless steel mechanism. We recommend this lock as the standard for your industrial gates. The latch and dead bolt have 3/4" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. Handle depends on color: silver locks ship standard with the modern aluminum anodized handle pair and all other colors ship with the black ornamental handle pair. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap. For a fast and highly precise installation, we recommend using the Drill-Fix drilling jig.

**24h**  
SHIPPING



### Lock box color options



6005

6009

7016


9005

9010



### Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ 4-hole mounting with two hex head socket screws
- ✓ Center distance bolts: 2-3/8"
- ✓ Continuous adjustment of the daybolt up to 3/8" without removing the lock box
- ✓ Stainless steel mechanism

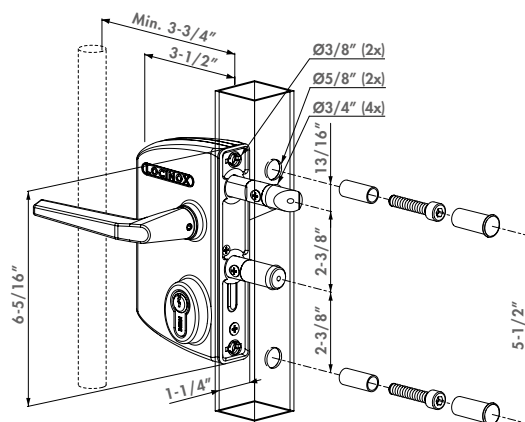

### Recommended keeps



SAKL QF  
P. 95



SHKL QF  
P. 95



MODULEC-SA  
P. 29

### Order codes

For square profiles

**LAKQ3030 U2L** For profiles 1-1/4" to 2" **24h**  
SHIPPING

**LAKQ4040 U2L** For profiles 1-1/2" to 2-1/2" **24h**  
SHIPPING

**LAKQ6060 U2L** For profiles 2-1/2" to 3" **24h**  
SHIPPING

For round profiles

**LARQ3030 U2L** For profiles 1-1/4" to 2" **24h**  
SHIPPING

**LARQ4040 U2L** For profiles 1-1/2" to 2-1/2" **24h**  
SHIPPING

**LARQ6060 U2L** For profiles 2-1/2" to 3"

For flat profiles

**LAPQ1010 U2L** For profiles 3/8" to 1-1/4" **24h**  
SHIPPING

### Recommended handles



3006M  
P. 164



3006I  
P. 165



3006D  
P. 165



KIDLOC  
P. 161

### Easy exit handles & accessories



PUSHBAR-L  
P. 163



3006PUSH  
P. 162



ROLLTOP  
P. 157



DRILL-FIX  
P. 151





## Surface mounted gate lock for Swiss profile cylinder

LAKQ U3 (Patented)

Industrial lock with aluminum housing and stainless steel mechanism. This lock is delivered without a cylinder and is suitable for use with a 7/8" cylinder (Swiss profile cylinder). The latch and dead bolt have 3/4" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. Handle depends on color: silver locks ship standard with the modern aluminum handle pair and all other colors ship with the black ornamental handle pair. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap. For a fast and highly precise installation, we recommend using the Drill-Fix drilling jig.




### Lock box color options

ZILV 6005 6009 7016 9005 9010

### Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Lockbox for Swiss profile cylinder (Ø7/8")
- ✓ Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ 4-hole mounting with two hex head socket screws
- ✓ Center distance bolts: 2-3/8"
- ✓ Continuous adjustment of the daybolt up to 3/8" without removing the lock box
- ✓ Stainless steel mechanism

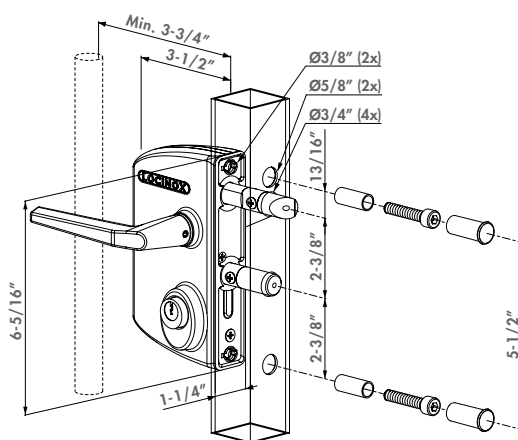

### Recommended keeps



SHKL QF  
P. 95



SAKL QF  
P. 95



MODULEC-SA  
P. 29

### Order codes

For square profiles

**LAKQ3030 U3L** For profiles 1-1/4" to 2"

**LAKQ4040 U3L** For profiles 1-1/2" to 2-1/2"

**LAKQ6060 U3L** For profiles 2-1/2" to 3"

For round profiles

**LARQ3030 U3L** For profiles 1-1/4" to 2"

**LARQ4040 U3L** For profiles 1-1/2" to 2-1/2"

**LARQ6060 U3L** For profiles 2-1/2" to 3"

For flat profiles

**LAPQ1010 U3L** For profiles 3/8" to 1-1/4"



### Recommended handles



3006M  
P. 164



3006I  
P. 165



3006D  
P. 165



3006R  
P. 166

### Easy exit handles & accessories



PUSHBAR-L  
P. 163



3006PUSH  
P. 162



ROLLTOP  
P. 157



DRILL-FIX  
P. 151



**NEW**

## Surface mounted US Mortise cylinder gate lock (USA)

LUKY J5 (Patent pending)

Excellent gate lock with aluminum housing and stainless steel mechanism. Specially developed to use with a standard 1-1/8" Mortise cylinder. Comes standard with 5pin keyed alike or keyed different (drilled 6pin). The latch and dead bolt have 3/8" continuous adjustment to allow perfect alignment of the locking mechanism. A stainless steel throw of 7/8" guarantees secure locking. Black lock standard provided with 3006FA handle (zamac), silver comes with aluminum handle (3006M).

**24h**  
SHIPPING




Lock box color options



### Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Gate Lock with double cylinder dead bolt. Designed for 1-1/8" Mortise profile cylinder
- ✓ Fixing cylinder inch thread 8/32"
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Adjustment of the bolts up to 3/8" continuous without removing the lock
- ✓ 4-hole mounting with two hex head socket screws
- ✓ Interchangeable with all Locinox locks
- ✓ The lock box requires a 3-3/8" spacing to the first picket, fitting nicely into most gates

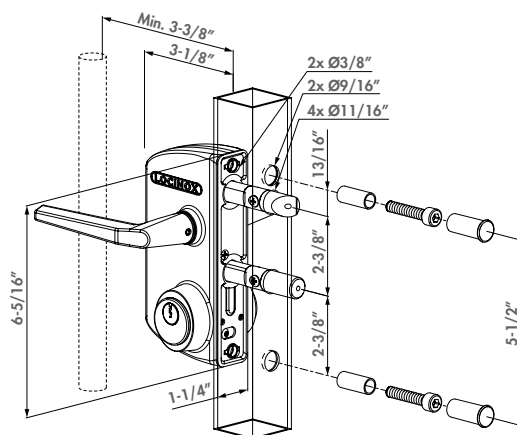

### Recommended keeps



SHKL QF  
P. 95



SAKL QF  
P. 95



MODULEC-SA  
P. 29

### Order code

For square profiles

**LUKY3030 J5L** For profiles 1-1/4" to 1-3/8" **24h** SHIPPING

**LUKY4040 J5L** For profiles 1-1/2" to 1-3/4" **24h** SHIPPING

**LUKY5050 J5L** For profiles 1-7/8" to 2" **24h** SHIPPING

**LUKY6060 J5L** For profiles 2-1/2" **24h** SHIPPING

For flat profiles

**LUPY1010 J5L** For profiles 3/8" **24h** SHIPPING

**LUPY2020 J5L** For profiles 7/8" to 1-1/8" **24h** SHIPPING



### Recommended handles



3006M  
P. 164



3006FA  
P. 165

### Accessories



ROLLTOP  
P. 157



LOCITOOL LA  
P. 157



MRT-118  
P. 176



DRILL-FIX  
P. 151









## Surface mounted anti-panic gate lock

LPKQ U2

Stainless steel superior anti-panic lock with aluminum housing. Escape or exit from inside is possible at all times by operating the handle. Mechanical access from the outside is always possible by operating the cylinder. This lock is compatible with an optional PUSHhandle or PUSHBAR. The latch and dead bolt have 3/4" continuous adjustment to allow latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. For a fast and highly precise installation, we recommend using the Drill-Fix drilling jig.




### Lock box color options

ZILV 6005 6009 9005 7016 9010

### Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ 4-hole mounting with two hex head socket screws
- ✓ Center distance bolts: 2-3/8"
- ✓ Continuous adjustment of the daybolt up to 3/8" without removing the lock box
- ✓ Stainless steel mechanism
- ✓ Tested up to 500 000 movements
- ✓ Can be applied to gates complying with EN 179

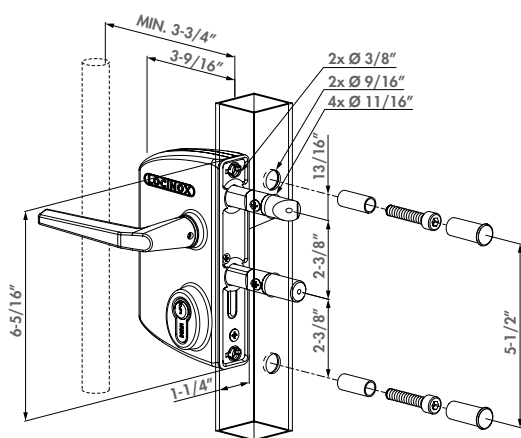

### Recommended keeps



SAKL QF  
P. 95



SHKL QF  
P. 95



MODULEC-SA  
P. 29

### Order codes

For square profiles

LPKQ4040 U2L For profiles 1-1/2" to 2-1/2"

LPKQ6060 U2L For profiles 2-1/2" to 3"

LPKQ8080 U2L For profiles 3" to 4"

LPKQ100100 U2L For profiles 4" to 4-1/2"



### Recommended handles



PUSHBAR-L  
P. 163



3006PUSH  
P. 162

### Accessories



ROLLTOP  
P. 157



3970USA  
P. 150



LOCITOOL LA  
P. 157



DRILL-FIX  
P. 151

# i Sets

Locinox supports you in your logistic process. Select and compose your own gate hardware set and avoid stock ruptures or false deliveries of gate components to your customers. The set components are all together and, above all, packed in a robust and weatherproof box. If you wish, your logo can be put on the box for a maximal support of your brand. We will be glad to add your manuals or any other information according to your needs.



100% modular




Time saving



No research work

## Garden gate - box set

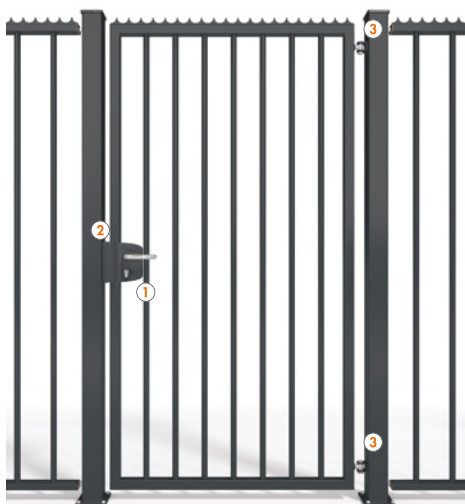

## 1 gate wing - foil set



## 2 gate wings - foil set







## Surface mounted double cylinder gate lock for swing gates

LDKZ D1

Industrial swing gate lock with aluminum housing and stainless steel mechanism with 2 cylinders. You only need to use 1 of the cylinders in order to open or to close the lock. This lock is ideal to use to provide entry to third parties like fire men or waste collectors. The double locking of the solid stainless steel night bolt also ensures a secure closing.




Lock box color options

ZILV 6005 7016 9005

### Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ For gate profiles from 3/8" till 3-15/16"
- ✓ Stainless steel mechanism
- ✓ Non-adjustable latch and dead bolt
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Double throw of the night bolt 1"
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ 4-hole mounting with two hex head socket screws
- ✓ Interchangeable with all Locinox locks

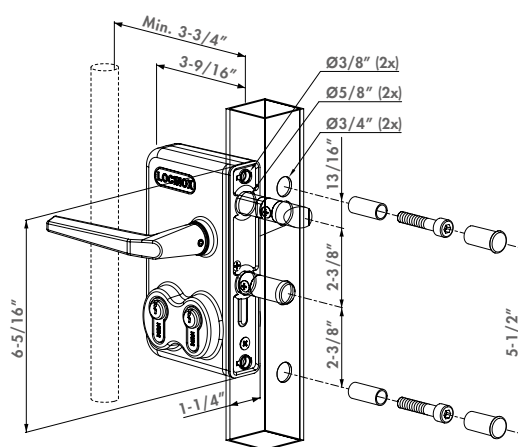

### Recommended keeps



SAKL QF  
P. 95



SHKL QF  
P. 95



MODULEC-SA  
P. 29

### Order codes

For square profiles

<b>LDKZ3030 D1L</b>	For profiles of 1-1/4"
<b>LDKZ4040 D1L</b>	For profiles of 1-1/2"
<b>LDKZ5050 D1L</b>	For profiles of 2"
<b>LDKZ6060 D1L</b>	For profiles of 2-3/8"
<b>LDKZ8080 D1L</b>	For profiles of 3-1/8"
<b>LDKZ100100 D1L</b>	For profiles of 4"

For round profiles

<b>LDRZ3030 D1L</b>	For profiles of 1-1/4"
<b>LDRZ4040 D1L</b>	For profiles of 1-1/2"
<b>LDRZ5050 D1L</b>	For profiles of 2"
<b>LDRZ6060 D1L</b>	For profiles of 2-3/8"

For flat profiles

<b>LDPZ1010 D1L</b>	For profiles of 3/8"
<b>LDPZ2323 D1L</b>	For profiles of 29/32"



### Cylinders and accessories



3012-POC-  
P. 173



3071-  
P. 176



DRILL-FIX  
P. 151



3970USA  
P. 150



## VINCI - Surface mounted mechanical code lock

LMKQ V2 (Patented)

High quality mechanical code lock for swing gates with aluminum housing and stainless steel mechanism. This lock is 100% mechanical, so no batteries or electricity are required, which makes it very easy to equip any gate with access control. The dead bolt is used to override the code panel and secure the gate. The latch and dead bolt have 3/4" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees a secure locking. Ships standard with the Club handle pair. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.

**24h**  
SHIPPING



### Lock box color options



6005

6009


9005

7016

9010

### Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Operational code panel on both sides
- ✓ Independent entrance and exit codes
- ✓ Polyamide rain and dust cover
- ✓ Easy and fast set-up or modification of the access codes
- ✓ With adjustable rollerbolt for easy closing
- ✓ Extremely strong and user-friendly mechanism
- ✓ Automatic code reset after opening by means of the handle
- ✓ Anti-code detection with integrated security press plate
- ✓ Interchangeable with all Locinox locks

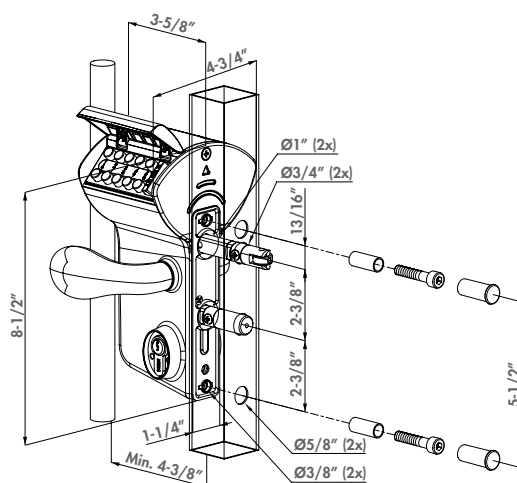

### Recommended keeps



SAKL QF  
P. 95



SHKL QF  
P. 95

### Order codes

For square profiles

**LMKQ3030 V2L** For profiles 1-1/4" to 2" **24h** SHIPPING

**LMKQ4040 V2L** For profiles 1-1/2" to 2-1/2" **24h** SHIPPING

**LMKQ6060 V2L** For profiles 2-1/2" to 3" **24h** SHIPPING

For round profiles

**LMRQ3030 V2L** For profiles 1-1/4" to 2"

**LMRQ4040 V2L** For profiles 1-1/2" to 2-1/2" **24h** SHIPPING

**LMRQ6060 V2L** For profiles 2-1/2" to 3"

For flat profiles

**LMPQ1010 V2L** For profiles 3/8" to 1-1/4" **24h** SHIPPING

### Recommended handles



3006C  
P. 164



3006I  
P. 165



3006D  
P. 165

### Compatible with every gate closer



SAMSON-2  
P. 17



VERTICLOSE-2-  
P. 21



MAMMOTH-180  
P. 15



TIGER  
P. 14





## FREE VINCI - Surface mounted mechanical code lock with secured entrance and free exit

LFKQ X1 (Patented)

One sided code mechanical code lock (Free Exit) for swing gates with aluminum housing and stainless steel mechanism. The Free Vinci offers you the ability to secure one side with a code for entrance while leaving the other side free for exit. This lock is 100% mechanical, so no batteries nor electricity are required, which makes it very easy to equip any gate with access control. The latch bolt has 3/4" continuous adjustment to allow perfect alignment of the locking mechanism. Ships standard with the Club handle for the secure "code" side and a round knob for the exit side. The PUSH handle is available for the exit side. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.

**24h**  
SHIPPING




### Lock box color options



### Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Entrance secured by code, free exit
- ✓ Code panel with stainless steel push buttons on one side
- ✓ Polyamide rain and dust cover
- ✓ Easy and fast set-up or modification of the access codes
- ✓ With adjustable rollerbolt for easy closing
- ✓ Extremely strong and user-friendly mechanism
- ✓ Automatic code reset after opening by means of the handle
- ✓ Anti-code detection with integrated security press plate
- ✓ Interchangeable with all Locinox locks

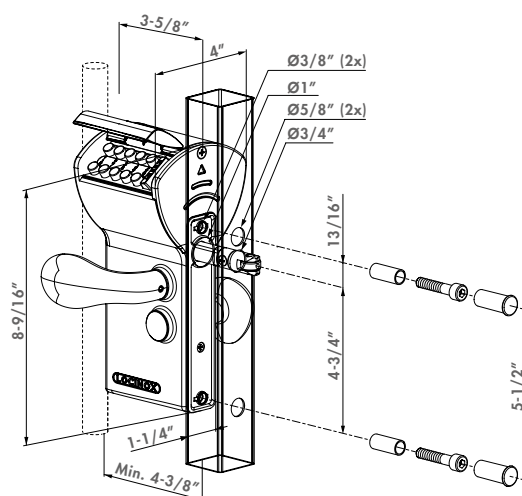

### Recommended keeps



SAKL QF  
P. 95



SHKL QF  
P. 95

### Order codes

For square profiles

**LFKQ3030 X1L** For profiles 1-1/4" to 2" **24h** SHIPPING

**LFKQ4040 X1L** For profiles 1-1/2" to 2-1/2" **24h** SHIPPING

**LFKQ6060 X1L** For profiles 2-1/2" to 3" **24h** SHIPPING

For round profiles

**LFRQ3030 X1L** For profiles 1-1/4" to 2"

**LFRQ4040 X1L** For profiles 1-1/2" to 2-1/2" **24h** SHIPPING

**LFRQ6060 X1L** For profiles 2-1/2" to 3"

For flat profiles

**LFPQ1010 X1L** For profiles 3/8" to 1-1/4" **24h** SHIPPING



### Compatible easy exit handles



PUSHBAR-L-  
P. 163



3006PUSH  
P. 162





## Surface mounted electric gate lock with Fail Open functionality

LEKQ U4 (Patented)

Electrical lock with aluminum housing and stainless steel mechanism. The lock functions as a "buzz in - buzz out" device and connects to any 12 Volt control system. The handles are blocked when the lock is powered. The dead bolt is used to override the control system and secure the gate. The latch and dead bolt have 3/4" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the round knob handle set. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.

**24h  
SHIPPING**



### Lock box color options



6005

6009


7016

9005

9010

### Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Fail Open: Lock is open when power is interrupted
- ✓ Blocking or releasing of the handles
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Continuous adjustment of the daybolt up to 3/8" without removing the lock box
- ✓ 4-hole mounting with two hex head socket screws
- ✓ Interchangeable with all Locinox locks
- ✓ Voltage: 12V AC/DC
- ✓ Current: 0.3A

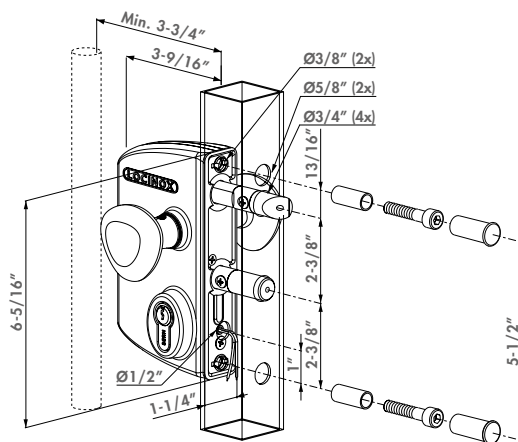

### Recommended keeps



SAKL QF  
P. 95



SHKL QF  
P. 95

### Order codes

For square profiles

**LEKQ3030 U4L** For profiles 1-1/4" to 2" **24h SHIPPING**

**LEKQ4040 U4L** For profiles 1-1/2" to 2-1/2" **24h SHIPPING**

**LEKQ6060 U4L** For profiles 2-1/2" to 3"

For round profiles

**LERQ3030 U4L** For profiles 1-1/4" to 2"

**LERQ4040 U4L** For profiles 1-1/2" to 2-1/2"

**LERQ6060 U4L** For profiles 2-1/2" to 3"



### Recommended handles & cable guiding



3006R  
P. 166



3006C  
P. 164



DVK-HD  
P. 45



DVK  
P. 44

### Recommended power supplies



DC-ACCESS-12V-20W  
P. 46



AC-TRANS-12V-25W  
P. 45



DC-POWER-12V-20W  
P. 46



## Surface mounted electric gate lock with Fail Close functionality

LIKQ U2 (Patented)

Electric lock with aluminum housing and stainless steel mechanism. The lock functions as a "buzz in - buzz out" device and connects to any 12 Volt control system. The handles are blocked when the lock has no power (Fail Close). The dead bolt is used to override the control system and secure the gate. The latch and dead bolt have 3/4" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the round knob handle set. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.




### Lock box color options

ZILV 6005 6009 7016 9005 9010

### Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Fail Close: Lock is closed when power is interrupted
- ✓ Blocking or releasing of the handles
- ✓ Easy left or right hand changing
- ✓ Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Continuous adjustment of the daybolt up to 3/8" without removing the lock box
- ✓ 4-hole mounting with two hex head socket screws
- ✓ Interchangeable with all Locinox locks
- ✓ Voltage: 12V AC/DC
- ✓ Current: 0.3A

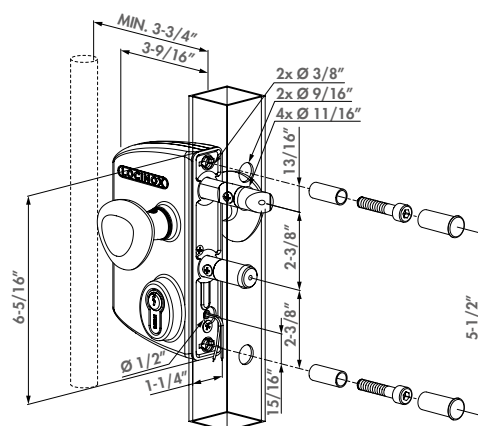

### Recommended keeps



SAKL QF  
P. 95



SHKL QF  
P. 95

### Order codes

For square profiles

**LIKQ3030 U2L** For profiles 1-1/4" to 2"

**LIKQ4040 U2L** For profiles 1-1/2" to 2-1/2"

**LIKQ6060 U2L** For profiles 2-1/2" to 3"

For round profiles

**LIRQ3030 U2L** For profiles 1-1/4" to 2"

**LIRQ4040 U2L** For profiles 1-1/2" to 2-1/2"

**LIRQ6060 U2L** For profiles 2-1/2" to 3"



### Recommended handles & cable guiding



3006R  
P. 166



3006C  
P. 164



DVK-HD  
P. 45



DVK  
P. 44

### Recommended power supplies



DC-ACCESS-12V-20W  
P. 46



AC-TRANS-12V-25W  
P. 45



DC-POWER-12V-20W  
P. 46



## Small surface mounted ornamental gate lock

LAKY F2 (Patented)

Ornamental lock with aluminum housing and stainless steel mechanism. We recommend this lock as the standard for your ornamental gates as it only requires a 3-3/8" spacing to the first picket and will fit nicely into most gates. The latch and dead bolt have 3/8" continuous adjustment to allow perfect latching / locking of the mechanism. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the black zamac ornamental handle pair. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.

**24h**  
SHIPPING




### Lock box color options



### Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ Adjustment of the bolts up to 3/8" continuous without removing the lock
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ 4-hole mounting with two hex head socket screws
- ✓ Center distance bolts: 2-3/8"

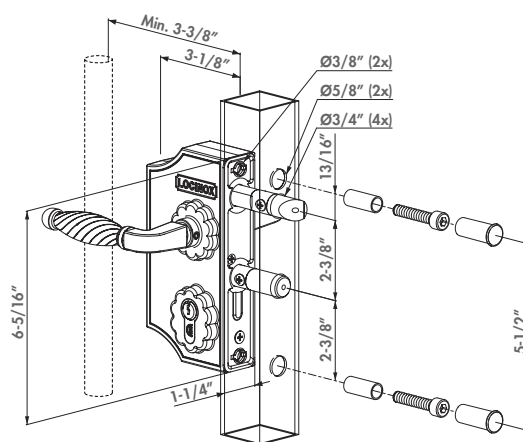

### Recommended keeps



SPKZ QF  
P. 97



SPKZ-TK  
P. 97



MODULEC-SA  
P. 29

### Order codes

For square profiles

**LAKY3030 F2L** For profiles 1-1/4" to 1-3/8" **24h** SHIPPING

**LAKY4040 F2L** For profiles 1-1/2" to 1-3/4" **24h** SHIPPING

**LAKY5050 F2L** For profiles 1-7/8" to 2" **24h** SHIPPING

For round profiles

**LARY3030 F2L** For profiles 1-1/4" to 1-3/8"

**LARY4040 F2L** For profiles 1-1/2" to 1-3/4"

**LARY5050 F2L** For profiles 1-7/8" to 2"

For flat profiles

**LAPY1010 F2L** For profiles 3/8" **24h** SHIPPING



### Compatible handles



3006FA  
P. 165



3006I  
P. 165



KIDLOC  
P. 161

### Ornamental hinges



G-ORNA-LR  
P. 122



G-ORNA-WP  
P. 122



GDP  
P. 125



GP-U-BASE  
P. 125





## Large surface mounted ornamental gate lock

LAKQ H2 (Patented)

Ornamental lock with aluminum housing and stainless steel mechanism. We recommend this wider ornamental lock for gates that have 3-3/4" spacing to the first picket on ornamental gates. The latch bolt and dead bolt have 3/4" continuous adjustment to allow perfect alignment of the locking mechanism. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the black zamac ornamental handle pair. The latch gap required is keep dependent, but the standard and security keeps require a 1-1/4" latch gap.




### Lock box color options

6005 6009 9005 9010 ZILV 7016

### Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ Continuous adjustment of the daybolt up to 3/8" without removing the lock box
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ 4-hole mounting with two hex head socket screws
- ✓ Center distance bolts: 2-3/8"

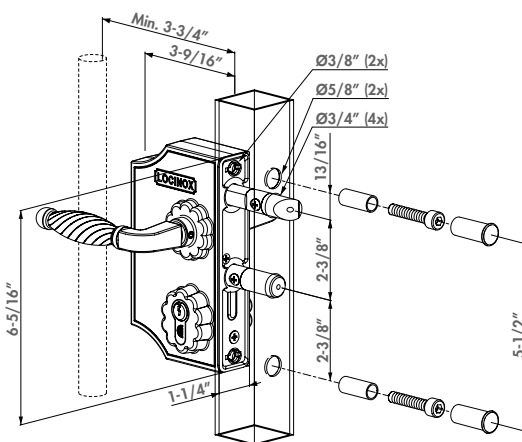

### Recommended keeps



SPKZ QF  
P. 97



SPKZ-TK  
P. 97



MODULEC-SA  
P. 29

### Order codes

For square profiles

**LAKQ3030 H2L** For profiles 1-1/4" to 2" **24h SHIPPING**

**LAKQ4040 H2L** For profiles 1-1/2" to 2-1/2" **24h SHIPPING**

**LAKQ6060 H2L** For profiles 2-1/2" to 3" **24h SHIPPING**

For round profiles

**LARQ3030 H2L** For profiles 1-1/4" to 2"

**LARQ4040 H2L** For profiles 1-1/2" to 2-1/2"

**LARQ6060 H2L** For profiles 2-1/2" to 3"

For flat profiles

**LAPQ1010 H2L** For profiles 3/8" to 1-1/4" **24h SHIPPING**

### Compatible handles



3006FA  
P. 165



3006D  
P. 165



KIDLOC  
P. 161

### Ornamental hinges




G-ORNA-LR  
P. 122



G-ORNA-WP  
P. 122



1005WPF  
P. 124

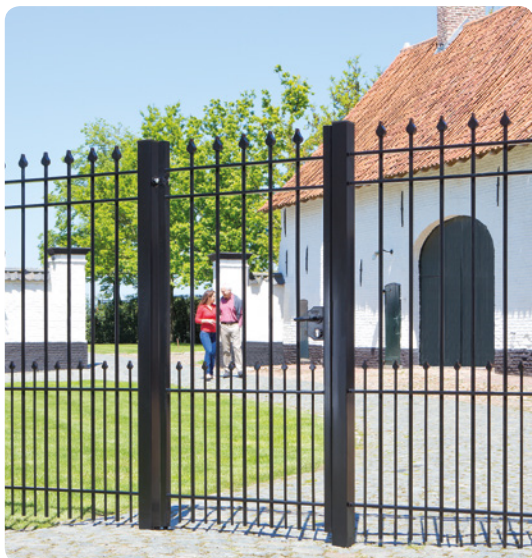



### Lock box color options

6005 6009 7016 7040 9005 9010


### Specifications

- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Throw of the dead bolt, 7/8" in 1 turn of the key
- ✓ 4-hole mounting with two hex head socket screws
- ✓ Polyamide lock box and handles
- ✓ Center distance bolts: 2-3/8"
- ✓ For 1-1/2" gate profiles only
- ✓ Interchangeable with all Locinox locks
- ✓ No key operation of the latch bolt

## Surface mounted garden gate lock

LAKZ P1

Economical garden walk gate lock with polyamide housing and non-adjustable stainless steel mechanism. This lock is recommended for all your small gates and for residential gates where price is a driving issue. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the black poly handle pair. The latch gap required is keep dependent, but the SMKL polyamide keep requires a 1-1/8" latch gap.

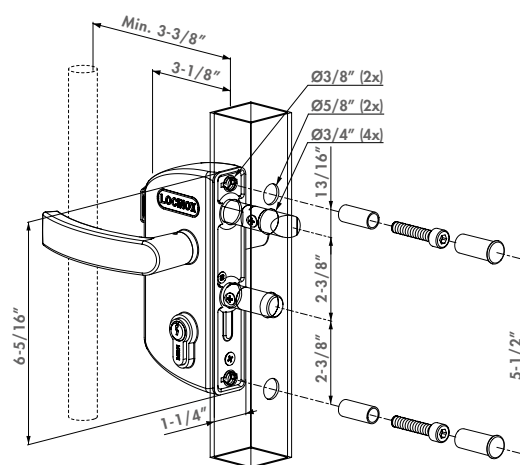

### Recommended keeps



SMKL QF  
P. 96



SKRZ  
P. 96



SAKL QF  
P. 95

### Order codes

For square profiles

**LAKZ4040 P1L** For profiles of 1-1/2"

For round profiles

**LARZ4040 P1L** For profiles of 1-1/2"



### Recommended handles



3006P  
P. 166



3006G  
P. 165



KIDLOC  
P. 161

### Accessories



3006PC  
P. 94



ROLLTOP  
P. 157



3970USA  
P. 150



DRILL-FIX  
P. 151



## Surface mounted child safety lock

LAKZ P1 WSI (Patented)

Child safety lock with non-adjusting stainless steel mechanism and polyamide housing. This lock conforms to the European swimming pool standard NF P90-306. The Kidloc handle set prevents the access to the pool for small children. The unique rollerbolt reduces latch resistance allowing the gate close easier. A stainless steel throw of 7/8" guarantees secure locking. Ships standard with the Kidloc handle pair. The latch gap required is keep dependent, but the SMKL polyamide keep requires a 1-1/8" latch gap.




### Lock box color options

6005 6009 7016 7040 9005 9010

### Specifications

- ✓ Stainless steel lock mechanism, Fixed, non-adjustable latch/dead bolts
- ✓ Polyamide lock box
- ✓ With adjustable rollerbolt for easy closing
- ✓ With Kidloc: child safety handle for swimming pools
- ✓ A complete package including a high quality stainless steel lock with a security knob and a stainless steel rollerbolt. Conforms to swimming pool standard NF P90-306

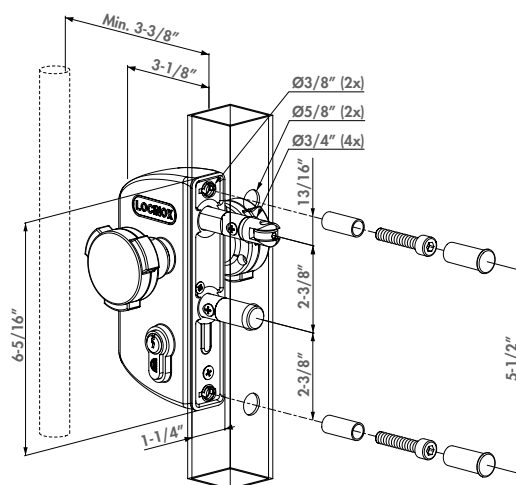

### Recommended keeps



SMKL QF  
P. 96



SKRZ  
P. 96

### Order codes

LAKZ4i4i P1L WSI For profiles of 1-1/2"

LAKZ5i5i P1L WSI For profiles of 2"

### Recommended gate closers



TIGER  
P. 14



MAMMOTH-180  
P. 15



LION  
P. 18



SWING40  
P. 130

### Accessories



KIDLOC  
P. 161



ROLLTOP  
P. 157



3970USA  
P. 150



DRILL-FIX  
P. 151







### Lock box color options

ZILV 6005 6009 9005 9010


### Specifications

- ✓ Stainless steel lock mechanism
- ✓ Stainless steel rollerbolt: Reduces latch resistance and allows the gate close easier
- ✓ We strongly advise you to read the swimming pool standard NF P90-306 before manufacturing any swimming pool gate
- ✓ For 1-1/2" gate profiles only

## Swimming pool gate lock

TWIST40 (Patented)

The TWIST40 swimming pool gate lock has a stainless steel mechanism and black PA and powder coated aluminum housing. Installs into the gate upright at the top of the gate. The TWIST40 opens with a "press and twist" action which prevents the access to the pool for small children. The unique rollerbolt reduces latch resistance allowing the gate to close easier. This lock conforms to the European swimming pool standard NF P90-306. For gate profiles of 1-1/2" only. 16 Ga tube only.

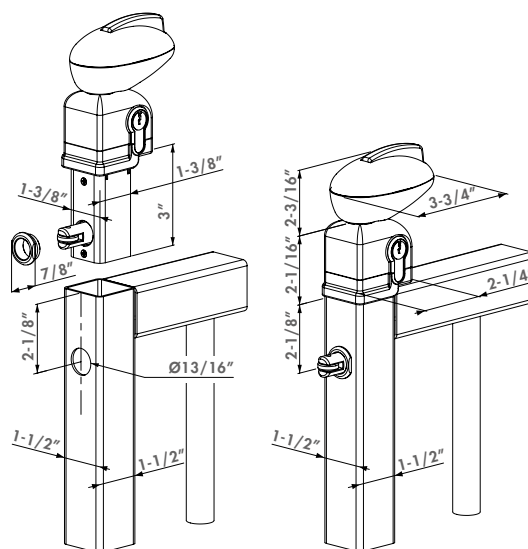

### Recommended keeps



STK QF  
P. 99



STR60 QF  
P. 99

### Order code

**TWIST40** For profiles of 1-1/2"



### Recommended gate closers



MAMMOTH-180  
P. 15



TIGER  
P. 14



VERTICLOSE-2-  
P. 21



SWING40  
P. 130

### Cylinder & compatible hinges



3012-46-STD  
P. 174



GBM12  
P. 131



GBM12-DP  
P. 131



GBM16-DP  
P. 132



Child safety locks





## LEONARDO - Mechanical code lock for sliding gates

LLKZ V2 (Patented)

Mechanical code lock for sliding gates with aluminum housing and stainless steel mechanism. Since this lock is 100% mechanical, no electricity or batteries are required, so this system gives you the opportunity to equip any sliding gate with access control. The dead bolt is used to override the code panel and secure the gate. The unique Twistfinger catch bolt and auto-correcting keep ensures latching of your sliding gate. Catch bolts are available to fit gate frame profiles from 1-1/2" to 5" wide. Works with cantilever gate systems or fixed roller systems. Ships standard with the Club handle pair.

**24h  
SHIPPING**



### Lock box color options



6005

6009


7016

9005

9010

### Specifications

- ✓ 100% mechanical: no battery or electricity required
- ✓ Adjustable for horizontal or vertical mounting of the keep (catch bolt)
- ✓ Operational code panel on both sides
- ✓ Independent entrance and exit codes
- ✓ Equipped with dust and rain covers
- ✓ Easy and fast set-up or modification of the access codes
- ✓ Accepts 4 to 6 digit code combinations
- ✓ Extremely strong and user-friendly mechanism
- ✓ Automatic code reset after opening by means of the handle
- ✓ Anti-code detection with integrated security press plate
- ✓ Stainless steel collar around the Twistfinger prevents cutting through the Twistfinger (catch bolt)

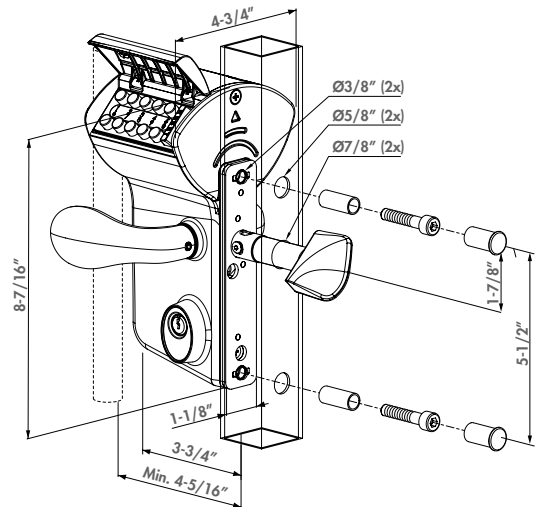

### Recommended keep and adapter case



SSKZ QF  
P. 98



O-SET  
P. 98

### Order codes

For square profiles

LLKZ4040 V2L	For profiles of 1-1/2"
LLKZ5050 V2L	For profiles of 2" <b>24h SHIPPING</b>
LLKZ6060 V2L	For profiles of 2-3/8" <b>24h SHIPPING</b>
LLKZ8080 V2L	For profiles of 3-1/8"
LLKZ100100 V2L	For profiles of 4"
LLKZ120120 V2L	For profiles of 4-3/4"

For round profiles

LLRZ4040 V2L	For profiles of 1-1/2"
LLRZ5050 V2L	For profiles of 2"
LLRZ6060 V2L	For profiles of 2-3/8"
LLRZ8080 V2L	For profiles of 3-1/8"
LLRZ100100 V2L	For profiles of 4"
LLRZ120120 V2L	For profiles of 4-3/4"



### Recommended accessories



3970LS  
P. 150



DRILLØ15  
P. 150



LOCITOOL LA  
P. 157









**24h  
SHIPPING**


### Lock box color options


**6005**
**6009**
**7016**
**9005**
**9010**

### Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ Chassis, mechanism and Twistfinger in stainless steel
- ✓ Adjustable for horizontal or vertical mounting of the keep (catch bolt)
- ✓ Mounting with 2 hex head socket screws
- ✓ Innovative closing system
- ✓ Stainless steel collar around the Twistfinger prevents cutting through the Twistfinger (catch bolt)
- ✓ Standard with reinforced aluminum handle pair
- ✓ 3006S: Square 10 mm shaft (appx 5/16")

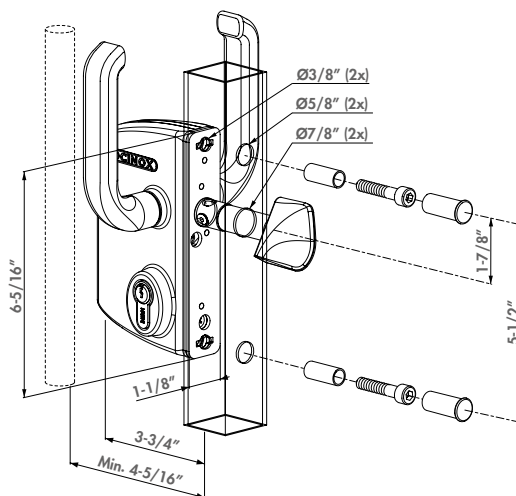

### Recommended keep and adapter case



**SSKZ QF**  
P. 98



**O-SET**  
P. 98

### Order codes

For square profiles

**LSKZ4040 U2L** For profiles of 1-1/2"

**LSKZ5050 U2L** For profiles of 2" **24h SHIPPING**

**LSKZ6060 U2L** For profiles of 2-3/8" **24h SHIPPING**

**LSKZ8080 U2L** For profiles of 3-1/8"

**LSKZ100100 U2L** For profiles of 4"

**LSKZ120120 U2L** For profiles of 4-3/4"

For round profiles

**LSRZ4040 U2L** For profiles of 1-1/2"

**LSRZ6060 U2L** For profiles of 2-3/8"

**LSRZ8080 U2L** For profiles of 3-1/8"

**LSRZ100100 U2L** For profiles of 4"

**LSRZ120120 U2L** For profiles of 4-3/4"



### Recommended handle & accessories



**3006S**  
P. 164



**3970LS**  
P. 150



**DRILLØ15**  
P. 150



**LOCITOOL LA**  
P. 157



## Double Cylinder Lock

LGKZ D1

Industrial sliding gate lock with aluminum housing and stainless steel mechanism with 2 cylinders. You only need to use 1 of the cylinders in order to open or to close the lock. This lock is ideal to use to provide entry to third parties like the firemen or waste collectors.




### Lock box color options

ZILV 6005 7016 9005

### Specifications

- ✓ ISO 9227 KTL / E-coated lock box withstands 1000 hours of salt spray test
- ✓ For gate profiles from 1-1/2" until 4-3/4"
- ✓ Chassis, mechanism and Twistfinger in stainless steel
- ✓ Adjustable for horizontal or vertical mounting of the keep (catch bolt)
- ✓ Innovative closing system
- ✓ Stainless steel collar around the Twistfinger prevents cutting through the Twistfinger (catch bolt)
- ✓ 3-hole mounting with two hexagon socket head screws
- ✓ Exchangeable with Locinox LS-Locks
- ✓ Standard with reinforced aluminum handle pair

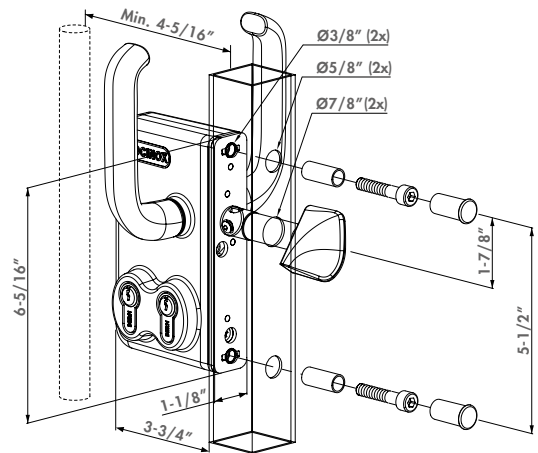

### Recommended keeps



SSKZ QF  
P. 98



O-SET  
P. 98

### Order codes

For square profiles

<b>LGKZ4040 D1L</b>	For profiles of 1-1/2"
<b>LGKZ5050 D1L</b>	For profiles of 2"
<b>LGKZ6060 D1L</b>	For profiles of 2-3/8"
<b>LGKZ8080 D1L</b>	For profiles of 3-1/8"
<b>LGKZ100100 D1L</b>	For profiles of 4"
<b>LGKZ120120 D1L</b>	For profiles of 4-3/4"

For round profiles

<b>LGRZ4040 D1L</b>	For profiles of 1-1/2"
<b>LGRZ5050 D1L</b>	For profiles of 2"
<b>LGRZ6060 D1L</b>	For profiles of 2-3/8"
<b>LGRZ8080 D1L</b>	For profiles of 3-1/8"
<b>LGRZ100100 D1L</b>	For profiles of 4"
<b>LGRZ120120 D1L</b>	For profiles of 4-3/4"



### Cylinders and accessories



3012-POC-  
P. 173



3071-  
P. 176



3006S  
P. 164



DRILL-FIX  
P. 151



**24h  
SHIPPING**

## Specifications


- ✓ Lock mechanism with cover plate protects against dirt penetration
- ✓ Patented "Click-It" system makes thread tapping unnecessary
- ✓ Continuous adjustment of the daybolt up to 3/8" without dismounting the lockbox
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Stainless steel mechanism, hook, front plate and latch bolt
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Throw of the hook: 13/16"
- ✓ Center-distance cylinder <=> handles = 3-5/8"
- ✓ Optional: Cover shield for handle & cylinder holes in aluminum, polyamide or stainless steel
- ✓ Handles to be ordered separately
- ✓ Compatible with all Europrofile cylinders



## Mortise lock with 3/4" backset for profiles of 1-9/16" or more

FORTYLOCK (Patented)

Mortise lock with 100% stainless steel mechanism. The stainless steel adjustable self-latching bolt and hook combined with the right keep guarantee a strong and solid closed gate where the gate wings can not be pulled apart or forced open. The lock can be installed on metal, aluminum and PVC gates. Thanks to the patented "Click-It" system, installing the lock can be done in a matter of seconds.

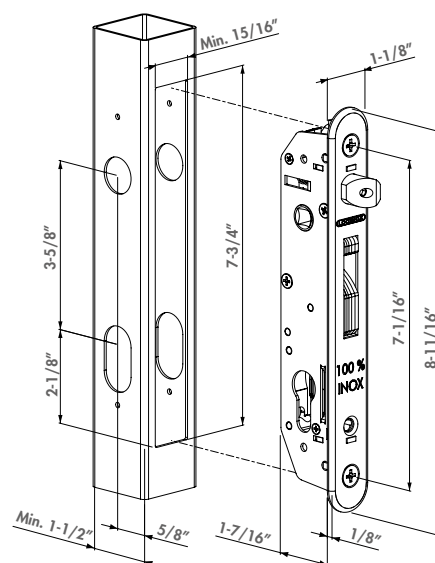

## Recommended keeps



SFKP  
P. 105



SFKI  
P. 104



SFKM  
P. 105

## Order code

Insert lock

**FORTYLOCK** For profiles of 1-1/2"

Fortysets

**FORTYSET-40I-GP-** FORTYLOCK + SFKI + 3020-HYB-STD + 3006G + 3012-54-STD-VSZ

**FORTYSET-40I-MA-** FORTYLOCK + SFKI + 3020-HYB-ALU + 3006M-H + 3012-54-STD-VSZ

**FORTYSET-40P-GP-** FORTYLOCK + SFKI + 3020-HYB-STD + 3006G + 3012-54-STD-VSZ



## Optional cover shields



3020-HYB-A2  
P. 86



3020-HYB-ALU  
P. 86



3020-HYB-STD  
P. 86

## Recommended handles



3006G  
P. 165



3006D  
P. 165



3006J-H  
P. 164



3006I-H  
P. 165



## Mortise lock with 1-3/16" backset for profiles of 2" or more


FIFTYLOCK (Patented)

Prime insert lock with 100% stainless steel mechanism. The stainless steel, adjustable self-latching bolt and hook combined with the correct keep guarantee a strong and solid closed gate where the gate wings can not be pulled apart or forced open. The lock can be installed on metal, aluminum and PVC gates. Thanks to the patented "Click-It" system the lock is mounted in seconds.



### Specifications

- ✓ Stainless steel lock mechanism with cover plate against dirt penetration
- ✓ Stainless steel mechanism, hook, front plate and latch bolt
- ✓ Backset 1-3/16", for mounting in profiles of 2" or more
- ✓ Continuous adjustment of the daybolt up to 3/8" without dismounting the lockbox
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Throw of the hook: 13/16"
- ✓ Center-distance cylinder <=> handles = 3-5/8"
- ✓ Compatible with all Europrofile cylinders
- ✓ Handles to be ordered separately
- ✓ Optional: Cover shield for handle & cylinder holes in aluminum, polyamide or stainless steel

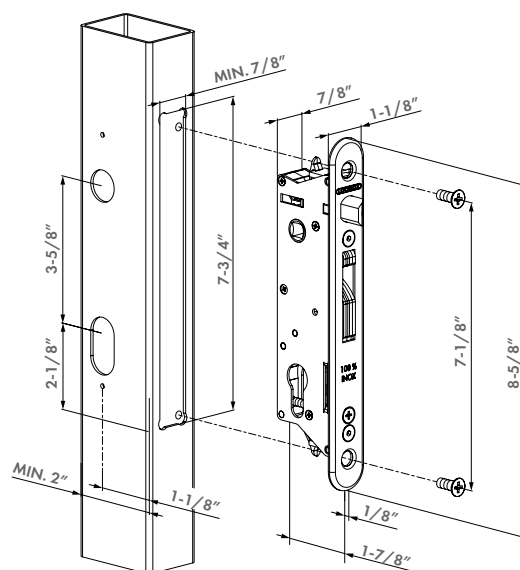

### Recommended keeps



SFKB  
P. 104



SFKI  
P. 104



SFKM  
P. 105

### Order code

**FIFTYLOCK** Mortise lock with 1-3/16" backset for profiles of 2" or more



### Optional cover shields



3020-HYB-A2  
P. 86



3020-HYB-ALU  
P. 86



3020-HYB-STD  
P. 86

### Recommended handles



3006G  
P. 165



3006D  
P. 165



3006J-H  
P. 164



3006I-H  
P. 165



## Insert lock with 1-9/16" backset for profiles of 2-3/8" or more


SIXTYLOCK (Patented)

Prime insert lock with 100% stainless steel mechanism. The stainless steel, adjustable self-latching bolt and hook combined with the right keep guarantee a strong and solid closed gate where the gate wings can not be pulled apart or forced open. The lock can be installed on metal, aluminum and PVC gates. Thanks to the patented "Click-It" system the lock is mounted in seconds.



### Specifications

- ✓ Stainless steel lock mechanism with cover plate against dirt penetration
- ✓ Stainless steel mechanism, hook, front plate and latch bolt
- ✓ Backset 1-9/16", for mounting in profiles of 2-3/8" of depth or more
- ✓ Continuous adjustment of the daybolt up to 3/8" without dismounting the lockbox
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Throw of the hook: 13/16"
- ✓ Center-distance cylinder <=> handles = 3-5/8"
- ✓ Available with 2-1/8", 2-3/8", and 3-1/8" cylinder
- ✓ Handles to be ordered separately
- ✓ Optional: Cover shield for handle & cylinder holes in aluminum, polyamide or stainless steel

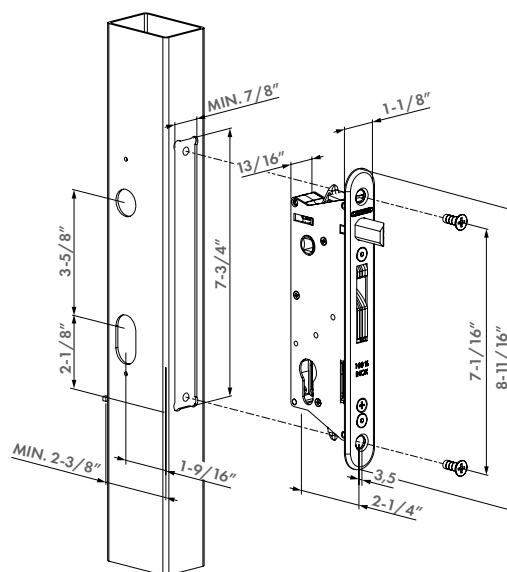

### Recommended keeps



SFKB  
P. 104



SFKI  
P. 104



SFKM  
P. 105

### Order code

**SIXTYLOCK** Insert lock with 1 9/16" backset for profiles of 2 3/8" or more



### Optional cover shields



3020-HYB-A2  
P. 86



3020-HYB-ALU  
P. 86



3020-HYB-STD  
P. 86

### Recommended handles



3006G  
P. 165



3006D  
P. 165



3006I-H  
P. 165



3006J-H  
P. 164





## Mortise lock for ornamental gates

H-METAL (Patented)


Mortise lock with 100% stainless steel mechanism. This model can be installed on steel, aluminum, or wood gates. The massive stainless steel hook and adjustable latch bolt makes this a one of a kind lock. The combination of the hook (dead bolt) with the SHKM or SHKW keep provides a secure anchoring of your gate while preventing the gate from being pried open as the dead bolt's "hook" locks into the keep's anchoring plate. These locks can be used on metal, wood or aluminum gates or even with our fully prepared profiles. The latch gap required is keep dependent, but the SHKM Hybrid keep requires a 7/8" latch gap.

**24h**  
SHIPPING



### Specifications

- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Adjustment of the latch bolt up to 3/4" continuous without removing the lock
- ✓ Stainless steel mechanism, hook, front plate and latch bolt
- ✓ Handles to be ordered separately
- ✓ Throw of the hook: 1-1/4"
- ✓ Center-distance cylinder <=> handles = 3-5/8"
- ✓ Hook in combination with the keep provides secure anchoring
- ✓ With coverplate for lock mechanism protection against dirt penetration inside the posts
- ✓ Available with 2-1/8", 2-3/8", and 3-1/8" cylinder
- ✓ Cover shield for handle & cylinder holes to be ordered separately

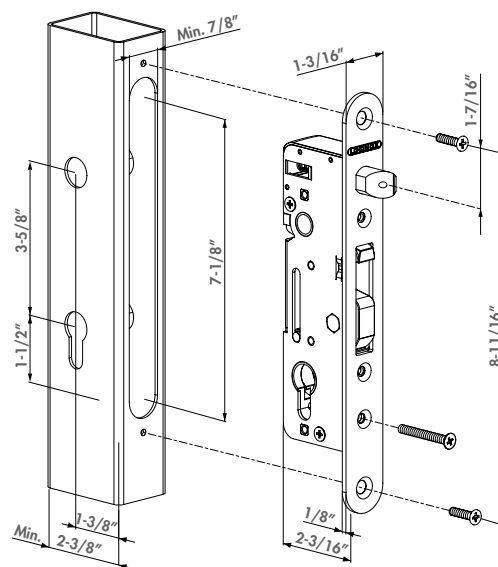

### Recommended keeps



**SHKM**  
P. 101



**HWKB**  
P. 102



**SEH**  
P. 28

### Order codes

Insert lock

**H-METAL** For profiles with a min. depth of 2-1/2" **24h SHIPPING**

Hybrid kits: Insert lock + accessories

**H-METAL-SET-54-M-** H-METAL + 3020-HYB-STD (2x) + 3006M-H + SHKM-ALUM + 3012-54-STD-VSZ

**H-METAL-SET-54-I-** H-METAL + 3020-HYB-A2 (2x) + 3006I-H + SHKM-ALUM + 3012-54-STD-VSZ

**H-METAL-SET-80-M-** H-METAL + 3020-HYB-STD (2x) + 3006M-H + SHKM-ALUM + 3012-80-STD-VSZ **24h SHIPPING**

**H-METAL-SET-80-I-** H-METAL + 3020-HYB-A2 (2x) + 3006I-H + SHKM-ALUM + 3012-80-STD-VSZ **24h SHIPPING**



### Cover shields and accessories



**3020-HYB-A2**  
P. 86



**3020-HYB-ALU**  
P. 86



**3020-HYB-STD**  
P. 86



**HLT**  
P. 85

### Recommended handles



**3006I-H**  
P. 165



**3006M-H**  
P. 164



**3006J-H**  
P. 164



## Mortise lock for ornamental gates, fits welding lock box

H-METAL-WB (Patented)


Mortise lock with 100% stainless steel mechanism. This model can be installed on steel or aluminum gates and fits perfectly into our custom welding box. The massive stainless steel hook and adjustable latch bolt makes this a one of a kind lock. The combination of the hook (dead bolt) with the SHKM or SHKW keep provides a secure anchoring of your gate while preventing the gate from being pried open as the dead bolt's "hook" locks into the keep's anchoring plate. The latch gap required is keep dependent, but the SHKM Hybrid keep requires a 7/8" latch gap.

**24h**  
SHIPPING



### Specifications

- ✓ Insert lock with a backset of 1-3/8"
- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Adjustment of the latch bolt up to 3/4" continuous without removing the lock
- ✓ Stainless steel mechanism, hook, front plate and latch bolt
- ✓ Throw of the hook: 1-1/4"
- ✓ Center-distance cylinder <=> handles = 3-5/8"
- ✓ Hook in combination with the keep provides secure anchoring
- ✓ With coverplate for lock mechanism protection against dirt penetration inside the posts
- ✓ Available with 2-1/8", 2-3/8", and 3-1/8" cylinder
- ✓ Handles to be ordered separately
- ✓ Cover shield for handle & cylinder holes to be ordered separately

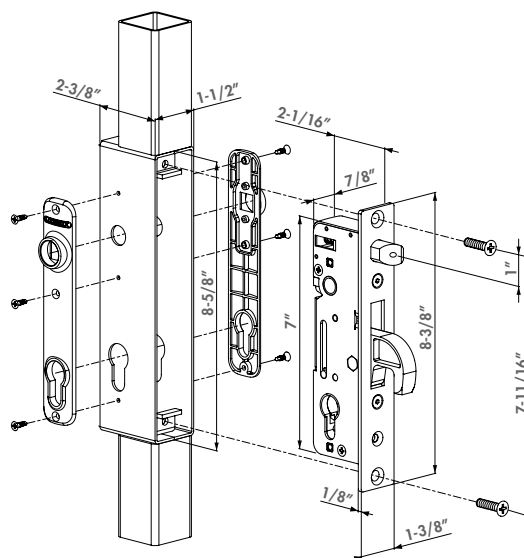

### Recommended keeps



SHKM  
P. 101



HWKB  
P. 102



SEH  
P. 28

### Order code

H-METAL-WB For hybrid welding lock box - HWLB **24h** SHIPPING



### Cover shields and accessories



3020-HYB-A2  
P. 86



3020-HYB-ALU  
P. 86



3020-HYB-STD  
P. 86



HWLB  
P. 85

### Recommended handles



3006I-H  
P. 165



3006M-H  
P. 164




3006J-H  
P. 164



## Gate frame profile for Mortise lock (H-METAL)

HLT

Fully prepared steel profile for Mortise lock. Use this as your gate upright and ensure a perfect and simple installation of the lock without having to do the cut-outs yourself, saving time and money on every gate.

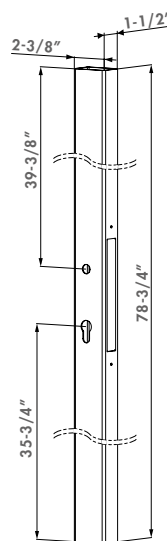

### Specifications

- ✓ Profile cut-out for H-METAL
- ✓ Length: 78-3/4"
- ✓ Fully prepared gate ends simplify building your gates

### Compatible lock and accessories



H-METAL  
P. 83



3020-HYB-A2  
P. 86



3020-HYB-ALU  
P. 86



3020-HYB-STD  
P. 86

### Order code

**HLT** Mild steel welding tube, 78" long, for H-METAL lock




**24h  
SHIPPING**

## Weldable lock box for H-METAL-WB

HWLB

Metal welding box for hybrid Mortise lock.

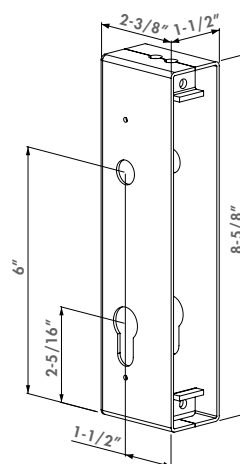

### Specifications

- ✓ Size: 2-3/8" x 1-9/16" x 8-5/8" (5/64" thickness, 14 gauge)
- ✓ Black steel for welding

### Compatible lock and accessories



H-METAL-WB  
P. 84



3020-HYB-A2  
P. 86



3020-HYB-ALU  
P. 86



3020-HYB-STD  
P. 86

### Order code

**HWLB** Mild steel welding lock box for H-METAL-WB lock **24h  
SHIPPING**





**24h  
SHIPPING**


## Cover shield for mortise locks

3020-HYB


Cover shield for handle & cylinder holes of Locinox mortise locks. Available in aluminum, stainless steel or polyamide for an aesthetic finish.

### Specifications

- ✓ Cover shield for handle & cylinder holes
- ✓ Standardised gate pattern: compatible with HLT welding profile and HWLB for Hybrid locks
- ✓ Available in polyamide, aluminum and stainless steel

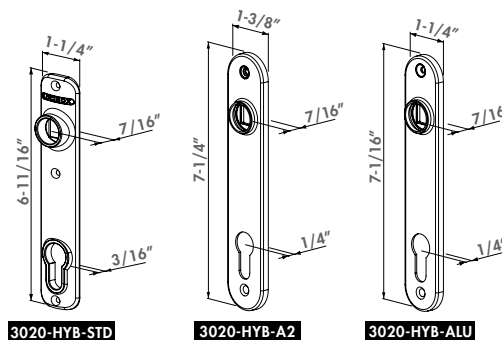

### Compatible locks

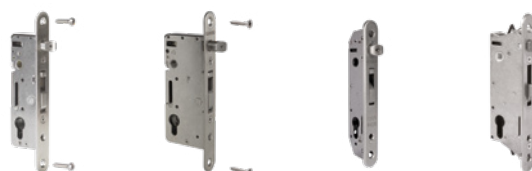

**H-METAL**  
P. 83

**H-WOOD**  
P. 89

**FORTYLOCK**  
P. 80

**SIXTYLOCK**  
P. 82

### Order codes

<b>3020-HYB-A2</b>	Stainless steel cover shields for mortise locks	<b>24h SHIPPING</b>
<b>3020-HYB-ALU</b>	Aluminum cover shield for mortise locks	<b>24h SHIPPING</b>
<b>3020-HYB-STD</b>	Polyamid cover shields for mortise locks	<b>24h SHIPPING</b>





## Mortise Lock without handle for sliding and swing gates


H-COMPACT (Patented)

Mortise lock with 100% stainless steel mechanism. This model is specially designed for mechanical closure of sliding gates and double leaf swinging gates. It can be used for manual locking of automated slide gates. The absence of a handle prevents people from climbing over the fence using the handle as a step. The latch gap required is keep dependent, but the SHKC Hybrid keep requires a 3/8" latch gap.



### Specifications

- ✓ Insert lock with a backset of 1-3/8"
- ✓ Suitable for swing and sliding gates
- ✓ Mechanism, hook, front plate, chassis and all internal mechanical parts are 100% stainless steel
- ✓ Throw of the hook: 1-1/4"
- ✓ Hook in combination with the keep provides secure anchoring
- ✓ Without latch bolt
- ✓ (Removable) pin prevents lifting the hook from the keep when used in a sliding gate
- ✓ With coverplate for lock mechanism protection against dirt penetration inside the posts
- ✓ Compatible with all Europrofile cylinders

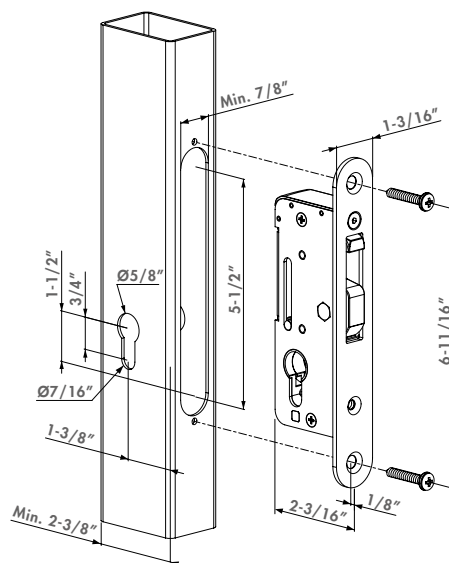

### Recommended keep



SHKC  
P. 103

### Order code

**H-COMPACT** For profiles with a min. depth of 2-1/2"





# i Hardware for wooden gates

Wood is more popular than ever as a construction material in the gate and fence world. Wood lives and therefore it's important to know that **wood swells and shrinks** relative to weather changes. That is why here at Locinox we developed a **range of products for wooden gates** which make sure that your **gate always closes perfectly**, even after 10 years!



100% modular



Time-saving



Left/right reversible

## One wing gate:

### H-WOOD

100% stainless steel insert lock with a backset of 2-3/8". The perfect solution for wooden gates. The adjustable self-latching bolt in combination with the stainless steel hook (dead bolt) provides extra security.

### SHKW

Stainless steel keep for Hybrid insert locks. This unique keep in combination with the Hybrid lock ensures a strong gate anchoring. This configuration is with wood screws for wooden posts.

### MAMMOTH-180

An elegant self-closing hinge which opens smoothly and closes consistently gates up to 330 lbs and this regardless of the outside temperatures (patented system). Force, closing speed and final snap are all individually adjustable.



① SHKW: p. 103

② H-WOOD: p. 89

③ MAMMOTH-180: p. 15

④ DINO: p. 126



① 4DW: p. 128

② VSF: p. 141

③ SHKW: p. 103

④ H-WOOD: p. 89

## Double wing gate:

### 4DW

Aesthetic, vandal proof hinge for wooden gates. The stainless steel hinge can be adjusted in 4 dimensions. Height, depth, left/right alignment and rotational direction can be adjusted.

### VSF

Standard drop bolt with hot-dip galvanized bolt. The drop bolt is auto-locked between the gate wings.





## Mortise lock for wooden gates


H-WOOD (Patented)

Mortise lock with 100% stainless steel mechanism. This model is specially designed for wood gates. The adjustable latch bolt in combination with the stainless steel hook (dead bolt) provides extra security. The combination of the hook (dead bolt) with the SHKW keep provides a secure anchoring of your gate while preventing the gate from being pried open as the dead bolt's "hook" locks into the keep's anchoring plate. The latch gap required is keep dependent, but the SHKW Hybrid keep requires a 7/8" latch gap.



### Specifications

- ✓ Easy left or right changing of the self-latching daybolt
- ✓ Key-operated self-latching bolt, allows Free Exit application
- ✓ Adjustment of the latch bolt up to 3/4" continuous without removing the lock
- ✓ Stainless steel mechanism, hook, front plate and latch bolt
- ✓ Stainless steel hook for night locking (dead bolt)
- ✓ Throw of the hook: 1-1/4"
- ✓ Center-distance cylinder <=> handles = 3-5/8"
- ✓ 2-3/8" backset handle
- ✓ Lock mechanism with cover plate protects against dirt penetration
- ✓ Compatible with all Europrofile cylinders
- ✓ Handles to be ordered separately
- ✓ Cover shield for handle & cylinder holes to be ordered separately

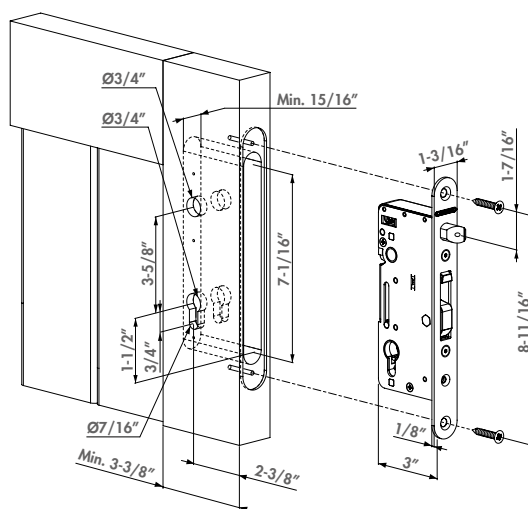

### Recommended keeps



**SHKW**  
P. 103



**SEH**  
P. 28

### Order codes

Insert lock

**H-WOOD** For profiles with a min. depth of 4"

Hybrid kits: Insert lock + accessories

**H-WOOD-SET-60-I-** H-WOOD + 3020-HYB-A2 (2x) + 3006I-H + SHKW-ALUM + 3012-60-STD-VSZ

**H-WOOD-SET-80-I-** H-WOOD + 3020-HYB-A2 (2x) + 3006I-H + SHKW-ALUM + 3012-80-STD-VSZ



### Optional cover shields



**3020-HYB-A2**  
P. 86



**3020-HYB-ALU**  
P. 86



**3020-HYB-STD**  
P. 86

### Recommended hinges and handles



**3DW**  
P. 128



**4DW**  
P. 128



**3006I-H**  
P. 165



**3006J-H**  
P. 164



# Keeps

---

No lock without a keep. Locinox provides a wide range of keeps for sliding, swing, garden and child safety gates. An impact test at our facility ensures our keeps to handle every blow they receive and they meet our strict Locinox standard. Mounting is easy, fast and very strong thanks to our patented Quick-Fix system. The stop plates are adjustable and in many cases equipped with a protective rubber strip.

---



93 Keeps for swing gate locks



96 Keeps for child safety locks



98 Keeps for sliding gate locks


101 Keeps for insert locks



# i Minimal distances

Perfect work begins with a perfect preparation!

All Locinox products can be adjusted accurately. We recommend however to consider the mounting depth when planning. Below, you will find a clear overview of the minimum distances between gate and post. This guarantees that all is perfectly aligned.

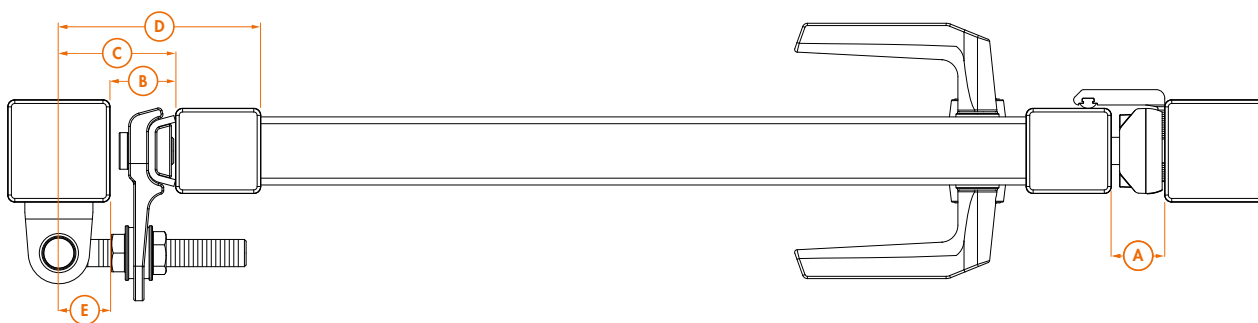

## Hinges

	B	C	D	E
	MINIMUM	MAXIMUM	MAXIMUM	MINIMUM
GBMU4D12	7/8"	3-1/8"	-	13/16"
GBMU4D16	1-3/8"	4-1/2"	-	1"
GBMU4D20	1-3/8"	5-1/8"	-	1"
BOLTON4D-12	1/4"	2-3/4"	-	1-1/8"
BOLTON4D-16	1/4"	3-1/2"	-	1-1/8"
GBMU-X-M12	1/4"	3"	-	13/16"
GBMU-X-M16	5/16"	3-3/4"	-	1"
GBMU-X-M18	5/16"	3-7/16"	-	1"
GBMU-X-M20	1/2"	4-3/8"	-	1"
GBMU-X-M22	1/2"	4-3/8"	-	1-3/16"
G90Z-X-M16	1-7/8"	1-3/16"	-	11/16"
G90Z-X-M20	2-1/16"	1-1/8"	-	15/16"
DINO	1/2"	1-11/16"	-	15/16"
PUMA	3/8"	13/16"	-	-
BEARING HINGE 40X40	1"	1"	-	2-3/8"
BEARING HINGE 50X50	13/16"	13/16"	-	2-1/8"
3DM	5/8"	3"	-	3/8"
4DW	0	1"	-	13/16"
3DW	0	1"	-	3/8"
GBM12X130 30X30	9/16"	-	4-11/16"	13/16"
GBM12X130 40X40	3/8"	-	4-11/16"	13/16"
GBM12X150 30X30	9/16"	-	5-1/2"	13/16"
GBM12X150 40X40	3/8"	-	5-1/2"	13/16"
GBM16X160 40X40	5/8"	-	5-7/8"	1"
GBM16X160 50X50	1/2"	-	5-7/8"	1"
GBM16X180 40X40	5/8"	-	6-5/8"	1"
GBM16X180 50X50	1/2"	-	6-5/8"	1"
GAM12X130	1-13/16"	-	4-11/16"	13/16"
GAM12X150	1-13/16"	-	5-1/2"	13/16"

## Keeps

	A
	MINIMUM
SAKL QF	1-3/16"
SHKL QF	1-3/16"
SMKL QF	1-3/16"
SKRZ	1-1/16"
SE & SEH	1"
SPKZ	5/16"
SSKZ	13/16"
ST	1-1/16"

## Keeps

	A
	MINIMUM
MODULEC-SA	1-3/16"
MODULEC-SH	1-3/16"
SHKM	9/16"
SHKW	9/16"
SHKC	1/4"
SFKI	1/2"
SFKP	1-3/16"
SFKB	1-3/16"
SFKM	1/2"

## Hinges

	B	C	D	E
	MINIMUM	MAXIMUM	MAXIMUM	MINIMUM
SWING130	3/8"	-	4-11/16"	13/16"
SWING150	3/8"	-	5-1/2"	13/16"
G-ORNA-M20	1-3/8"	2-7/16"	-	1-5/8"
G-ORNA-M24	1-3/8"	2-3/4"	-	1-3/4"
G-ORNA-M27	1-1/4"	3-7/16"	-	1-13/16"
G90LR-X-M16-65	2-1/16"	2-3/8"	-	11/16"
G90LR-X-M16-110	2-1/16"	4-1/8"	-	11/16"
G90LR-X-M16-150	2-1/16"	5-11/16"	-	11/16"
G90LR-X-M20-67	2-1/2"	2-3/8"	-	7/8"
G90LR-X-M20-150	2-1/2"	5-11/16"	-	7/8"
G90WP-B-M16-65	2-3/8"	2-9/16"	-	11/16"
G90WP-B-M16-110	2-3/8"	4-3/8"	-	11/16"
G90WP-B-M16-150	2-3/8"	5-7/8"	-	11/16"
G90WP-B-M20-67	3"	2-5/8"	-	7/8"
G90WP-B-M20-150	3"	5-7/8"	-	7/8"



**24h  
SHIPPING**

#### Stop plate color options



#### Specifications

- ✓ Tested up to 500 000 movements
- ✓ Fast and easy fixation with Quick-Fix
- ✓ 660 lbs. holding force on the latch bolt
- ✓ Same drilling pattern as SA, SH and SM keeps
- ✓ Easy left or right hand changing
- ✓ Corrosion-resistant: black anodized housing
- ✓ Adjustable for profiles: 1-1/2" to 2-1/2"
- ✓ Voltage: 12V-24V AC/DC
- ✓ Consumption: 12V - 1,25A / 24V - 0,62A
- ✓ Power: 15W


#### Order code

**MODULEC-SA-E** Fail Close for surface mounted gate locks, 12-24V AC/DC  
**MODULEC-SA-R** Fail Open for surface mounted gate locks, 12-24V AC/DC

## Surface mounted electric strike

MODULEC-SA (Patent pending)

Electric Strike for surface mounted locks. Fast and easy installation thanks to the Quick-Fix. Easily interchanged with the SA keep. Can be connected to both 12V - 24V and AC/DC. Modulec-SA is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

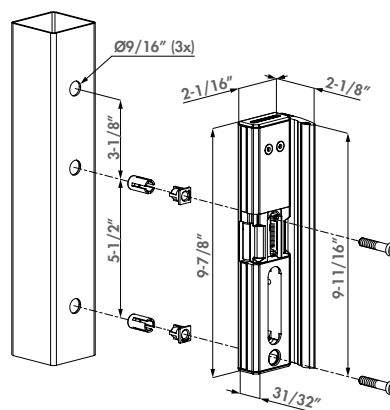

#### Compatible locks



**24h  
SHIPPING**

#### Stop plate color options



#### Specifications

- ✓ Tested up to 500 000 movements
- ✓ 660 lbs. holding force on the latch bolt
- ✓ Fast and easy installation with Quick-Fix
- ✓ Same drilling pattern as SA, SH and SM keeps
- ✓ Easy left or right hand changing
- ✓ Corrosion-resistant: black anodized housing
- ✓ Adjustable for profiles: 1-1/2" to 2-1/2"
- ✓ Voltage: 12V-24V AC/DC
- ✓ Consumption: 12V - 1,25A / 24V - 0,62A
- ✓ Power: 15W


#### Order code

**MODULEC-SH-E** Fail Close for surface mounted gate locks, 12-24V AC/DC  
**MODULEC-SH-R** Fail Open for surface mounted gate locks, 12-24V AC/DC

## Surface mounted electric strike with security mushroom

MODULEC-SH (Patent pending)

Replace your SHKL keep with an electrical surface mounted keep with Fail Close / Fail Open functionality. Easy to install thanks to the patented Quick-Fix. For 12V-24V and AC/DC. Modulec-SH is available in two versions: E (Emissa - Fail Close) and R (Rupture - Fail Open).

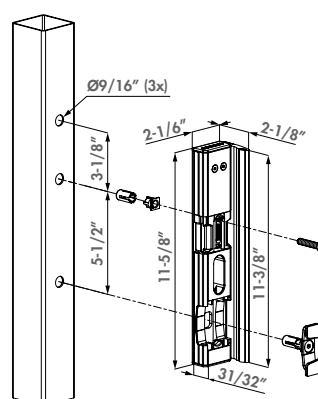

#### Compatible locks






## Electric strike for surface mounted locks

SE (Patented)

Electric strike for swing gates. Equipped with a double blocking system which will resist to up to 1000 lbs of pulling force. The deadbolt receiver has been reinforced with stainless steel, making it more robust and extremely strong. The ideal solution for your access control. SE is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

### Specifications

- ✓ Type SE.E: Emissa - Fail Close
- ✓ Type SE.R: Ruptura - Fail Open
- ✓ Deadbolt receiver reinforced and in stainless steel
- ✓ For profiles 2" and larger
- ✓ Voltage: 12V AC/DC
- ✓ Current Emissa: 1A
- ✓ Current Ruptura: 1.5A
- ✓ Water resistant & weatherproof
- ✓ Pressure resistance on self-latching bolt: 1000 lbs

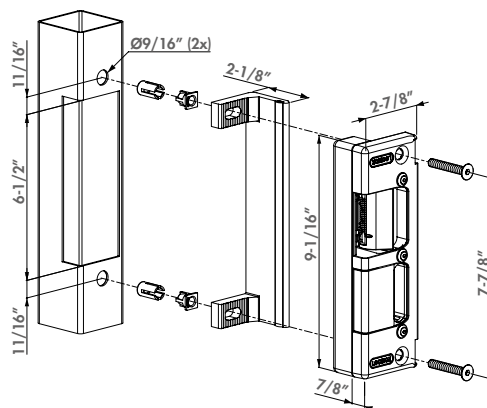

### Compatible locks



### Order codes

- SE-E** Electric strike, Emissa, Fail Close  
**SE-R** Electric strike, Ruptura, Fail Open



## Pull Counter Box

3006PC


Aesthetic solution in aluminum for the construction of symmetric double swing gates in combination with the Locinox keep. If used with the Locinox 4D-hinges, you can simplify your production of double gates to one single identical gate wing which can be used either on the left or right side. The pull counter box fills up the symmetric lock opening in the other gate wing.

### Color options

- 6005** **6009** **9005** **9010** **7016** **ZILV**

### Specifications

- ✓ Metal folded counter box to pull the gate open, designed in the same shape as the industrial lock for perfect symmetry
- ✓ To use in combination with the SA or the SH keep with the special through and through fixing

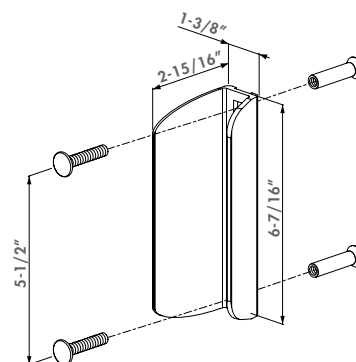

### Compatible locks



### Order code

- 3006PC** Folded counter box in aluminum with through and through fixing





## Adjustable keep out of stainless steel

SAKL QF (Patented)

Stainless steel keep with polyamide finish. Used as a standard for all your gates (garden, ornamental, industrial,...) The unique Quick-Fix ensures a fast and strong installation. The adjustable, aluminum stopplate with rubber accepts different gate profiles (1-1/2" to 2-1/2"). Redesigned to make the latch bolt fall into the keep easier.


**24h  
SHIPPING**

### Stop plate color options

ALUM 6005 6009 9005 9010 7016

### Specifications

- ✓ Stainless steel keep with polyamide finishing
- ✓ Stop plate in extruded aluminum with rubber strip
- ✓ Easy left or right hand changing
- ✓ Innovative Quick-Fix mounting
- ✓ Adjustable for profiles: 1-1/2" to 2-1/2"
- ✓ For rectangular and round profiles

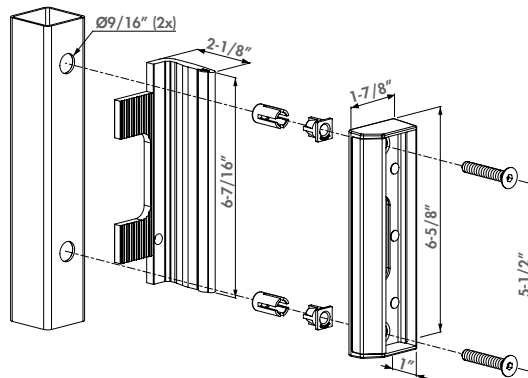

### Compatible locks



LAKQ U2  
P. 59

LMKQ V2  
P. 66

LFKQ X1  
P. 67

LAKZ P1  
P. 72

### Order codes

SAKL QF Industrial keep for square profiles **24h  
SHIPPING**

SARL QF Industrial keep for round profiles **24h  
SHIPPING**



**24h  
SHIPPING**

## Adjustable security keep out of stainless steel

SHKL QF (Patented)


The aluminum security keep is used as a standard for industrial and chain link gates as well as any gate where higher security is desired. The patented stainless steel anchoring system prevents prying the gates open and eliminates the need to install a transom over the gate. The unique Quick-Fix bolt ensures a fast and strong installation. The adjustable stop plate with rubber bumper adjusts to gate profiles up to 2-1/2" and fits on all latch posts 1-1/2" or larger. Latch gap: 1-1/4"

### Stop plate color options

ALUM **24h  
SHIPPING** 6005 6009 **24h  
SHIPPING** 9005 9010 7016

### Specifications

- ✓ Reinforced stainless steel security keep for round and square profiles
- ✓ Stainless steel anchoring system included
- ✓ Stainless steel adjustable strike plate with shock rubber for noise dampening
- ✓ Easy left or right hand changing
- ✓ Innovative Quick-Fix mounting
- ✓ Prevents opening the gate with a crowbar
- ✓ For rectangular and round profiles
- ✓ Adjustable for gate profiles: 1-1/2" to 2-1/2"

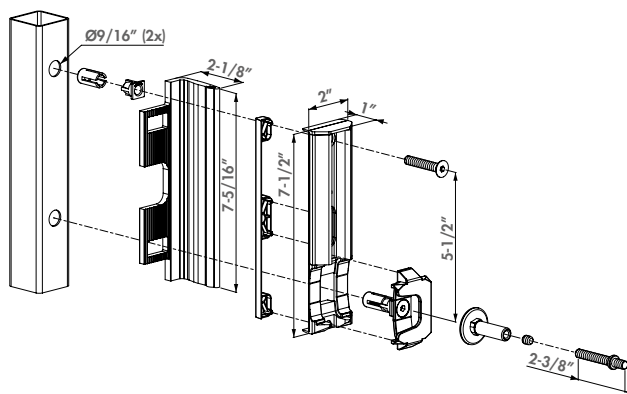

### Compatible locks



LAKQ U2  
P. 59

LMKQ V2  
P. 66

LDKZ D1  
P. 65

LEKQ U4  
P. 68

### Order codes

SHKL QF Industrial security keep for square profiles **24h  
SHIPPING**

SHRL QF Industrial security keep for round profiles **24h  
SHIPPING**



## Polyamide gate keep for rectangular profiles

SMKL QF


Polyamide keep for walk and garden gates. This economical gate stop and receiver is typically used in conjunction with the polyamide bodied garden gate lock LAKZ P1. The unique Quick-Fix bolt ensures a fast and strong installation. This keep is designed for gate profiles 1-1/2" and fits on all latch posts 1-1/2" or larger.

### Color options

6005 6009 9005 9010 7040 7016

### Specifications

- ✓ Keep in polyamide for square profiles
- ✓ Easy left or right hand changing
- ✓ Innovative Quick-Fix mounting
- ✓ For gate profiles 1-1/2" or more

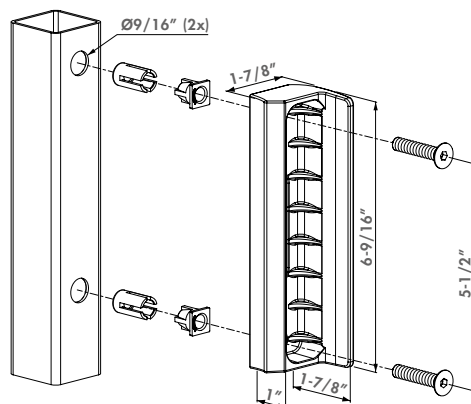

### Compatible locks



LAKZ P1  
P. 72

LAKZ P1 WSI  
P. 73

### Order code

SMKL QF Polyamide garden gate keep for square profiles



## Polyamide gate keep for round profiles

SKRZ


Polyamide keep for walk and garden gates. This economical gate stop and receiver is typically used in conjunction with the polyamide bodied garden gate lock LAKZ P1. The U-Bolt mount ensures a fast and strong installation on round tube. This keep is designed for gate profiles 1-1/2" and latch post profiles 2-3/8" round. Latch gap: 7/8"

### Color options

6005 6009 9005 7040

### Specifications

- ✓ Keep in polyamide for round profiles
- ✓ Easy left or right hand changing
- ✓ Only for round posts Ø2-3/8"
- ✓ For gate profiles of 1-1/2" width

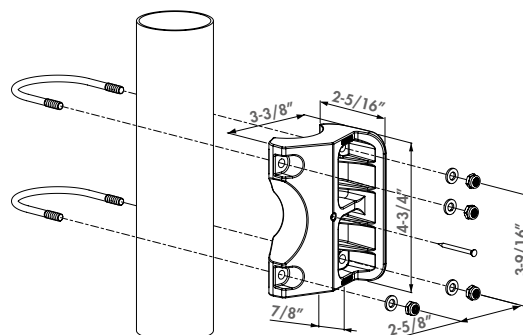

### Compatible locks



LAKZ P1  
P. 72

LAKZ P1 WSI  
P. 73

### Order code

SKRZ Polyamide garden gate keep for round profiles

## Ornamental keep

SPKZ QF

Flat stainless steel strike plate with polyamide insert that fits into the post for a clean, finished look. This keep allows you to align your ornamental gates with a minimum latch gap in between. This strike plate does not have an integrated gate stop, so the gate can swing through. Quick-Fix bolts are provided. Latch gap: 1/4"


**24h**  
**SHIPPING**

### Color options



## Specifications

- ✓ Insert keep for square profiles of 1-9/16"
- ✓ Innovative Quick-Fix mounting

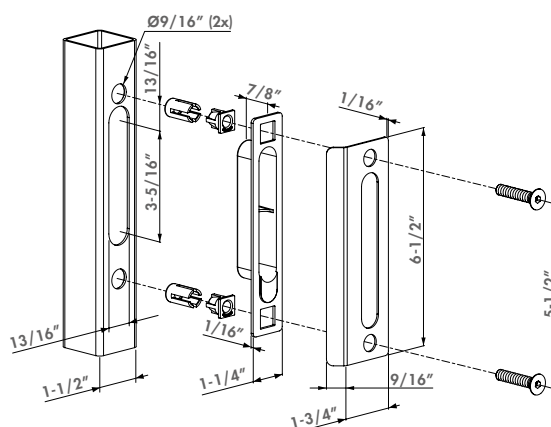

## Compatible locks



LAKQ H2  
P.71



LAKY F2  
p.70



LAKQ U2  
P. 59

LMKQ V2  
P. 66

## Order code

**SPKZ QF 40** Insert keep for square profiles of 1-1/2" **24h**  
SHIPPING




**24h**  
**SHIPPING**

### Strike Plate with counter lock box

SPKZ-TK

Flat stainless steel strike plate with polyamide insert that fits into the post for a clean, finished look. This keep allows you to align your ornamental gates with a minimum latch gap in between and offers you a nice aesthetical look for double gates with the ornamental counter box opposite the lock. This strike plate does not have an integrated gate stop, so the gate can swing through. Latch gap: 1/4"

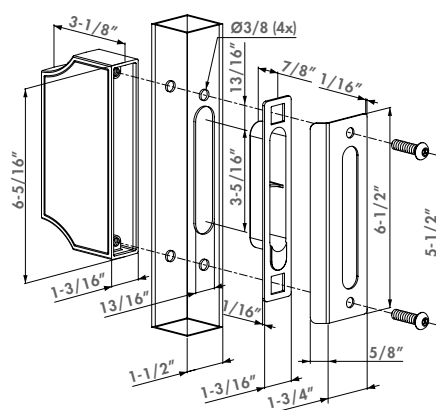

## Compatible locks



LAKQ H2  
P.71



LAKY F2  
p. 70

## Order code

**SPKZ TK 40** Insert keep and ornamental counter lock box for square profiles of 1-1/2" **24h**  
GUARDING





**24h  
SHIPPING**


### Specifications

- ✓ Keep in stainless steel for square profiles
- ✓ Minimum profile size: 3" wide
- ✓ Fast and easy fixation with Quick-Fix
- ✓ The keep is 3/8" left/right auto-adjustable for easy and secure anchoring of the Twistfinger
- ✓ The rubber stop prevents damaging the gateframe

## Sliding gate keep with Quick-Fix

SSKZ QF (Patented)

Stainless steel sliding keep for hollow posts. The keep is 5/8" auto-adjustable left/right for an easy and secure anchoring of the gate lock. A rubber stop prevents the gate from being damaged in closed position.

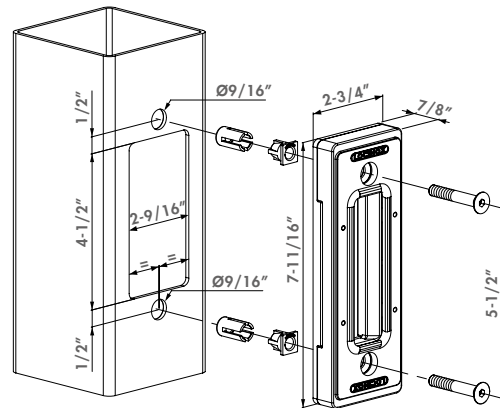

### Compatible locks



LLKZ V2  
P. 76



LSKZ U2  
P. 78



LGKZ D1  
P. 79

### Order code

**SSKZ QF** Sliding gate keep for square profiles with a min. width of 3" **24h  
SHIPPING**

## Aluminum adapter case for SSKZ QF for flat profiles

O-SET


Adapter for the SSKZ QF sliding gate keep. Can be used when mounting the keep on flat profiles or if you want the keep surface mounted.



**24h  
SHIPPING**

### Specifications

- ✓ Aluminum case to use together with sliding gate keep SSKZ QF when installing on a flat profile
- ✓ Protects the Twistfinger when the keep is mounted on a flat profile with a minimum thickness of 1/4" and a maximum thickness of 3/4"
- ✓ Delivered with through and through fasteners

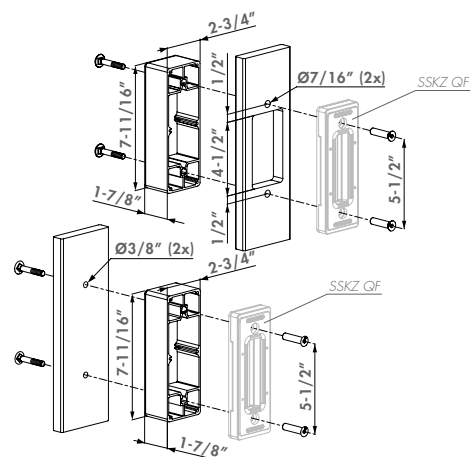

### Recommended keeps



**SSKZ QF**  
P. 98

### Order code

**O-SET** Aluminum cover box for catch bolt protection **24h  
SHIPPING**



#### Color options

**9005**

#### Specifications

- ✓ Keep in polyamide for square profiles 1-1/2" or larger
- ✓ For 1-1/2" gate profiles only
- ✓ Only compatible with the swimming pool lock TWIST40
- ✓ Innovative Quick-Fix mounting
- ✓ Conforms to swimming pool standard NF P90-306
- ✓ We strongly advise you to read the swimming pool standard NF P90-306 before manufacturing any swimming pool gate


#### Order code

**STK QF** Keep for TWIST40 pool lock, Fits min 1-1/2" square profiles

### Keep for square profiles for TWIST40

STK QF (Patented)

This polyamide keep conforms to the European swimming pool standard NF P90-306. It is designed to work with the TWIST40 swimming pool lock. Fast and strong installation on square posts using our patented Quick-Fix bolts. For gate profiles 1-1/2" only. Latch gap: 1-1/4"

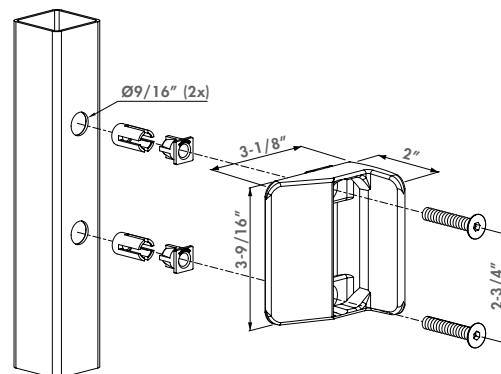

Compatible lock



**TWIST40**  
P. 74



#### Color options

**9005**

#### Specifications

- ✓ Keep in polyamide for round profiles Ø2-3/8"
- ✓ For 1-1/2" gate profiles only
- ✓ Only compatible with the swimming pool lock TWIST40
- ✓ Innovative Quick-Fix mounting
- ✓ Conforms to swimming pool standard NF P90-306
- ✓ We strongly advise you to read the swimming pool standard NF P90-306 before manufacturing any swimming pool gate


#### Order code

**STR60 QF** Keep for TWIST40 pool lock, Fits 2-1/2" round latch posts only

### Keep for round profiles for TWIST40

STR60 QF (Patented)

This polyamide keep conforms to the European swimming pool standard NF P90-306. It is designed to work with the Twist40 swimming pool lock. Fast and strong installation on 2-3/8" diameter round tubes using our patented Quick-Fix mounting hardware. For gate profiles 1-1/2" only. Latch gap: 1-1/4"

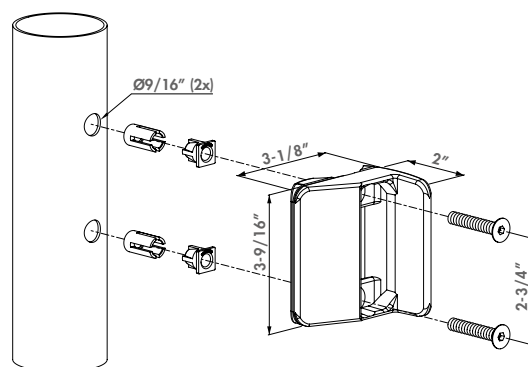

Compatible lock



**TWIST40**  
P. 74










## Electric strike for mortise locks

SEH (Patented)

Electric strike for swing gates using our Hybrid Mortise locks. The strike is equipped with a double blocking system which supports 1000 lb pulling force. This keep is extremely strong and the ideal solution for your access control installations. The electric strike is available in a Fail Secure or Fail Safe model. Latch gap: 1". SEH is available in two versions: E (Emissa - Fail Close) and R (Ruptura - Fail Open).

### Specifications

- ✓ Type SEH.E: Emissa - Fail Close
- ✓ Type SEH.R: Ruptura - Fail Open
- ✓ Easy left or right hand changing
- ✓ For profiles 2" and larger
- ✓ Voltage: 12V AC/DC
- ✓ Current Emissa: 1A
- ✓ Current Ruptura: 1.5A
- ✓ Water resistant & weatherproof
- ✓ Pressure resistance on self-latching bolt: 1000 lbs

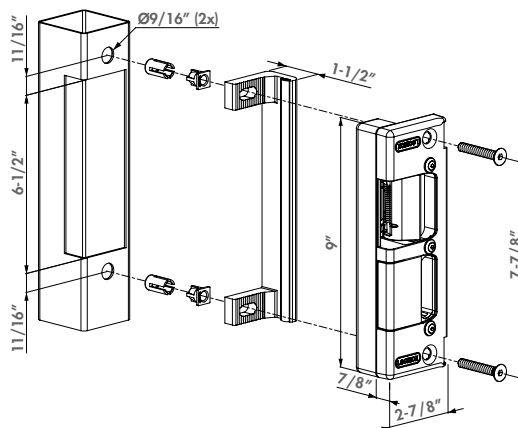

### Compatible locks



**H-METAL**  
P. 83



**H-METAL-WB**  
P. 84



**H-WOOD**  
P. 89

### Order codes

**SEH-E** Electric strike, Emissa, Fail Close for H-Metal and H-Wood

**SEH-R** Electric strike, Ruptura, Fail Open for H-Metal and H-Wood



**24h  
SHIPPING**

## Hybrid keep for insert locks

SHKM (Patented)


Aluminum keep for Hybrid mortise locks. This unique keep combined with the Hybrid lock ensures a strong anchoring. With Quick-Fix for metal and aluminum posts.

### Stop plate color options



### Specifications

- ✓ Adjustable for profiles: 1-1/2" to 2-1/2"
- ✓ Innovative Quick-Fix mounting
- ✓ Anchoring plate for hook
- ✓ Easy left or right hand changing

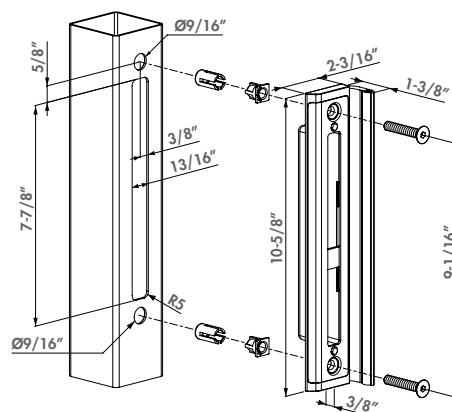

### Compatible lock and accessories



**H-METAL**  
P. 83



**H-METAL-WB**  
P. 84



**HKT**  
P. 102

### Order code

**SHKM** For square posts in combination with H-METAL lock **24h  
SHIPPING**



**24h  
SHIPPING**


### Specifications

- ✓ Weld box for Hybrid Keep in black steel to weld into the latch post. 2-3/8" x 1-9/16", 1/16"
- ✓ Front plate in stainless steel
- ✓ Integrated gate stop with 2 rubber stoppers
- ✓ For gate profiles of 1-1/2" width

## Weldable lock box with keep/stop for Mortise lock

HWKB

Hybrid keep for Hybrid mortise lock. The welding box in black steel 2-3/8" x 1-9/16", 1/16" thick can be welded into the latch post. The strike plate in stainless steel with integrated stop ensures a finished look and smooth locking. Latch gap: 1/4"

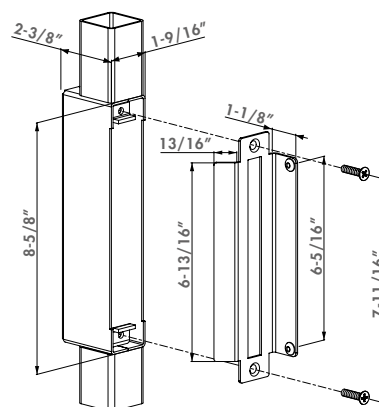

### Compatible locks



H-METAL  
P. 83



H-METAL-WB  
P. 84

### Order code

**HWKB** Keep & welding box for hybrid mortise lock **24h  
SHIPPING**




### Specifications

- ✓ Profile cut-out for Hybrid Keep: SHKM
- ✓ Length: 78-3/4"
- ✓ Fully prepared gate ends simplify building your gates

## Gate frame/post profile for Mortise keep

HKT

Fully prepared steel profile for Mortise keep. Especially useful for double leaf gates, use this as your gate upright and ensure a perfect and simple installation of the keep without having to do the cut-outs yourself, saving time and money on every gate.

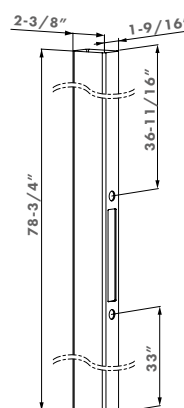

### Recommended keeps



SHKM  
P. 101

### Order code

**HKT** Mild steel welding tube, 78" long, for SHKM Keep




## Stainless steel keep for H-COMPACT

SHKC

Stainless steel keep for the H-COMPACT insert lock. The 1-9/32" throw of the hook and the anti-lift protection provide a secure anchoring. Latch gap: 3/8"

### Specifications

- ✓ Plastic box prevents intrusion of dirt or water in the profile
- ✓ 15/64" thick front plate
- ✓ Can be used for swing and slide gates
- ✓ Innovative installation with Quick-Fix
- ✓ The strike presents a safe solution and prevents lifting the gate out of position.

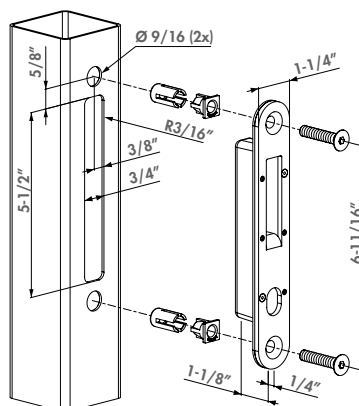

Compatible lock



H-COMPACT

P. 87

### Order code

**SHKC** For square posts with a min. width of 1-1/2" in combination with H-COMPACT lock



## Hybrid keep for wood

SHKW


Aluminum keep for our Hybrid Mortise locks. This unique keep is left and right hand reversible and comes with an adjustable stop plate that fits 1-1/2" to 2-1/2" gate profiles. When used in combination with the Hybrid lock this keep ensures strong gate locking while preventing the gate from being pried open as the dead bolt's "hook" locks into the keep's anchoring plate. This model comes with wood screws for installation on wooden posts. Latch gap: 7/8"

### Color options

**9005** **ALUM**

### Specifications

- ✓ Stainless steel keep for Hybrid locks
- ✓ With mounting screws for wood
- ✓ Supplied with stop plate if integrated stop is not provided
- ✓ For 1-1/2" to 2-1/2" gate profiles
- ✓ Anchoring plate for hook

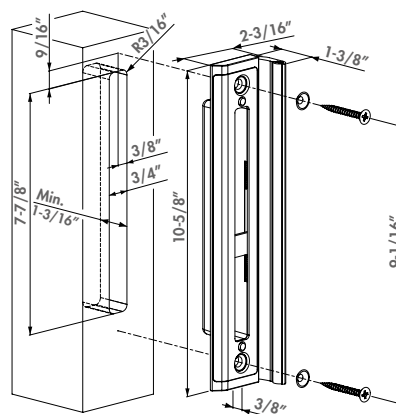

Compatible lock



H-WOOD

P. 89



H-METAL

P. 83

### Order code

**SHKW** For wooden posts in combination with H-WOOD lock






**24h  
SHIPPING**

### Specifications

- ✓ Keep for square profiles
- ✓ Aluminum slam plate with shock rubber
- ✓ Innovative installation with Quick-Fix
- ✓ To combine with Fortylock, Fiftylock and Sixtylock
- ✓ Stainless steel anchoring system included
- ✓ Easy left or right hand changing
- ✓ Prevents opening the gate with a crowbar
- ✓ Adjustable for profiles: 1-1/2" to 2-1/2"

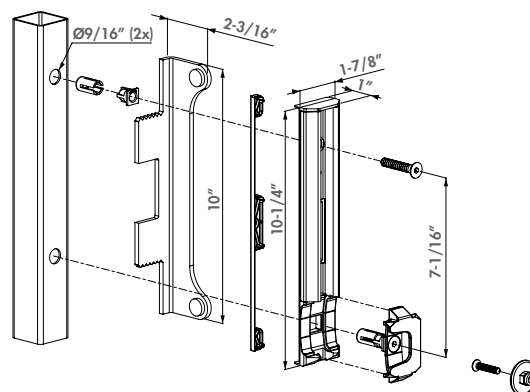

### Compatible lock



**FORTYLOCK**  
P. 80



**FIFTYLOCK**  
P. 81



**SIXTYLOCK**  
P. 82

### Order code

**SFKB-QF** For profiles 1-1/2" to 2-1/2"




## Insert stainless steel strike for Fortylock, Fiftylock and Sixtylock

SFKI

Insert keep for small gates in metal, aluminum and PVC. The keep can be combined with the FortyLock, Fiftylock and Sixtylock. Fast and easy mounting with Quick-Fix. Hook of FortyLock in combination with the keep provides a secure anchoring of gate and post. Available for square posts of 1-3/16" or 1-1/2".

### Specifications

- ✓ Keep for square profiles
- ✓ Innovative installation with Quick-Fix
- ✓ Easy left or right hand changing
- ✓ Insert depth: 9/16"
- ✓ Available for profiles 1-3/16" or 1-9/16"

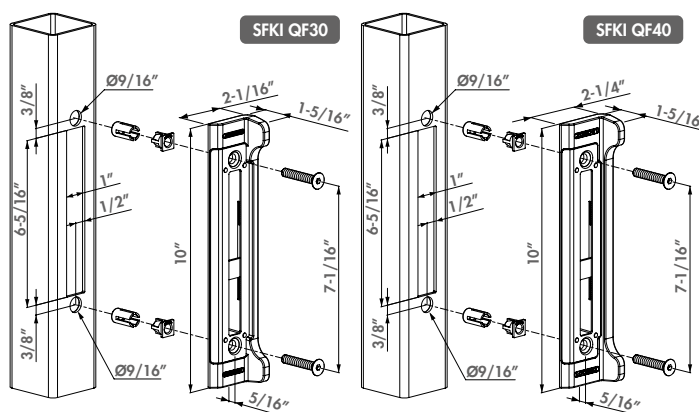

### Compatible locks



**FORTYLOCK**  
P. 80



**FIFTYLOCK**  
P. 81



**SIXTYLOCK**  
P. 82

### Order codes

**SFKI-QF30** For square gate profiles 1-1/8" x 1-1/8"

**SFKI-QF40** For square gate profiles 1-1/2" x 1-1/2" **24h  
SHIPPING**




## Polyamide keep for Fortylock, Fiftylock and Sixtylock

SFKP

Polyamide keep for walk- and garden gates. To combine with Fortylock, Fiftylock and Sixtylock. The Quick-Fix ensures a fast and strong mounting on square posts. For gate profiles 1-1/2".

### Specifications

- ✓ Keep for square profiles of 1-9/16"
- ✓ Standard measure between fixings: 5-1/2"
- ✓ Innovative installation with Quick-Fix
- ✓ Easy left or right hand changing

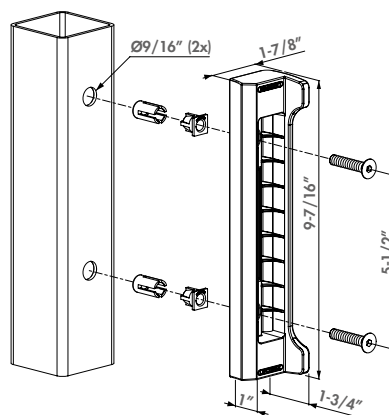

Compatible lock



FORTYLOCK  
P. 80



FIFTYLOCK  
P. 81



SIXTYLOCK  
P. 82

### Order code

**SFKP-QF40** For square gate profiles 1-1/2" x 1-1/2"



**NEW**

## Stainless steel surface mounted keep for Fortylock, Fiftylock and Sixtylock


SFKM

Aesthetical surface mounted keep for small metal, aluminum and PVC gates. Specially designed for Fortylock, Fiftylock and Sixtylock insert locks. The limited 5/16" depth ensures a discreet look. A highly efficient assembly with minimal gate preparations is guaranteed, while the unique Quick-Fix ensures a fast and strong fixation on the gate. This unique keep in combination with the insert lock ensures a strong gate anchoring.

**24h  
SHIPPING**

### Specifications

- ✓ Stainless steel keep for square profiles as of 1-9/16"
- ✓ Compatible with Fortylock, Fiftylock and Sixtylock insert locks
- ✓ Extruded stop plate in aluminum with rubber strip for longterm use
- ✓ Including innovative Quick-Fix fixations and self drilling screws
- ✓ Easy left or right hand changing
- ✓ Elegant design: visible thickness of 5/16"
- ✓ Adjustable stop plate for 1-1/2" to 2-1/2" gate frames
- ✓ Adjustable guide to avoid damage of day bolt to post

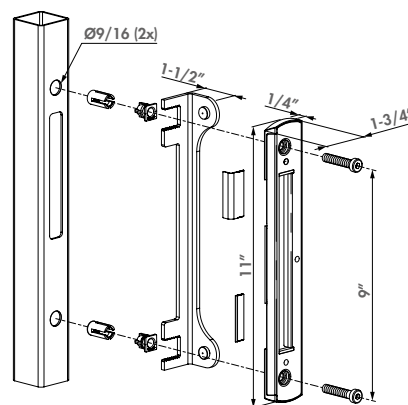

Compatible locks



FORTYLOCK  
P. 80



FIFTYLOCK  
P. 81



SIXTYLOCK  
P. 82

### Order codes

**SFKM-QF** Stainless steel surface mounted keep for Fortylock, Fiftylock and Sixtylock







# Hinges

---

Hinges support the weight of the gate and ensure it to open & close smoothly. Because of this heavy task, our hinges are hot-dip galvanized or made of stainless steel. Thanks to our wide range we can offer a solution for every situation. Top of the line is the patented 4D hinge. This hinge is adjustable in 4 dimensions (height/depth /alignment/left or right turning).

---



109 Hinges for industrial and ornamental gates




130 Hinges for small gates



# i Weatherproof

Materials and surface treatments fit for a long, care-free outdoor use, is a basic requirement for our products. Therefore, Locinox only uses stainless steel and non-ferro metals as raw material. For the surface treatment we choose for hot-dip galvanization or chroming, if possible. Our aluminum lock box are profoundly tested against wear by salt and never fail thanks to the applied multilayer, high performing coatings.

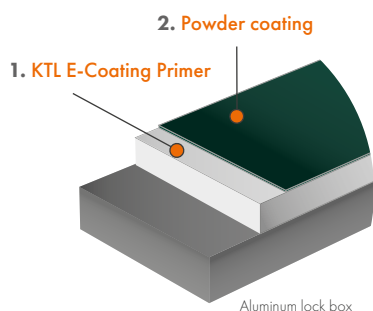

**E-COATED ALUMINUM**



**POWDER COATING**



**HOT-DIP GALVANIZATION**

# i Safety


Even though our products meet most important safety standards, a wrongful assembly could result in hazardous situations. Therefore we like to inform you about the parameters to mind during assembly.

## CORRECT INFORMATION

A team of engineers and experienced product experts are ready to assist you. Every product is supplied with a clear manual which guides you through the steps for a correct and safe installation. For more complex products, a 3D installation video is available on our website.

## MAXIMUM GATE WEIGHT

We always mention the maximum gate weight which is allowed for our hinges. This weight is still under the maximum load. Locinox applies a safety factor 5 which means that they can bear up to 5 times the maximally allowed gate weight without endangering safety. The maximum gate weight and the safety factor are only applicable for gates that comply with the following formula.

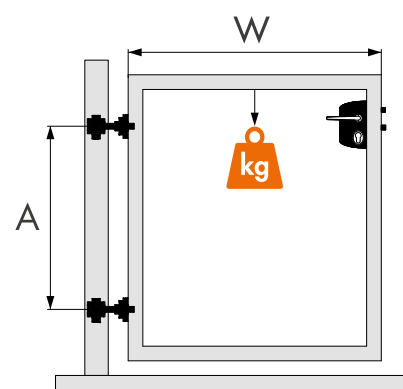

**SAFETY FACTOR 5**

$$\frac{W}{A} \leq 2$$

A = Distance between the hinges  
W = Gate width



**24h  
SHIPPING**

## 180° Bolt-on 4D adjustable hinge

BOLTON4D- (Patent pending)

180° hinge that can quickly be mounted without any welding being required. It also offers all advantages of the GBMU4D range: vandal-proof, adjustment of height, depth and distance between gate and post; and left/right interchangeable so it can be used for both left and right handed gates. BOLTON4D is available in M12 and M16, and always in 2 versions: one with Quick-Fix on both sides and one with Quick-Fix on the post, and on gate side a bolt through fixing for gate frames from 1.6" to 2.4".

### Color options



6005

9005

7016

### Specifications

- ✓ Vandal-proof eyebolt & crossbolt
- ✓ Bolton-U and Bolton-G in extruded aluminum
- ✓ 500h salt spray resistant

### Hinge parts




**BOLTON-U-**  
P. 110



**BOLTON-G-**  
P. 110



**1034HDGA-**  
P. 114

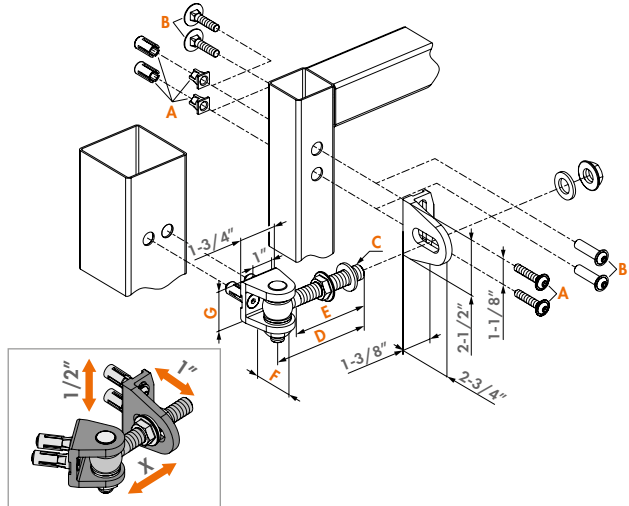

### Order codes & Dimensions



	A	B	C	D	E	F	G
<b>BOLTON4D-12-QF-90</b>	Quick-Fix		M12	3-9/16"	2-3/4"	1-5/8"	1-3/8"
<b>BOLTON4D-12-4060-90</b>		Bolt through fixing	M12	3-9/16"	2-3/4"	1-5/8"	1-3/8"
<b>BOLTON4D-16-QF-110</b>	Quick-Fix		M16	4-3/8"	3-3/8"	2"	1-7/8"
<b>BOLTON4D-16-4060-110</b>		Bolt through fixing	M16	4-3/8"	3-3/8"	2"	1-7/8"







## Bolt-on U-shaped earplate with Quick-Fix


BOLTON-U-

Fix easily and firmly the U-shaped earplate to the fix post with 2 Quick-Fix. Compatible with GBMU 16 / GBMU 4D 16 / BOLTON4D-16.

ALUM 6005 9005 7016

### Specifications

- ✓ U-shaped earplate in aluminum
- ✓ Perfect combination with BOLTON-G-16-QF
- ✓ No welding required: drill holes and fix with Quick-Fix



### Order code

BOLTON-U-16-QF

U-shaped earplate with Quick-Fix



## Bolt-on GRIP with Quick-Fix or internal threaded bushing fastening

BOLTON-G- (Patent pending)


The GRIP can quickly and easily be firmly attached to the fixed post with 2 Quick-Fix attachments elements or with or internal threaded bushing fastening. Compatible with GBMU 16 / GBMU 4D 16 / BOLTON4D 16.

### Color options

ALUM 6005 7016 9005

### Specifications

- ✓ GRIP in aluminum
- ✓ No welding required: drill holes and fix with Quick-Fix
- ✓ The 40-60 version can be applied to tubes of 1-1/5" to 2-1/2"

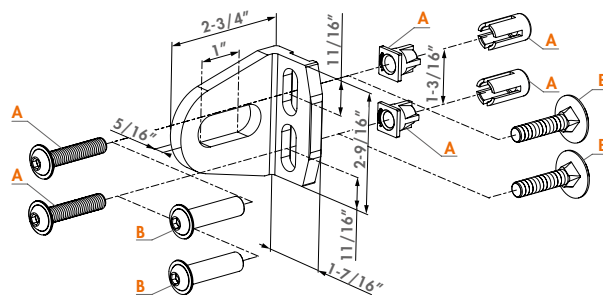

### Order codes

BOLTON-G-16-QF

BOLTON-G-16-4060

A B  
Quick-Fix  
Bolt through fixing



# Gate wing standardization

With Locinox you can easily **standardize and stock only one type of gate wing** which can be used on **left- or right turning gates** or on **double wing gates**. The extensive standardization of our products allows you to use the same wing for the lock and the keep. A counterbox ensures a **uniform and aesthetic look**. The orientation of the GRIP of our GBMU4D hinge makes it possible to determine during installation whether the wing will be used for left or right turning.



100% modular



Time-saving



Left/right reversible



Easy to stack



1 gate profile,  
lots of possibilities



Only 1 drill pattern

## Advantages of wing standardization:

### Easy to stack and transport

A gate wing where the hardware such as hinges and locks can be installed afterwards. Easier to stack, keep on stock and easier to transport!



### Hinge, lock and keep reversibility

A gate wing can be used for left- or right turning. Locinox locks and keeps are reversible and the hinges can be installed in both directions.



## Right turning gate:



## Left turning gate:



## Double wing gate:





## 180° weld-on 4D adjustable hinge

GBMU4D12 (Patented)

4-way adjustable, hot-dip galvanized 180° hinge. Depth and spacing between gate and post are adjustable after installation. No more left or right swinging gates in stock. Only one gate wing should be produced for both left and right turning gates. The welding parts are available in black steel or zinc plated.

### Specifications

- ✓ 180° opening and closing angle
- ✓ Hot-dip galvanized eyebolt and Grip
- ✓ 500h salt spray resistant

### Hinge parts



1001U  
P. 116




KLAUW12  
P. 116



GRIP12  
P. 118



4DFIX-I-12  
P. 117

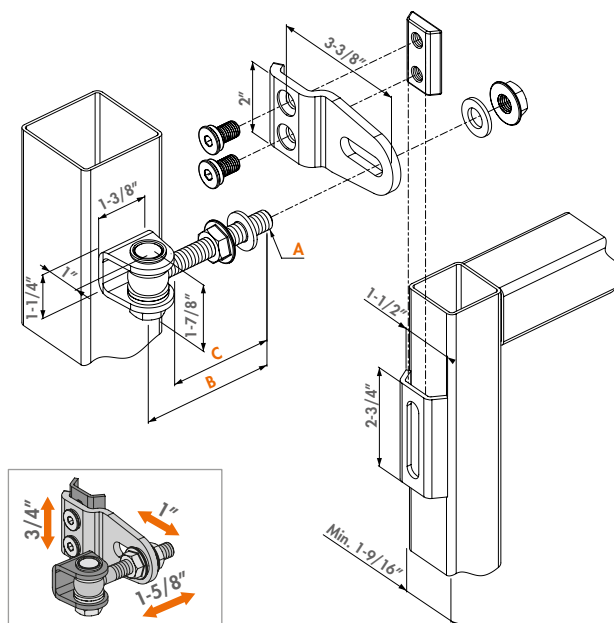

### Order codes & Dimensions

Welding parts in black steel (B)

**GBMU4D12-B-90**

Welding parts zinc plated (Z)

**GBMU4D12-Z-90**

220 lbs

**A** **B** **C**  
Eyebolt M12 Length 3-9/16" 2-3/4"



## 180° weld-on 4D adjustable hinge

GBMU4D16 (Patented)

4-way adjustable, hot-dip galvanized 180° hinge. Depth and spacing between gate and post are adjustable after installation. Only one gate wing should be produced for both left and right turning gates. The welding parts are available in black steel or zinc plated.

### Grip color options

6005

6009

9005

9010

ALUM

7016

**24h  
SHIPPING**

### Specifications

- ✓ 180° opening and closing angle
- ✓ Hot-dip galvanized eyebolt and Grip
- ✓ 500h salt spray resistant

### Hinge parts



1001U  
P. 116




KLAUW-  
P. 117



GRIP16  
P. 118



4DFIX-I  
P. 117

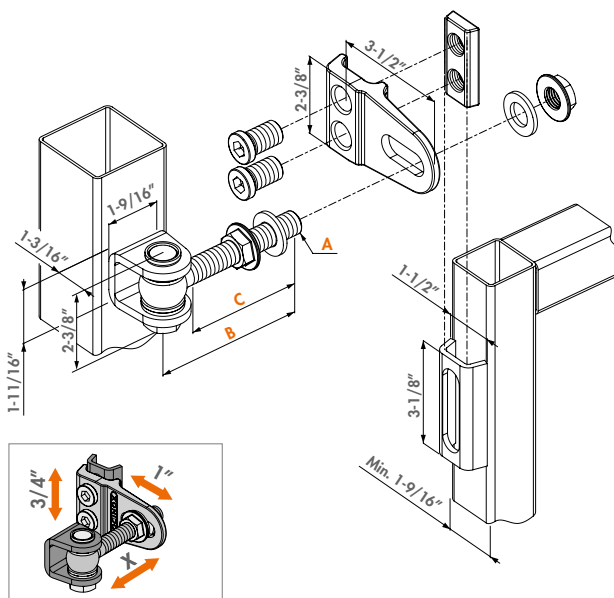

### Order codes & Dimensions

Welding parts in black steel (B)

**GBMU4D16-B-110** **24h  
SHIPPING**

**GBMU4D16-B-150**

Welding parts zinc plated (Z)

**GBMU4D16-Z-110**

**GBMU4D16-Z-150**

440 lbs

**A** **B** **C**  
Eyebolt M16 Length 4-3/8" 3-3/8"  
Eyebolt M16 Length 5-7/8" 4-15/16"





## 4-way adjustable 180° hinge

GBMU4D20 (Patented)

4-way adjustable, hot-dip galvanized 180° hinge. Depth and spacing between gate and post are adjustable after installation. No more left or right swinging gates in stock. Only one gate wing should be produced for both left and right turning gates. The welding parts are available in black steel or zinc plated.

**24h**  
SHIPPING

### Grip color options

6005

6009

9005

9010

ALUM  
24h  
SHIPPING

7016

### Specifications

- ✓ 180° opening and closing angle
- ✓ Hot-dip galvanized eyebolt and Grip
- ✓ 500h salt spray resistant

### Hinge parts



1001U-B-20  
P. 116




KLAUW-  
P. 117



GRIP20  
P. 118



4DFIX-I  
P. 117

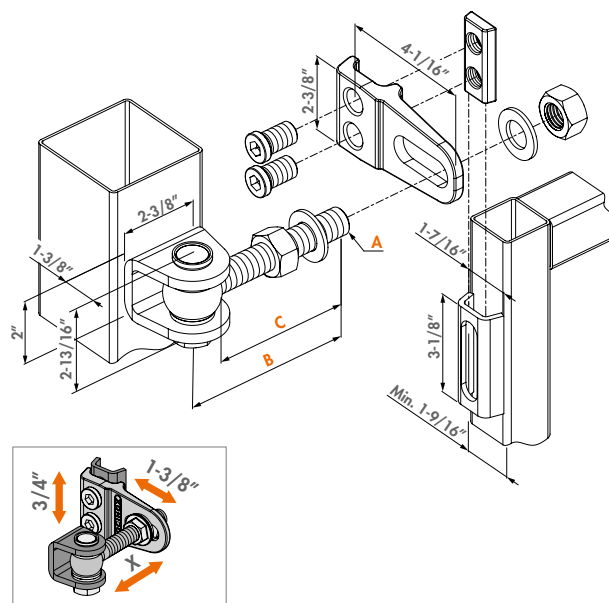

### Order codes & Dimensions

Welding parts in black steel (B)

Welding parts zinc plated (Z)



GBMU4D20-B-130

24h  
SHIPPING

GBMU4D20-Z-130

880 lbs

GBMU4D20-B-150

GBMU4D20-Z-150

880 lbs

A	B	C
Eyebolt M20	Length 5-1/8"	4-1/8"
Eyebolt M20	Length 5-7/8"	4-1/2"



## 4-way adjustable vandal-proof 180° hinge

GBMU4DSHIELD (Patented)

Vandal-proof hot dip galvanized 180° hinge. This secured version of the GBMU4D16 hinge provides extra security since the eyebolt or cross bolt can not be tampered with. With the 4-way adjustability you no longer have to keep left or right turning gates in stock. Height, depth, left and right alignment and turning direction are individually adjustable.

### Specifications

- ✓ 180° opening and closing angle
- ✓ Hot-dip galvanized eyebolt and Grip
- ✓ Vandal-proof Grip-shield included
- ✓ 500h salt spray resistant

### Compatible hinge parts



1001U  
P. 116




KLAUW-  
P. 117



GRIP16  
P. 118



4DFIX-I  
P. 117

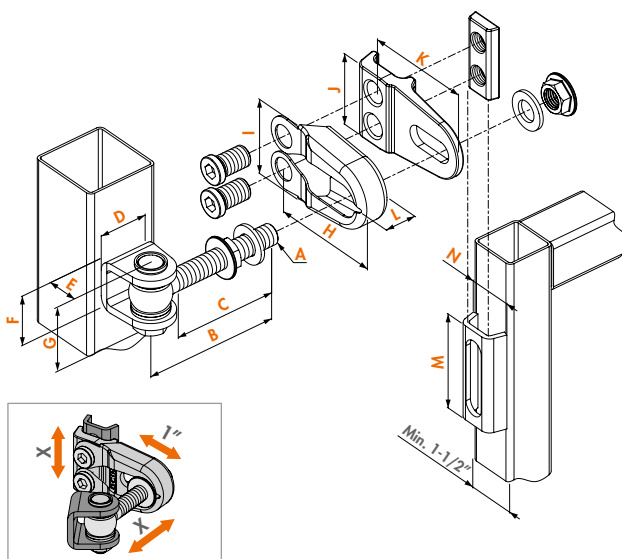

### Order codes & Dimensions

Welding parts in black steel (B)

Welding parts zinc plated (Z)



GBMU4DSHIELD-12-B-90

GBMU4DSHIELD-12-Z-90

220 lbs

GBMU4DSHIELD-16-B-110

GBMU4DSHIELD-16-Z-110

440 lbs

A	B	C	D	E	F	G	H	I	J	K	L	M	N
M12	3-9/16"	2-3/4"	1-3/8"	15/16"	1-1/4"	1-7/8"	3-7/16"	2-3/16"	2"	3-3/8"	15/16"	2-3/4"	1-1/2"
M16	4-5/16"	3-3/8"	1-9/16"	1-3/16"	1-5/8"	2-3/8"	3-9/16"	2-1/2"	2-3/8"	3-7/16"	1"	3-1/8"	1-7/16"




## 180° 3-way adjustable hinge

GBMU (Patented)

3-way adjustable hot-dip galvanized 180° hinge. Depth and spacing between gate and post are adjustable after installation. The welding parts are available in black steel or zinc plated.

### Specifications

- ✓ Vandal-proof eyebolt & crossbolt
- ✓ 500h salt spray resistant

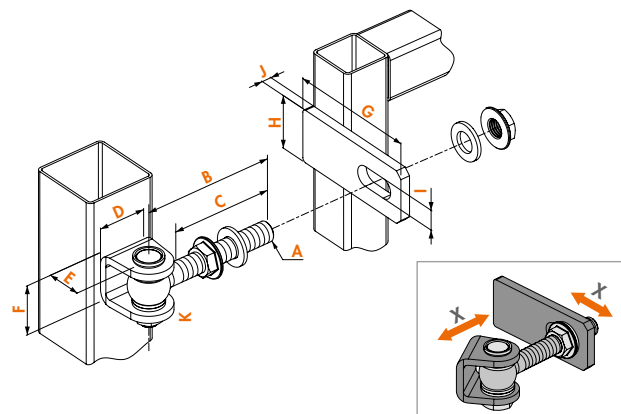

### Order codes

Welding parts in black steel (B)	Welding parts zinc plated (Z)	lbs	A	B	C	D	E	F	G	H	I	J	K
GBMU-B-M12-90	GBMU-Z-M12-90	220 lbs	M12	3-1/2"	2-3/4"	1-3/8"	1"	1-1/4"	3-1/2"	1-3/8"	1/2"	1/4"	1-7/8"
GBMU-B-M16-110	GBMU-Z-M16-110	440 lbs	M16	4-3/8"	3-3/8"	1-5/8"	1-1/8"	1-5/8"	4-3/8"	1-3/4"	5/8"	5/16"	2-3/8"
GBMU-B-M16-150	GBMU-Z-M16-150	440 lbs	M16	5-7/8"	4-7/8"	1-5/8"	1-1/8"	1-5/8"	4-3/8"	1-3/4"	5/8"	5/16"	2-3/8"
GBMU-B-M18-105	GBMU-Z-M18-105	550 lbs	M18	4-1/8"	3-1/8"	2"	1-1/8"	1-5/8"	4-3/4"	2"	3/4"	5/16"	2-1/2"
GBMU-B-M18-150	GBMU-Z-M18-150	550 lbs	M18	5-7/8"	4-7/8"	2"	1-1/8"	1-5/8"	4-3/4"	2"	3/4"	5/16"	2-1/2"
GBMU-B-M20-130	GBMU-Z-M20-130	880 lbs	M20	5-1/8"	4-1/8"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	13/16"	1/2"	2-13/16"
GBMU-B-M20-150	GBMU-Z-M20-150	880 lbs	M20	5-7/8"	4-1/2"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	13/16"	1/2"	2-13/16"
GBMU-B-M22-145	GBMU-Z-M22-145	970 lbs	M22	5-3/4"	4-1/2"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	15/16"	1/2"	2-7/8"
GBMU-B-M22-160	GBMU-Z-M22-160	970 lbs	M22	6-1/4"	5-1/8"	2-3/8"	1-3/8"	2"	5-1/8"	2-3/8"	15/16"	1/2"	2-7/8"




## Hot-dip galvanized eyebolt set

1034HDGA- (Patented)

Eyebolt set hot dip galvanized. Vandal-proof.

### Specifications

- ✓ Hot-dip galvanized bearing eyebolt, transverse bolt and screws
- ✓ Stainless steel ring (6 x DIN125A)
- ✓ Vandal-proof
- ✓ 500h salt spray resistant

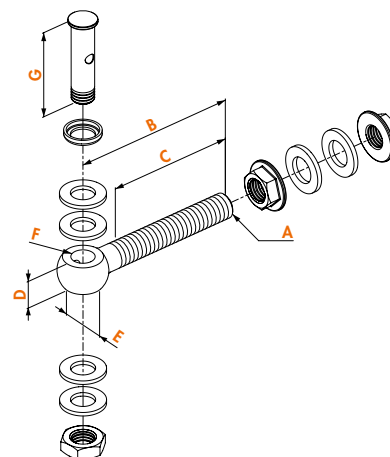

### Order codes

	A	B	C	D	E	F	G
1034HDGA-M12-90	M12	Length 3-9/16"	2-3/4"	9/16"	15/16"	Ø1/2"	1-7/8"
1034HDGA-M16-110	M16	Length 4-5/16"	3-3/8"	3/4"	1-1/4"	Ø9/16"	2-3/8"
1034HDGA-M16-150	M16	Length 5-15/16"	4-15/16"	3/4"	1-1/4"	Ø9/16"	2-3/8"
1034HDGA-M18-105	M18	Length 4-1/8"	3-1/8"	13/16"	1-7/16"	Ø5/8"	2-7/16"
1034HDGA-M18-150	M18	Length 5-15/16"	4-15/16"	13/16"	1-7/16"	Ø5/8"	2-7/16"
1034HDGA-M20-130	M20	Length 5-1/8"	4-1/8"	7/8"	1-9/16"	Ø3/4"	2-13/16"
1034HDGA-M20-150	M20	Length 5-15/16"	4-1/2"	7/8"	1-9/16"	Ø3/4"	2-13/16"
1034HDGA-M22-145	M22	Length 5-11/16"	4-1/2"	15/16"	1-5/8"	Ø13/16"	2-15/16"
1034HDGA-M22-160	M22	Length 6-5/16"	5-1/8"	15/16"	1-5/8"	Ø13/16"	2-15/16"




## Corrosion-resistant and vandal-proof eyebolt set

1034A2-

Corrosion-resistant and vandal-proof eyebolt set in stainless steel.

### Specifications

- ✓ M16 Eyebolt set in stainless steel, including: eyebolt, cross bolt, nuts and washers
- ✓ Vandal-proof
- ✓ 500h salt spray resistant

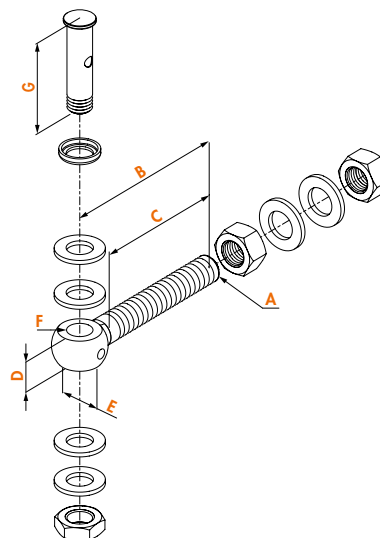

### Order code

1034A2-M16-110-50

A	B	C	D	E	F	G
M16	Length 4-5/16"	3-3/8"	3/4"	1-1/4"	Ø9/16"	2-3/8"




## Hot-dip galvanized bearing eyebolt for 3D and 4D hinges

1034ROLL-HDG-

The bearing eyebolt can be integrated in any Locinox GBMU M16 and M20 hinge. The eyebolt ensures a smooth opening and closing and is perfect in combination with Locinox gate closers. It has a stainless steel anti-theft crossbolt.

### Specifications

- ✓ Use with Locinox gate closers recommended
- ✓ Hot-dip galvanized bearing eyebolt, transverse bolt and screws
- ✓ Stainless steel ring (6 x DIN125A)
- ✓ Dual sealed stainless steel bearings
- ✓ Vandal-proof
- ✓ 500h salt spray resistant

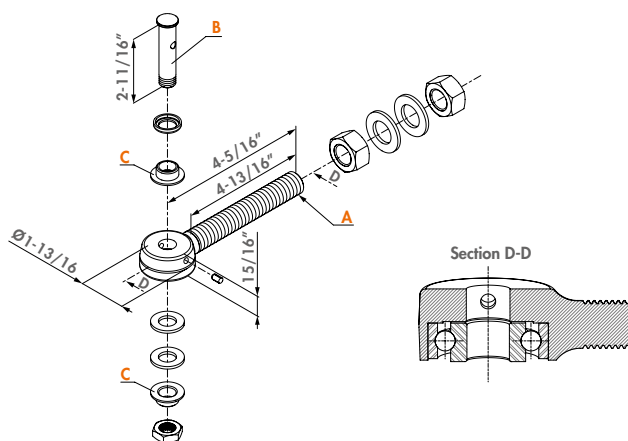

### Order codes

1034ROLL-HDG-M16

1034ROLL-HDG-M20

A	B	C
Eyebolt M16	Crossbolt Ø9/16"	
Eyebolt M20	Crossbolt Ø9/16"	Ø5/8" => Ø9/16"






## U-shaped ear plate in black steel

1001U

U-shaped ear plate in black steel for 180° hinges

### Specifications

- ✓ U-shaped ear plate to weld on in black steel or zinc plated



### Order codes

Black steel (B)	Zinc plated (Z)	A	B	C	D	E
1001U-B-12	1001U-Z-12	1-3/8"	1-1/4"	15/16"	Ø1/2"	3/16"
1001U-B-16	1001U-Z-16	1-9/16"	1-5/8"	1-3/16"	Ø9/16"	1/4"
1001U-B-18	1001U-Z-18	1-9/16"	1-5/8"	1-3/16"	Ø11/16"	1/4"
1001U-B-20	1001U-Z-20	2-3/8"	2"	1-3/8"	Ø3/4"	5/16"
1001U-B-22	1001U-Z-22	2-3/8"	2"	1-3/8"	Ø13/16"	5/16"




## Groove plate in black steel

1002M

Groove plate in black steel for 180° hinges

### Specifications

- ✓ Black steel or zinc plated groove plate to weld on

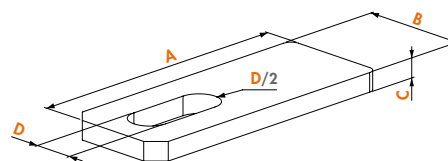

### Order codes

Black steel (B)	Zinc plated (Z)	A	B	C	D
1002M-B-12	1002M-Z-12	3-9/16"	1-3/8"	1/4"	1/2"
1002M-B-16	1002M-Z-16	4-5/16"	1-3/4"	5/16"	11/16"
1002M-B-18	1002M-Z-18	4-3/4"	2"	5/16"	3/4"
1002M-B-20	1002M-Z-20	5-1/8"	2-3/8"	1/2"	13/16"
1002M-B-22	1002M-Z-22	5-1/8"	2-3/8"	1/2"	15/16"




## Gate claw (Special Order Only)

KLAUW12

Black steel or zinc plated gate claw to weld on. Compatible with GBMU4DSHIELD-12.

### Specifications

- ✓ Gate claw in black steel



### Order codes

Black steel (B)	Zinc plated (Z)	
KLAUW12-B	KLAUW12-Z	Compatible with GRIP12 & 4DFIX-I-13




## Gate Claw

KLAUW-

Black steel or zinc plated welding part for a precise, strong and aesthetic connection to (min.) 1-9/16" profiles. Compatible with GBMU4D16, GBMU4D20 and Bearing Hinge.

### Specifications

- ✓ Gate claw in black steel or zinc plated



### Order codes

Black steel (B)

Zinc plated (Z)

**KLAUW-B**

**KLAUW-Z**

Compatible with GRIP16, GRIP20 & 4DFIX-I




## Claw nut and bolts for 4D hinges

4DFIX-I-12

Hot-dip galvanized claw nut with stainless steel M10 bolts. Part of the GBMU4D12 hinge.

### Specifications

- ✓ Claw nut hot-dip galvanized
- ✓ 2 stainless steel bolts M10 x 13/16"
- ✓ Component of the GBMU4DSHIELD 12 hinge

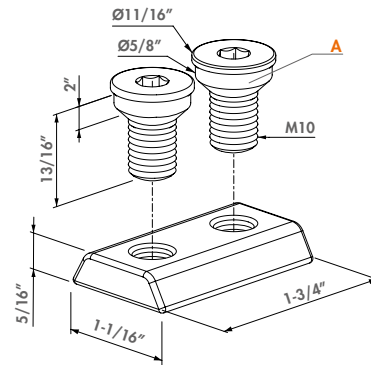

### Order code

**4DFIX-I-12**

**A**

Bolts: M10x13/16" (2x)




## Claw nut and bolts for 4D hinges (Special Order Only)

4DFIX-I

Hot-dip galvanized claw nut with stainless steel M16 bolts. Part of the GBMU4D16 and 20 hinge.

### Specifications

- ✓ Claw nut hot-dip galvanized
- ✓ 2 bolts M16 x 1-1/4" in stainless steel
- ✓ Applicable for 4D16 and 4D20 hinges

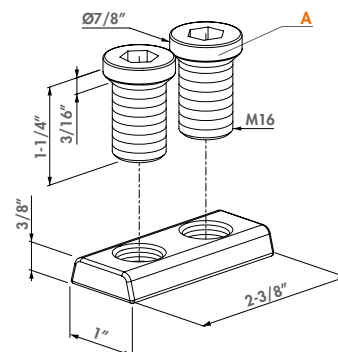

### Order code

**4DFIX-I**

**A**

Bolts: M16 x 1-1/4" (2x)



## Fixation grip for hinge GBMU4D12

GRIP12


Fixation grip for hinge GBMU4D12

### Color options

ALUM

### Specifications

- ✓ Hot-dip galvanized steel

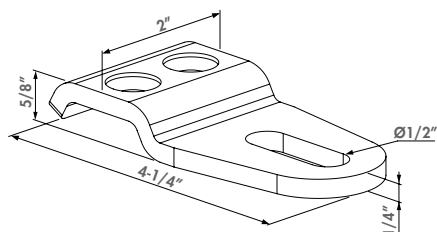

### Order code

GRIP12

Compatible eyebolt set: 1034HDGA-M12-90



## Fixation Grip for hinge GBMU4D16 (Special Order Only)

GRIP16


Fixation Grip for hinge GBMU4D16 (Special Order Only)

### Color options

6005 6009 9005 9010 7016 ALUM

### Specifications

- ✓ Hot-dip galvanized steel
- ✓ Available in different colors

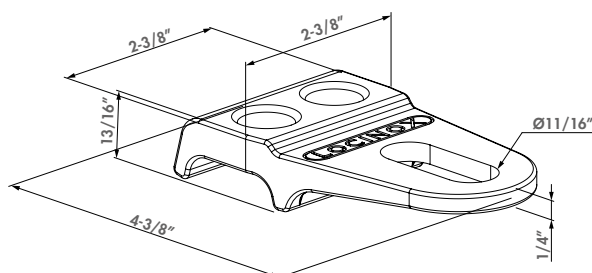

### Order code

GRIP16

Compatible eyebolt set: 1034HDGA-M16 or 1034ROLL-M16



## Fixation Grip for hinge GBMU4D20 (Special Order Only)

GRIP20


Fixation Grip for hinge GBMU4D20 (Special Order Only)

### Color options

6005 6009 9005 9010 7016 ALUM

### Specifications

- ✓ Hot-dip galvanized steel
- ✓ Available in different colors

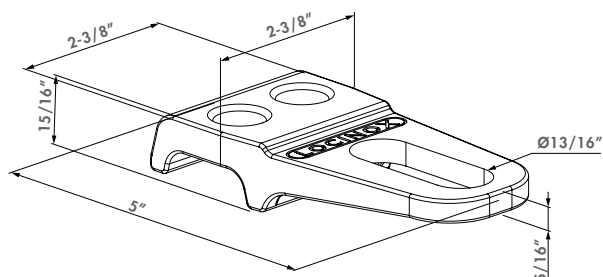

### Order code

GRIP20

Compatible eyebolt set: 1034HDGA-M20



## 90° adjustable hinge

G90Z (Patented)

Hot-dip galvanized 90° hinge. The perfect solution for all your small industrial gates.



### Specifications

- ✓ 90° opening
- ✓ Nut in black steel for welding
- ✓ Earplate in black steel or cold zinc plated
- ✓ Vandal-proof
- ✓ 500h salt spray resistant

### Hinge parts




1036  
P. 121



1039SET  
P. 121



1127  
P. 121

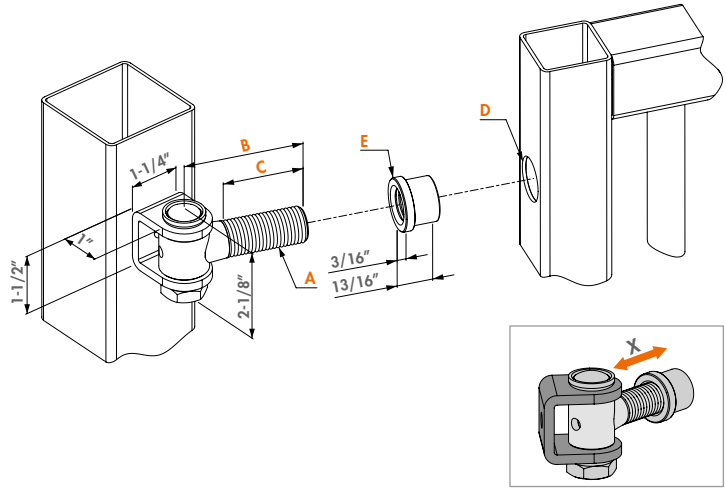

### Order codes

Welding parts in black steel (B)	Welding parts zinc plated (Z)	lbs	A	B	C	D	E
<b>G90Z-B-M16-65</b>	<b>G90Z-Z-M16-65</b>	330 lbs	M16	2-1/2"	1-7/8"	Ø7/8"	Ø1"
<b>G90Z-B-M16-110</b>	<b>G90Z-Z-M16-110</b>	330 lbs	M16	3-5/16"	3-5/8"	Ø7/8"	Ø1"
<b>G90Z-B-M16-150</b>	<b>G90Z-Z-M16-150</b>	330 lbs	M16	5-7/8"	5-2/8"	Ø7/8"	Ø1"
<b>G90Z-B-M20-67</b>	<b>G90Z-Z-M20-67</b>	660 lbs	M20	2-5/8"	1-3/4"	Ø1"	Ø1-1/8"
<b>G90Z-B-M20-150</b>	<b>G90Z-Z-M20-150</b>	660 lbs	M20	5-7/8"	5"	Ø1"	Ø1-1/8"

## Vandal-proof one way 90° hinge with adjustable welding nut

G90LR (Patented)

Vandal-proof hot-dip galvanized 90° hinge. This hinge is the perfect solution for all your small industrial gates. The eyebolt can not be tampered with when the gate is closed. With the LR welding nut you can easily adjust the hinge.



### Specifications

- ✓ 90° opening
- ✓ Adjustable nut zinc plated
- ✓ Zinc-plated earplate
- ✓ Vandal-proof
- ✓ 500h salt spray resistant

### Hinge parts




1036-Z  
P. 121



1039SET  
P. 121



LR  
P. 123

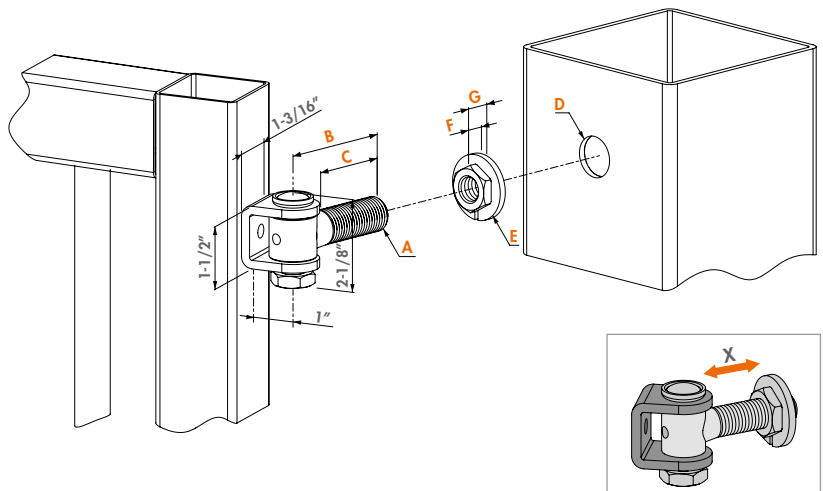

### Order codes

Welding parts zinc plated (Z)	lbs	A	B	C	D	E	F	G
<b>G90LR-Z-M16-65</b>	330 lbs	M16	Length 2-9/16"	1-7/8"	Ø1"	Ø1-1/2"	3/8"	9/16"
<b>G90LR-Z-M16-110</b>	330 lbs	M16	Length 4-5/16"	3-5/8"	Ø1"	Ø1-1/2"	3/8"	9/16"
<b>G90LR-Z-M16-150</b>	330 lbs	M16	Length 5-15/16"	5-3/16"	Ø1"	Ø1-1/2"	3/8"	9/16"
<b>G90LR-Z-M20-67</b>	660 lbs	M20	Length 2-5/8"	1-3/4"	Ø1-1/4"	Ø1-13/16"	7/16"	11/16"
<b>G90LR-Z-M20-150</b>	660 lbs	M20	Length 5-15/16"	5-1/16"	Ø1-1/4"	Ø1-13/16"	7/16"	11/16"



## Vandal-proof one way 90° hinge with adjustable steel wall plate

G90WP (Patented)

Vandal-proof hot-dip galvanized 90° hinge. This secured hinge is the perfect solution for all your small and medium-sized gates. The eyebolt can not be tampered with when the gate is closed. Thanks to the wall plate with adjustable nut you can easily adjust the hinge.

### Specifications

- ✓ 90° opening
- ✓ Wall plate with adjustable nut
- ✓ Black steel ear plate for welding
- ✓ Vandal-proof
- ✓ 500h salt spray resistant

### Hinge parts




1036-B  
P. 121



1039SET  
P. 121



1005WP  
P. 124

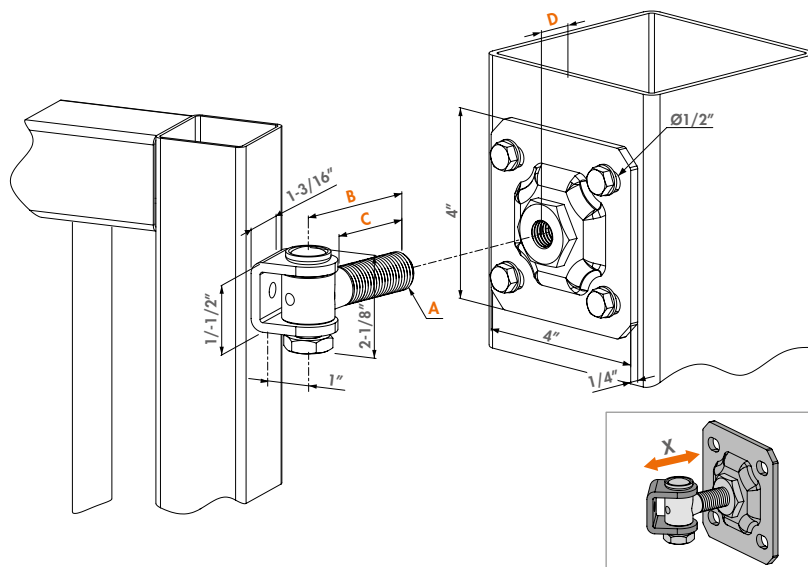

### Order codes

Welding parts in black steel (B)

		A	B	C	D
<b>G90WP-B-M16-65</b>	330 lbs	M16	Length 2-9/16"	1-7/8"	3/4"
<b>G90WP-B-M16-110</b>	330 lbs	M16	Length 4-5/16"	3-5/8"	3/4"
<b>G90WP-B-M16-150</b>	330 lbs	M16	Length 5-15/16"	5-3/16"	3/4"
<b>G90WP-B-M20-67</b>	660 lbs	M20	Length 2-5/8"	1-3/4"	13/16"
<b>G90WP-B-M20-150</b>	660 lbs	M20	Length 5-15/16"	5-1/16"	13/16"






## Earplate for eyebolt 1039SET (Special Order Only)

1036

Earplate for hinge 1039SET

### Specifications

- ✓ U-shaped ear plate to weld on in black steel or zinc plated
- ✓ Compatible with hinge 1039SET-M16 and M20



### Order codes

Black steel (B)

Zinc plated (Z)

A

1036-B

1036-Z

For crossbolt Ø9/16"

## Weld nut (Special Order Only)


1127

M16 or M20 weld nut



### Specifications

- ✓ Compatible with hinge 1039SET
- ✓ Black steel for welding



### Order codes

For eyebolt

1127-M16

1127-M20

A	B	C	D
Ø1"	Ø13/16"	3/16"	13/16"
Ø1-3/16"	Ø1"	3/16"	13/16"

## Eyebolt set for earplate 1036


1039SET (Patented)

Eyebolt set for earplate 1036



### Specifications

- ✓ Eyebolt and hot-dip galvanized bolt
- ✓ 500h salt spray resistant



### Order codes

Hot-dip galvanized eyebolt set

1039SET-M16-65

1039SET-M16-110

1039SET-M16-150

1039SET-M20-67

1039SET-M20-150

A	B	C	D
M16	Length 2-9/16"	1-7/8"	15/16"
M16	Length 4-5/16"	3-5/8"	15/16"
M16	Length 5-15/16"	5-3/16"	15/16"
M20	Length 2-5/8"	1-3/4"	1-1/16"
M20	Length 5-15/16"	5-1/16"	1-1/16"





## Ornamental hinge set

G-ORNA-LR

Hot-dip galvanized hinge set including grease fitting and adjustable nut for ornamental gates.

### Specifications

- ✓ Ornamental hinge set
- ✓ Black steel or zinc plated welding base
- ✓ Zinc plated adjustable nut
- ✓ Hot-dip galvanized clamp hinge with stainless steel bolt

### Hinge parts





1002B  
P. 123



1004ORNA  
P. 123



LR  
P. 123

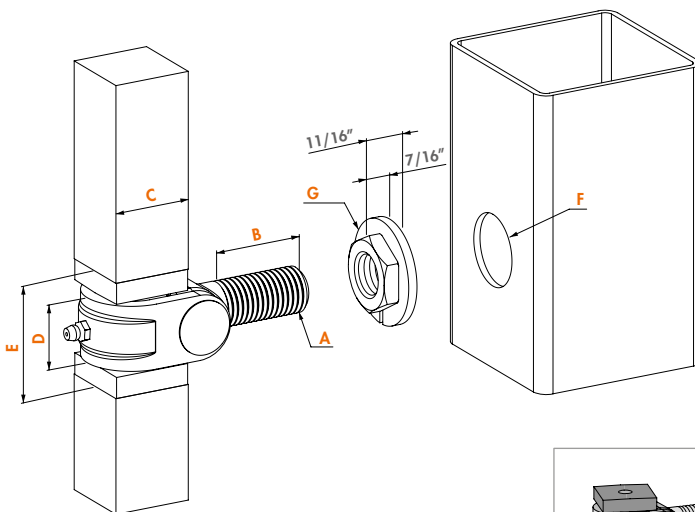

### Order codes

Welding block in black steel (B)	Welding block zinc plated (Z)		A	B	C	D	E	F	G
<b>G-ORNA-LR-B-M20</b>	<b>G-ORNA-LR-Z-M20</b>	660 lbs	M20	Length 1-9/16"	Welding base 1-3/8"	1-1/8"	2-1/16"	Ø1-1/4"	Ø1-13/16"
<b>G-ORNA-LR-B-M24</b>	<b>G-ORNA-LR-Z-M24</b>	880 lbs	M24	Length 1-3/4"	Welding base 1-9/16"	1-5/16"	2-1/4"	Ø1-3/8"	Ø2"
<b>G-ORNA-LR-B-M27</b>	<b>G-ORNA-LR-Z-M27</b>	1100 lbs	M27	Length 2-3/8"	Welding base 2"	1-9/16"	2-7/16"	Ø1-1/2"	Ø2-1/16"

## Ornamental hinge set with wall plate

G-ORNA-WP

Hot-dip galvanized hinge set including greaser and wall plate with adjustable nut for ornamental gates.



### Specifications

- ✓ Ornamental hinge set
- ✓ Black steel or zinc plated welding base
- ✓ Hot-dip galvanized wall plate
- ✓ Hot-dip galvanized clamp hinge with stainless steel bolt
- ✓ Welding base 1-3/8" x 1-3/8", M20 clamp hinge

### Hinge parts





1002B  
P. 123



1004ORNA  
P. 123



1005WP-M20  
P. 124

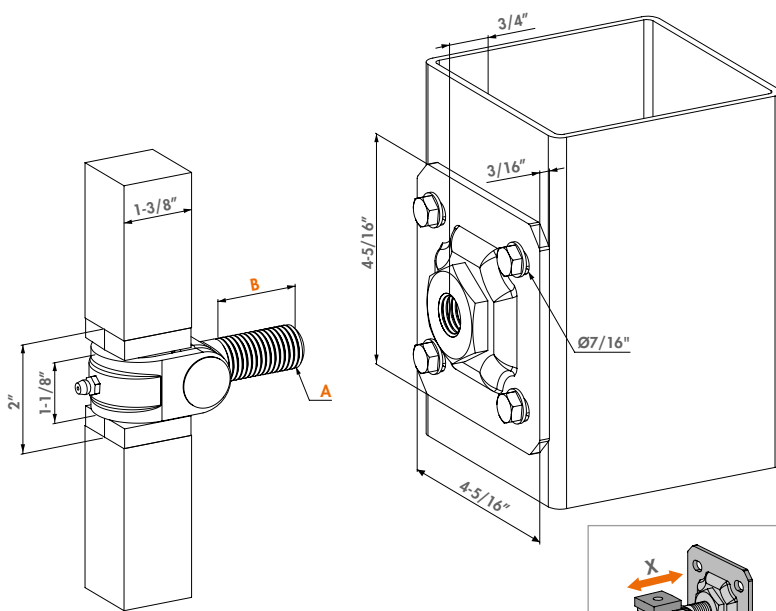

### Order codes

Welding block in black steel (B)	Welding block zinc plated (Z)		A	B
<b>G-ORNA-WP-B-M20</b>	<b>G-ORNA-WP-Z-M20</b>	660 lbs	M20	Length 1-9/16"




## Clamp hinge

1004ORNA

Hot-dip galvanized clamp hinge.

### Specifications

- ✓ Hot-dip galvanized clamp hinge with stainless steel bolt

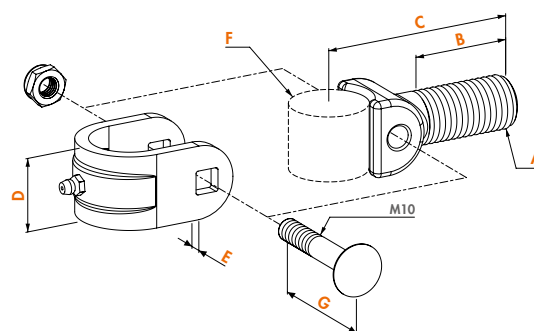

### Order codes

1004ORNA-M20

1004ORNA-M24

1004ORNA-M27

	A	B	C	D	E	F	G
M20	Length 1-9/16"	3-3/16"	1-1/8"	1/4"	Ø1-3/16"	2-3/16"	
M24	Length 1-3/4"	3-1/2"	1-5/16"	1/4"	Ø1-3/8"	2-3/8"	
M27	Length 2-9/16"	4-3/16"	1-9/16"	1/4"	Ø1-9/16"	2-9/16"	




## Welding block for ornamental hinge

1002B

Black steel or zinc plated welding bloc for ornamental clamp hinges.

### Specifications

- ✓ Black steel or zinc plated welding base



### Order codes

Black steel (B)

Zinc plated (Z)

1002B-B-35

1002B-Z-35

1002B-B-40

1002B-Z-40

1002B-B-50

1002B-Z-50

A	B	C	D
2-1/16"	1-1/4"	1-3/8"	Ø1-3/16"
2-1/4"	1-7/16"	1-9/16"	Ø1-3/8"
2-7/16"	1-5/8"	2"	Ø1-9/16"

## Adjustable nut (Special Order Only)


LR

Zinc-plated adjustable welding nut for ornamental gates. With this system you can finetune your ornamental gate.



### Specifications

- ✓ Adjustable welding nut, zinc-plated



### Order codes

LR-M16

LR-M20

LR-M24

LR-M27

A	B	C
Ø1-1/2"	5/8"	7/16"
Ø1-13/16"	11/16"	7/16"
Ø2"	11/16"	7/16"
Ø2-1/16"	11/16"	7/16"

## Wall plate hot-dip galvanized


1005WP

Hot-dip galvanized wall plate with adjustable nut for garden gate hinges.



### Specifications

- ✓ Steel wallplate hot-dip galvanized



### Order codes

	A	B	C	D	E	F
1005WP-M12	M12	2-3/8"	9/16"	1/8"	3/16"	Ø1/4"
1005WP-M16	M16	3-15/16"	3/4"	3/16"	3/16"	Ø7/16"
1005WP-M20	M20	3-15/16"	13/16"	3/16"	3/16"	Ø7/16"

## Flower wall plate hot-dip galvanized (Special Order Only)


1005WPF

Hot-dip galvanized wall plate with adjustable nut for ornamental gates.



### Specifications

- ✓ Flower wall plate for ornamental gates



### Order codes

	A	B	C	D	E	F
1005WPF-M20	M20	4-5/16"	3/4"	2-3/8"	3/16"	Ø7/16"
1005WPF-M22	M22	4-3/4"	13/16"	2-9/16"	3/16"	Ø7/16"
1005WPF-M24	M24	5-1/8"	13/16"	2-3/4"	3/16"	Ø7/16"
1005WPF-M27	M27	5-1/8"	13/16"	2-3/4"	3/16"	Ø7/16"

## Hot-dip galvanized steel wall plate


1005WPU16

Hot-dip galvanized wall plate with U-shaped ear for M16 eyebolt with M14 bolt.



### Specifications

- ✓ Steel wallplate hot-dip galvanized
- ✓ For M16 eyebolt and M14 bolt

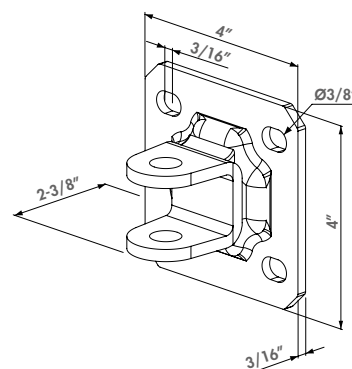

### Order code

1005WPU16

Compatible eyebolt set: 1034HDGA-M16 or 1034ROLL-M16






## Gate pivot

GDP

Black steel or zinc-plated gate pivot point for ornamental gates.

### Specifications

- ✓ Packed per 10 pieces



### Order codes

Black steel (B)	Zinc plated (Z)	A
GDP-B-35	GDP-Z-35	Ø1-1/8"
GDP-B-40	GDP-Z-40	Ø1-5/16"
GDP-B-50	GDP-Z-50	Ø1-3/4"




## Base plate and plate holder for gate pivot frame

GP-U-BASE

The combination of the plate holder and the base plate makes it possible to adjust the distance between the post and the gate. The hot-dip galvanized base plate suits the gate pivot frame GDP-B-35, GDP-B-40, and GDP-B-50 so you only need to keep 1 single product in stock.

### Specifications

- ✓ Zinc-plated plate holder with hot dip galvanized base plate
- ✓ Distance between post and gate 1-3/8" adjustable
- ✓ All kinds of post profiles

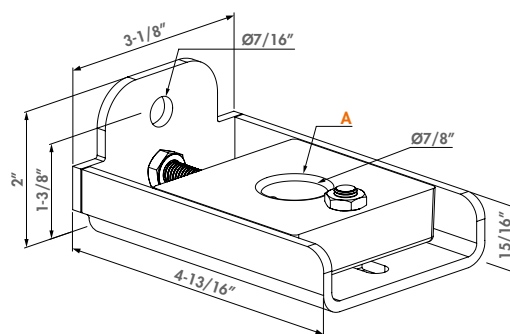

### Order code

GP-U-BASE

A  
Compatible with all gate pivots




**24h  
SHIPPING**

### Color options



### Specifications

- ✓ Aesthetic design & powder coated aluminum housing
- ✓ Mounting Hardware: Anti-theft & vandal-proof
- ✓ Fast and easy fixation with Quick-Fix

### Compatible gate closer



MAMMOTH-180  
P. 15

### Order code



DINO



330 lbs

A

For Quick-Fix Ø9 / 16"

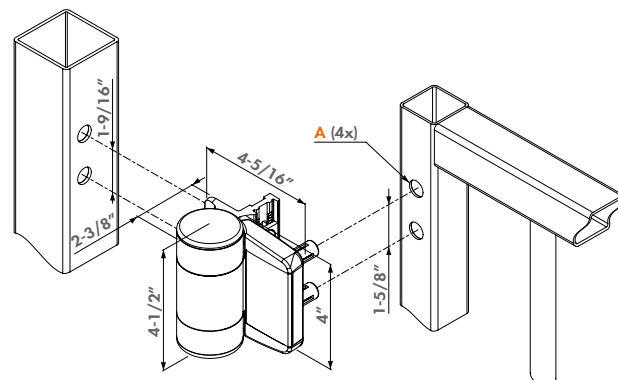

## 90° 2-Way adjustable bearing hinge

### BEARING HINGE

Stainless steel maintenance free bearing hinge for mounting on all your automated gate projects. The hinge is adjustable in height and width.


**24h  
SHIPPING**

### Specifications

- ✓ Specially developed for automated gates
- ✓ Rust resistant housing
- ✓ Maintenance free sealed bearing
- ✓ Can be used as top & bottom hinge

### Hinge part



KLAUW-  
P. 117

### Order code

BEARING HINGE





440 lbs

A


B

Gate frame 1-9/16" x 1-9/16" 2" x 2"

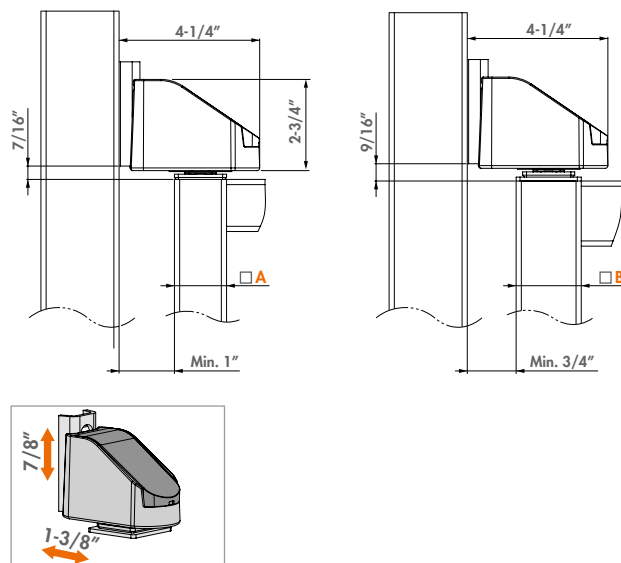


## 1 DBH-

1DBH-A-BB-50







1DBH-Z-BB-50



1DBH-Z-CB-50



- ✔ Specially developed for automated gates
- ✔ Conical bearing version (CB): protected by housing, 1650 lbs axial load capacity
- ✔ 1" adjustable in width
- ✔ Version A-BB: with adjustment screws, recommended as top hinge
- ✔ Version Z-BB: universal, can be used as top or bottom hinge
- ✔ Version Z-CB: hinge with high load capacity, recommended as bottom hinge

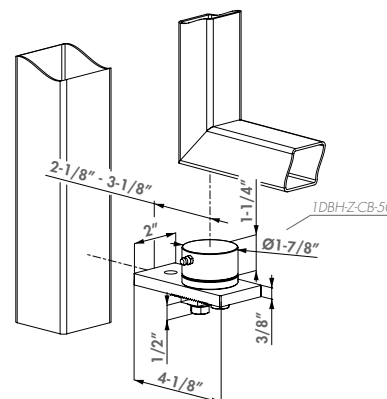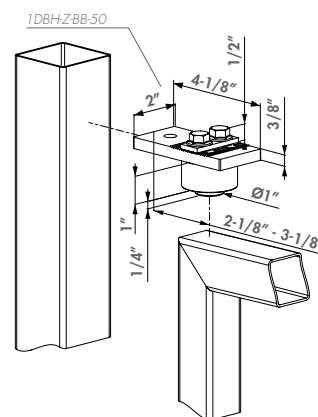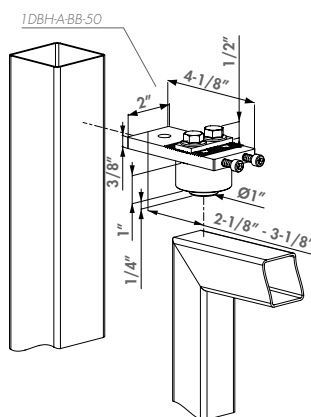

<b>1DBH-A-BB-50</b>	Adjustable 90° hinge with stainless steel ball bearing and adjustment screws
<b>1DBH-Z-BB-50</b>	Adjustable 90° hinge with stainless steel ball bearing
<b>1DBH-Z-CB-50</b>	Adjustable 90° hinge with conical bearing

440 lbs

440 lbs

1650 lbs





**24h**  
**SHIPPING**

## 3DM (Patented)

Stainless steel hinge for aluminum and steel gates equipped with the fast Quick-Fix mounting hardware. The hinge is adjustable in three dimensions; height, left/right alignment and swing direction. Also available with hot-dip galvanized arm. This hinge is made to fit a 4" square post and a 1-1/2" to 2" gate frame.

- ✔ 180° hinge for metal & aluminum gates with 4" Posts
- ✔ Innovative Quick-Fix mounting
- ✔ Reversible for left or right hand swing gates
- ✔ 5/8" adjustable in width, 3/8" in height and 3/8" in depth
- ✔ Vandal-proof
- ✔ Hinge socket, axle and socket cover plate in stainless steel

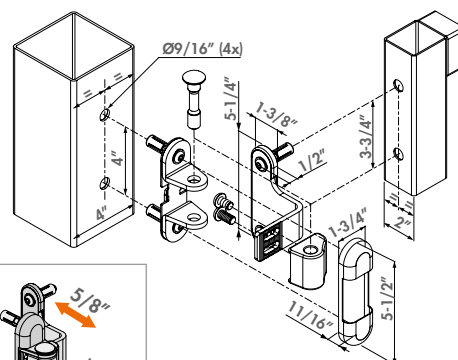

Hinge arm in stainless steel	Hinge arm in hot-dip galvanized steel	
<b>3DM-VP100-P50-A2</b>	<b>3DM-VP100-P50-HDG</b>	330 lbs



## Vandal-proof 4D-hinge for wooden gates


4DW (Patented)



Aesthetic, vandal proof hinge for wooden gates. The stainless steel hinge can be adjusted in 4 dimensions. Height, depth, left / right alignment and rotational direction can be adjusted. Adjustments can be made after installing the hinges. This way your gate is always perfectly aligned.

### Specifications

- ✓ 180° hinge for wooden gates
- ✓ Adjustable in 4 dimensions: height, depth, left / right alignment and rotational direction
- ✓  $\pm 2$ " longitudinal adjustability
- ✓ 3/4" depth adjustability (9/16" outside and 15/64" inside of fixed pole)
- ✓ Vandal-proof
- ✓ Available with 1 ft 3-3/4 inch or 1 ft 7-11/16 inch hinge arm
- ✓ Perfect in combination with the H-Wood lock and SHKW keep

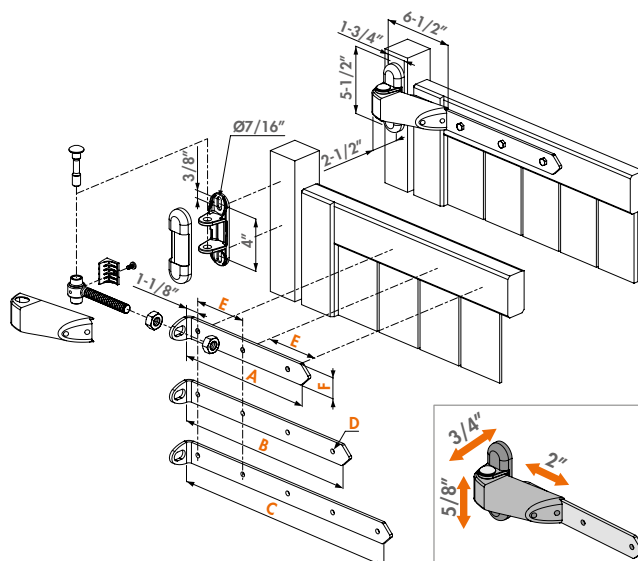

### Order codes

Hinge arm in stainless steel

4DW-300-A2

330 lbs

4DW-400-A2

330 lbs

4DW-500-A2

330 lbs

A	B	C	D	E	F
Length 11-13/16"			$\varnothing 3/8"$	4-5/16"	1-1/2"
	Length 15-3/4"		$\varnothing 3/8"$	4-5/16"	1-1/2"
		Length 19-11/16"	$\varnothing 3/8"$	4-5/16"	1-1/2"

## 180° 3-way strap hinge

3DW (Patented)




**24h  
SHIPPING**

Stainless steel strap hinge for wooden gates. The hinge is adjustable in three dimensions; height, left/right alignment and swing direction. This hinge is available with a stainless steel or hot-dip galvanized arm in two sizes.

### Specifications

- ✓ 180° hinge for wooden gates
- ✓ Reversible for left or right hand swing gates
- ✓ Vandal-proof
- ✓ Hinge socket, axle and socket cover plate in stainless steel

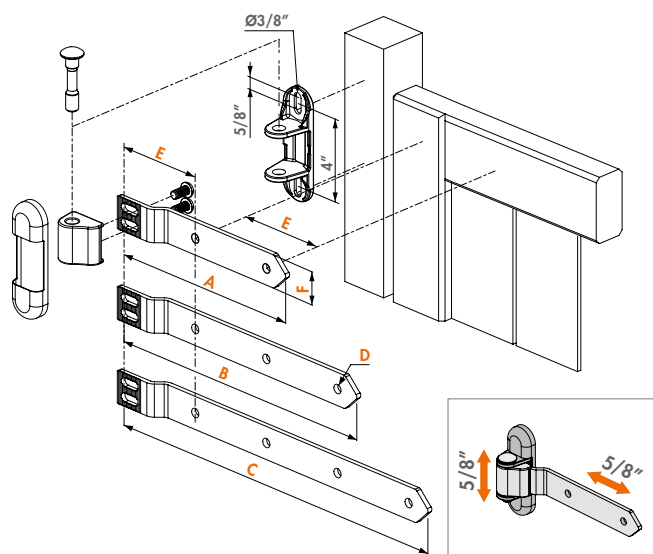

### Order codes

Hinge arm in stainless steel

3DW-250-A2

770 lbs

3DW-350-A2

770 lbs

Hinge arm in hot-dip galvanized steel

3DW-250-HDG

770 lbs

3DW-350-HDG

770 lbs

3DW-450-HDG

770 lbs

A	B	C	D	E	F
Length 9-13/16"			$\varnothing 7/16"$	4-5/16"	1-1/2"
	Length 13-3/4"		$\varnothing 7/16"$	4-5/16"	1-1/2"
		Length 17-3/4"	$\varnothing 7/16"$	4-5/16"	1-1/2"







**24h  
SHIPPING**

### Color options

ZILV 9005

### Specifications

- ✓ For gates up to 3.5 ft wide and 135 lb
- ✓ For left and right opening gates
- ✓ 5/8" adjustable in width and 7/8" in height
- ✓ No welding required: drill holes and fix with Quick-Fix

### Compatible with TIGER gate closer



TIGER  
P. 14


### Order code

PUMA




132 lbs

2 x Quick-Fix

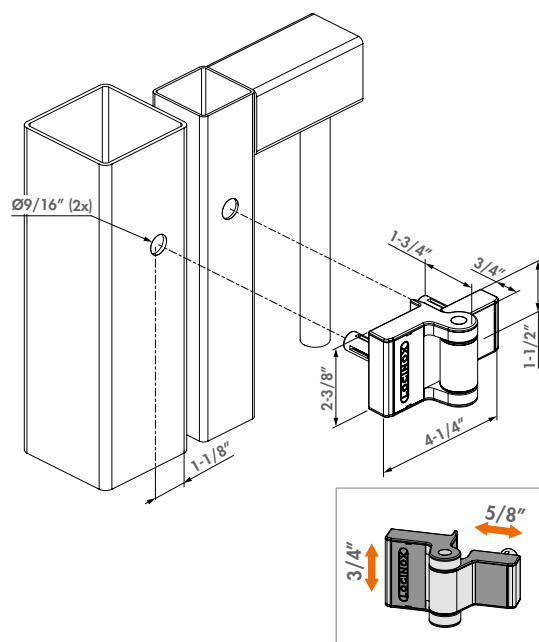

## Spring hinge for garden gates


SWING40 (Patented)

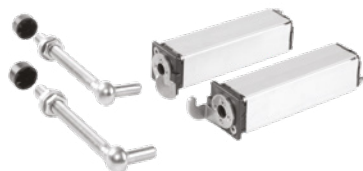

Adjustable spring hinges for garden and walk gates. The set can be fitted inside 1-1/2", 16 Ga tubing. The SWING can easily be adjusted in strength from outside by means of an Allen key.

### Specifications

- ✓ One for the top, one for the bottom
- ✓ Installation: slides into top and bottom of gate frame
- ✓ Only for gate frames 1-1/2" sq, 16 & 14 gauge
- ✓ Reversible: left or right hand
- ✓ Adjustable spring tension using 1/8" allen wrench
- ✓ Maximum gate width: 51"
- ✓ Maximum weight: 165 lbs

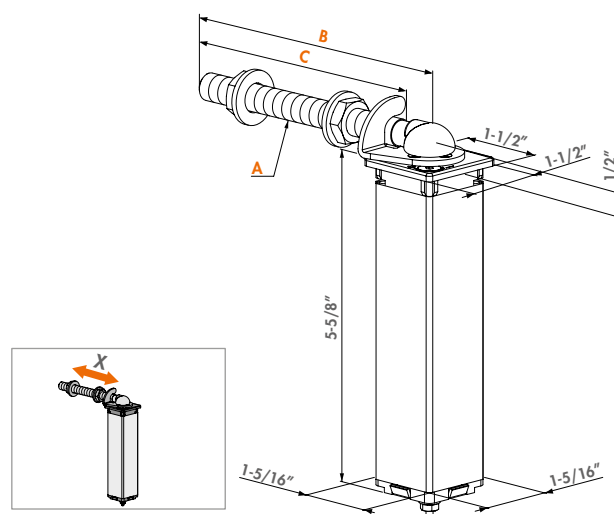

### Order codes

Hangerbolt length



SWING40-130

165 lbs

A	B	C
M12	Length 5-1/8"	4-5/16"
M12	Length 5-15/16"	5-1/8"

SWING40-150

165 lbs





## J-Bolt Stainless steel with polyamide plugs

GBM12

Stainless steel garden gate J-Bolt hinge set. The set consist of 2 threaded M12 stainless steel hinge bolts with polyamide hinge plugs. The poly plugs fit into the top and bottom of the gate upright for an economical quality solution for small garden and walk gate projects.

### Specifications

- ✓ Hinge J-bolt M12 in stainless steel
- ✓ Plug available for profile 1-1/2" or 2" square
- ✓ Length of the threaded J-bolt: 5-1/8" or 6" long
- ✓ Installation: plug slides into gate upright top and bottom


### Hinge part



1040TPS-M12-  
P. 134

### Order codes

For square profiles 1-3/16" x 1-3/16"		For square profiles 1-1/2" x 1-1/2"			A	B	C
<b>GBM12-30-130</b>	<b>GBM12-40-130</b>	130 lbs			M12	Length 5-1/8"	4-5/16"
<b>GBM12-30-150</b>	<b>GBM12-40-150</b>	130 lbs			M12	Length 5-15/16"	5-1/8"

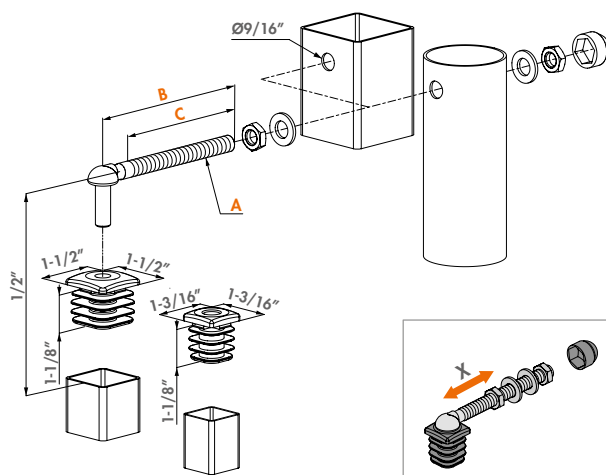

## J-Bolt Stainless steel with aluminum plugs

GBM12-DP (Patented)

Stainless steel garden gate hinge set with reinforced aluminum plugs for extra stability. The economical quality solution for all your garden/walk gate projects.



### Specifications

- ✓ Hinge set with aluminum reinforced hinge post plugs
- ✓ Hinge J-bolt M12 in stainless steel
- ✓ Plug available for profile 1-1/2" square
- ✓ Length of the threaded J-bolt: 5-1/8" or 6" long
- ✓ Installation: plug slides into gate upright top and bottom

### Hinge parts




1040TPS-M12-  
P. 134



DURA  
P. 133

### Order codes

Hangerbolt length			A	B	C
GBM12-DP-40-130		165 lbs	M12	Length 5-1/8"	4-5/16"
GBM12-DP-40-150		165 lbs	M12	Length 5-15/16"	5-1/8"

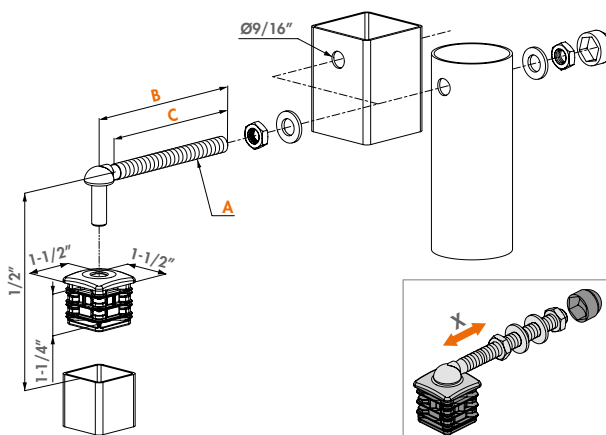



## J-Bolt Stainless steel with polyamide plugs

GBM16

Hot-dip galvanized J-Bolt hinge set. The set consist of 2 threaded M16 galvanized hinge bolts with polyamide hinge plugs. The reinforced plugs fit into the top and bottom of the gate upright for an economical quality solution for your walk gate projects.

### Specifications

- ✓ With plastic hinge plug square 9/16"
- ✓ Hinge axle M16 in hot-dip galvanized steel
- ✓ Length of the threaded J-bolt: 6-1/4" or 7"
- ✓ Installation: plug slides into gate upright top and bottom

### Hinge part



1040HDSM16-  
P. 134

### Order codes

Hangerbolt length


GBM16-40-160

GBM16-40-180



165 lbs

165 lbs

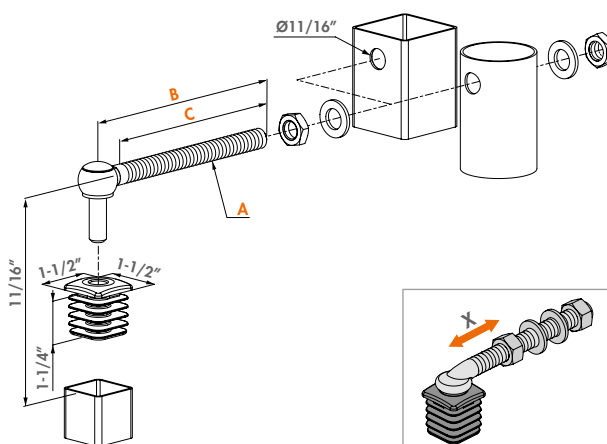

## J-Bolt Stainless steel with aluminum plugs

GBM16-DP (Patented)

Hot-dip galvanized steel garden gate hinge set with reinforced aluminum plugs for extra stability. The economical quality solution for all your garden/walk gate projects.



### Specifications

- ✓ Hinge set with aluminum reinforced hinge post plugs
- ✓ Hinge axle M16 in hot-dip galvanized steel
- ✓ Plug available for profile 1-1/2" or 2" square
- ✓ Length of the threaded J-bolt: 6-1/4" or 7"
- ✓ Installation: plug slides into gate upright top and bottom

### Hinge parts



1040HDSM16-  
P. 134

DURA  
P. 133

### Order codes

For square profiles 1-1/2" x 1-1/2"

For square profiles 2" x 2"



220 lbs

220 lbs

A

B

C

GBM16-DP-40-160


GBM16-DP-50-160

GBM16-DP-40-180

GBM16-DP-50-180

M16 Length 6-5/16" 5-5/16"

M16 Length 7-1/16" 6-1/8"

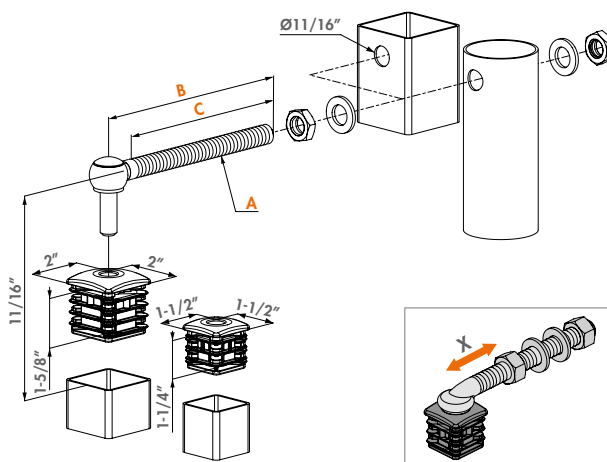



## J-Bolt Stainless steel

GAM12

Stainless steel garden gate J-Bolt hinge set. The set consists of 2 threaded M12 stainless steel hinge bolts with 2 black steel welding ears. The economical quality solution for your garden and walk gate projects.

### Specifications

- ✓ Hinge J-bolt M12 in stainless steel
- ✓ Length of the threaded J-bolt: 5-1/8" or 6" long
- ✓ Welding ear in black steel

### Hinge parts



1040TPS-M12-  
P. 134



1041-01  
P. 133

### Order codes

Hangerbolt length

GAM12-130



220 lbs

A

B


C

M12 Length 5-1/8" 4-5/16"

GAM12-150

220 lbs


M12 Length 5-15/16" 5-1/8"

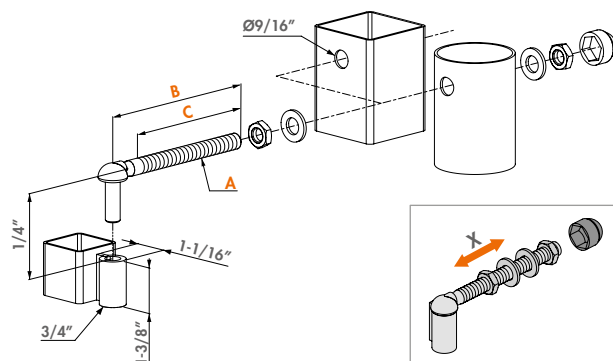

## Welding ear in black steel

1041-01

Welding ear in black steel. Compatible with hinge axle 1040TPS-M12. Just weld on the ear to your gate and it's ready for coating. A basic hinge solution for your small garden gates.



### Specifications

- ✓ Component of the GAM12 hinge

### Order code

1041-01

A

For hangerbolt axle Ø1/2"

## Aluminum reinforced post plug for hinges

DURA (Patented)

Hinge plug reinforced with aluminum for extra stability



### Specifications

- ✓ Aluminum reinforced hinge plug

### Order codes

For 1040-TPS-M12

For 1040-HDS-M16

DURA-4040-12

DURA-4040-16

DURA-5050-16

A


B

C

D

1-1/4" 1-9/16" Ø7/16"-Ø9/16" 1-9/16"

1-7/8" 2" Ø9/16" 2"







## Stainless steel hinge axle M12

1040TPS-M12-

Stainless steel hinge axle M12. Available in 2 versions: 5-1/8" or 5-15/16".

### Specifications


- ✓ Stainless steel hangerbolt M12

### Order codes

Hangerbolt length

1040TPS-M12-130

1040TPS-M12-150



A	B	C
M12	Length 5-1/8"	4-5/16"
M12	Length 5-15/16"	5-1/8"



## Hot-dip galvanized hinge axle M16

1040HDSM16-

Hot-dip galvanized hinge axle M16. Compatible with hinge plug DURA-4040-16 and DURA-5050-16.

### Specifications


- ✓ Hot-dip galvanized hangerbolt M16

### Order codes

Hangerbolt length

1040HDS-M16-160

1040HDS-M16-180



A	B	C
M16	Length 6-5/16"	5-5/16"
M16	Length 7-1/16"	6-1/8"











# Drop bolts & Ground catchers

---

The Locinox range of drop bolts and ground stops offers a wide array of solutions. From the economical VSF dropbolt to our internal SUBY dropbolt, which is the top of the line in terms of ease of use and aesthetics.

---



138 Drop bolts



142 Ground catchers



## Internal drop bolt

SUBY (Patented)

Internal aluminum drop bolt. An aesthetical solution for double leaf gates, the drop bolt disappears from view. The drop bolt is conveniently operated at waist height and if the handle is installed between the gate leaves, it becomes self locking. It fits inside 1-1/2" to 2-1/2" square tubing.



### Color options


6005 6009 9005 ZILV

### Specifications

- ✓ Height adjustability of the drop bolt: 4"
- ✓ Throw: 4-3/4"
- ✓ Internal dropbolt in aluminum
- ✓ Steel handle with black plastic coating (POM) provides the optimal combination between robustness, ergonomics and protection against corrosion
- ✓ Internal push spring guarantees a perfect closure (even if the drop bolt is blocked by dirt inside the ground stop) and prevents overpressure
- ✓ Designed for profiles up to 1/8" thick
- ✓ Fast & easy mounting: 2 screws
- ✓ User-friendly manipulation of the drop bolt at a convenient height
- ✓ For square gate profiles: 1-1/2", 2", or 2-1/2" and for rectangular gate profiles: 2-3/8" x 1-1/2"

### Order code

**SUBY** For gate profiles 1-1/2" x 1-1/2", 2" x 2", 2-1/2" x 2-1/2" and 2-1/2" x 1-1/2"

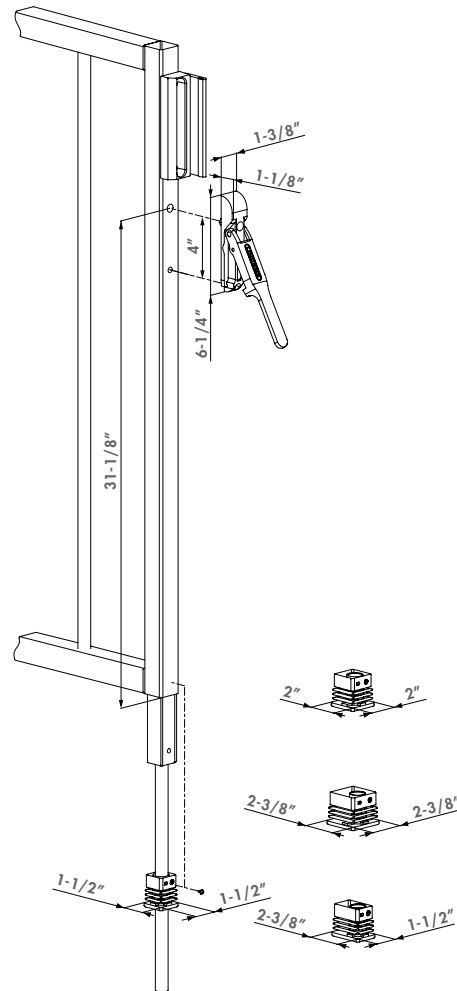

### Compatible ground stop



CGS  
P. 142



EGS  
P. 143



## Electrical drop bolt

ELECTRADROP (Patented)

Electrical 24V drop bolt with 4-1/2" throw for safe locking of automated swing gates. By securing your gate with a drop bolt you disburden the electric gate motors.

**24h  
SHIPPING**



### Color options




### Specifications

- ✓ Vandal proof, powder coated aluminum housing
- ✓ To be connected to the warning light on automated gates (min 3 sec prewarning signal) or directly on the gate automation
- ✓ Mechanical release possible (by key) in case of emergency
- ✓ Fitted with relay for drop bolt detection
- ✓ Obstacle detection with automatic stop of the drop bolt in case of a pressure exceeding 40 lbs
- ✓ Consumption: 25 W / Standby: 0,2 W
- ✓ 16-1/2 ft cable included
- ✓ Included: 3012-37-STD-VSZ cylinder
- ✓ To connect to a Locinox DC-POWER-24V-25W power supply

### Order code

**ELECTRADROP** For profiles 1-1/2" x 1-1/2" or more

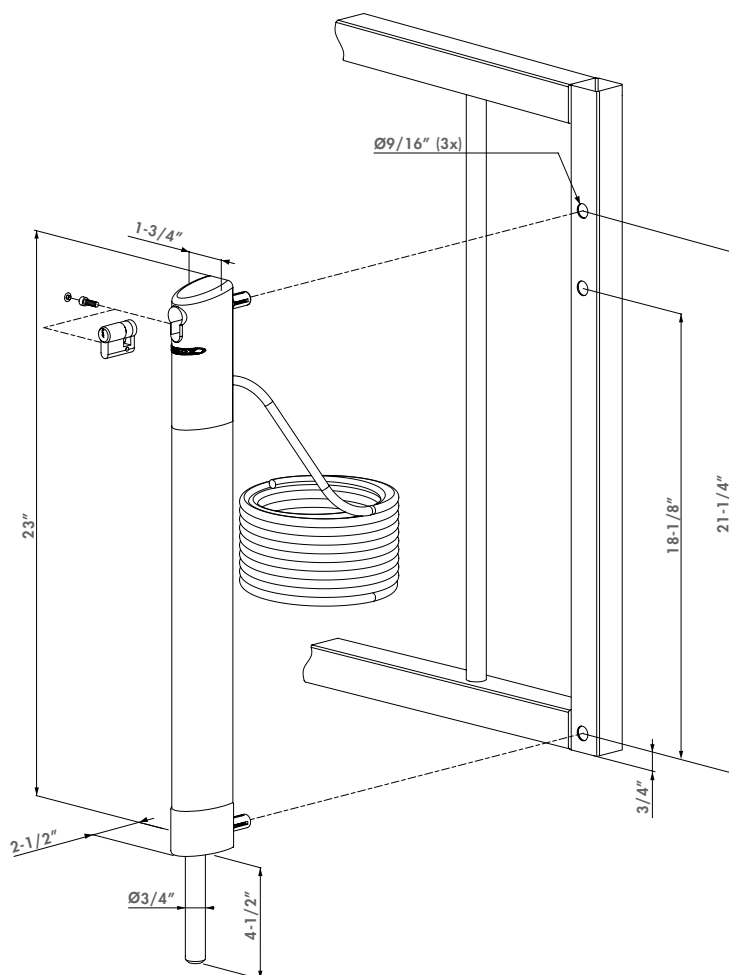

### Compatible ground stop & power supply



OGS  
P. 142



DC-POWER-24V-25W  
P. 46





## Key Lockable drop bolt

KEYDROP (Patented)

Key lockable drop bolt. It is surface mounted for easy access and installation. It can be keyed to match the gate lock on the facing leaf. The KEYDROP enables you to lock the drop bolt in open or closed position. It is installed with our Quick-Fix mounting hardware and is interchangeable with our standard VSF and VSA drop bolts.

**24h**  
SHIPPING



### Color options

6005

6009

9005

7016


ZILV

24h  
SHIPPING

24h  
SHIPPING

### Specifications

- ✓ Throw: 5-1/2"
- ✓ Lockable drop bolt with cylinder
- ✓ Same drilling pattern as VSF and VSA
- ✓ Possible to match same key as gate lock
- ✓ Height adjustability of the drop bolt: 4"
- ✓ Height adjustability in 3 positions: 2" / position
- ✓ The gate can be locked in open or closed position
- ✓ For gate profiles 1-1/4" sq or larger

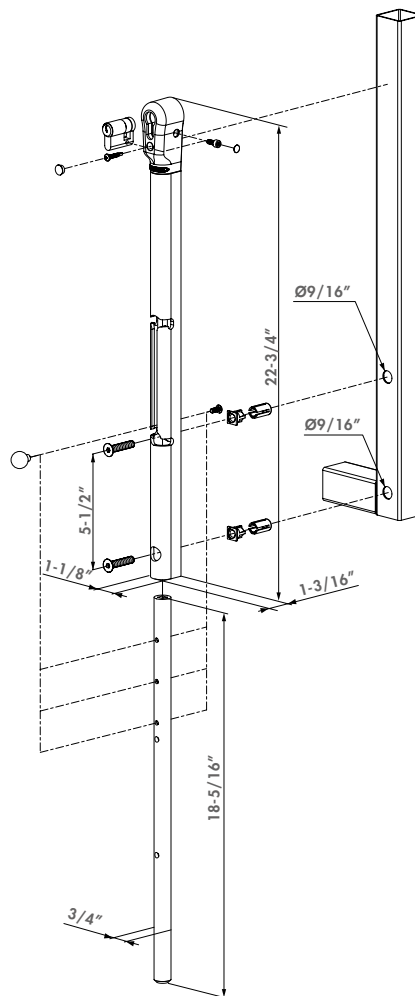

### Order code

**KEYDROP** For profiles 1-1/2" x 1-1/2" or more **24h**  
SHIPPING



### Compatible ground stop



OGS  
P. 142



EGS  
P. 143



## VSA / VSF




## 6005



- ✔ Type VSF: hot-dip galvanized bolt
- ✔ Type VSA: aluminum bolt
- ✔ With aluminum head block
- ✔ For gate profiles 1-1/2" or more
- ✔ Height adjustability of the drop bolt: 4"
- ✔ Throw: 5-1/2"
- ✔ Self-locking between the leaves
- ✔ Fast and easy fixation with Quick-Fix
- ✔ Easy to retrofit

**VSF-K-QF1BL** With hot-dip galvanized pin

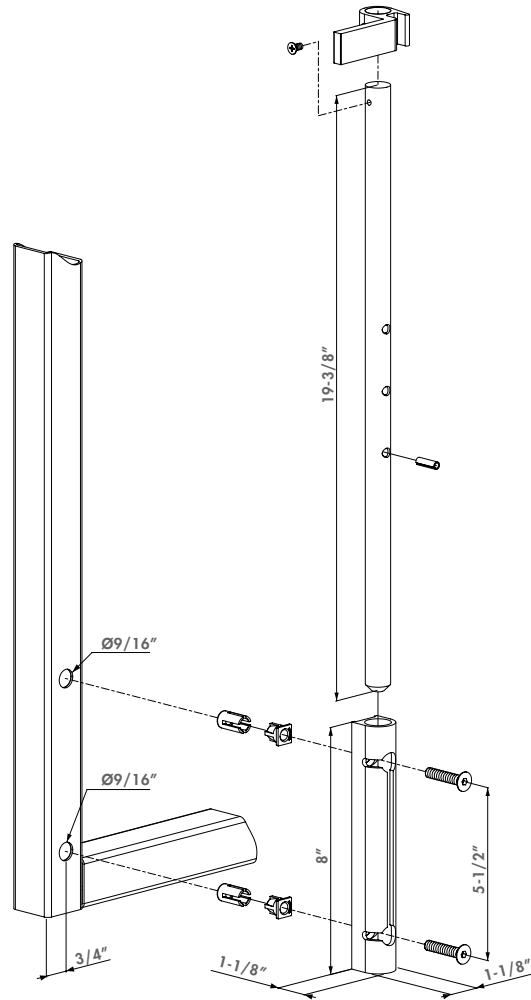

EGS  
P. 143


## Centered ground stop and catch

CGS



### Specifications

- ✓ Glass fiber reinforced polyethylene
- ✓ Only suitable with internal SUBY drop bolts
- ✓ Adjustable stop plate for 1-1/2" to 2-1/2" gate frames
- ✓ Removable polyamide cleaning recipient
- ✓ With water drain hose

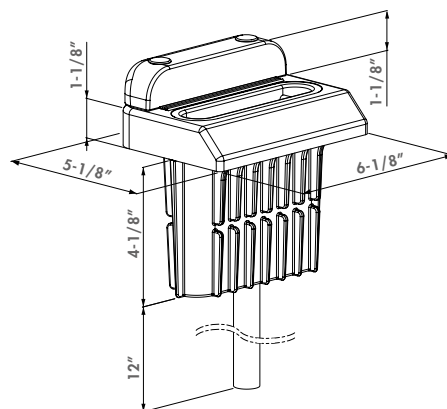

### Compatible drop bolt



SUBY  
P. 138

### Order code

CGS Adjustable stop plate for 1-1/2" to 2-1/2" gate frames

## Off-centered ground stop and catch


OGS



**24h  
SHIPPING**

### Specifications

- ✓ Glass fiber reinforced polyethylene
- ✓ Suitable for surface mounted drop bolts (VSF - VSA - ELECTRADROP - KEYDROP)
- ✓ Adjustable stop plate for 1-1/2" to 2-1/2" gate frames
- ✓ Removable polyamide cleaning recipient
- ✓ With water drain hose

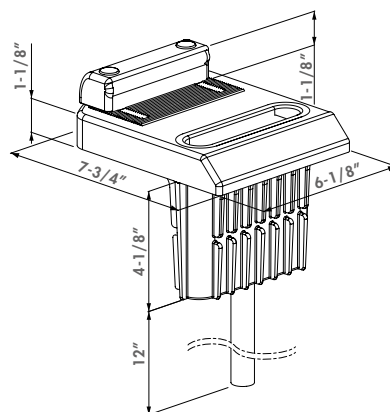

### Compatible drop bolts



ELECTRADROP  
P. 42



KEYDROP  
P. 140



VSA / VSF  
P. 141

### Order code

OGS Adjustable stop plate for 1-1/2" to 2-1/2" gate frames





## Economic ground catch for drop bolt


EGS

Economic ground catch/drop bolt receiver for drop bolts with maximum bolt of 3/4". With draining hole.

**24h**  
**SHIPPING**

### Specifications

- ✓ Simple and economic In-ground catch designed to put in concrete
- ✓ Without stop plate
- ✓ Hot-dip galvanized base-plate with polypropylene catcher
- ✓ For drop bolts with a maximum bolt diameter of 3/4"

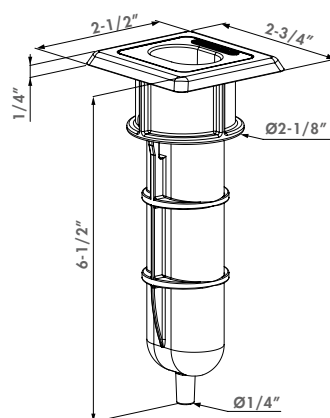

### Compatible drop bolts



SUBY  
P. 138



KEYDROP  
P. 140



VSA / VSF  
P. 141



ELECTRADROP  
P. 42

### Order code

**EGS** Economic ground stop, without stop plate








# Gate catchers

Gate catchers hold your gate open without inflicting any damage. They are adjustable in height to fit your gate and the used profiles. The gate catchers are made of aluminum or hot-dip galvanized steel.



146 Hot-dip galvanized gate catchers



147 Aluminum gate catchers








## Gate hold-back catch hot-dip galvanized

ABK

Galvanized steel gate hold back. The adjustable catch reaches through the gate and is designed to catch a horizontal profile. It is to be set into concrete for a secure installation. For gate profiles up to 2".

### Specifications

- ✓ Hot-dip galvanized U-profile in steel
- ✓ Catch hook in aluminum
- ✓ Height adjustability: 2-1/16"

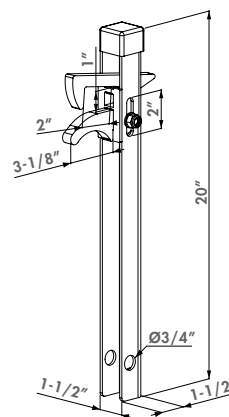

### Alternative gate catchers



UGC  
P. 147



IGC  
P. 147

### Order code

**ABK** For gate profiles with a max. width of 2"




## Gate hold-back catch hot-dip galvanized

ABL

Galvanized steel gate hold back. The adjustable catch reaches through the gate over the bottom rail. It is designed to be set into concrete. The catch hook is 2" adjustable in height. For gate profiles up to 2".

### Specifications

- ✓ Hot-dip galvanized U-profile in steel
- ✓ Stainless steel bolt
- ✓ Catch hook in aluminum
- ✓ Height adjustability: 2-1/16"

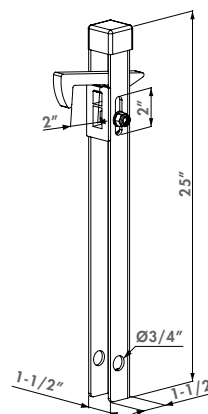

### Alternative gate catchers



UGC  
P. 147



IGC  
P. 147

### Order code

**ABL** For gate profiles with a max. width of 2"




**24h  
SHIPPING**

#### Color options



#### Specifications

- ✓ Aluminum silver coated chassis
- ✓ Anchoring holes to put in concrete
- ✓ Height adjustability of the catch hook: 1-1/2"
- ✓ Rubber stop and polyamide catch hook avoid damaging the gate frame
- ✓ Rubber stop adjustable for profiles 1-1/2" to 2-1/2" gate frames
- ✓ Reversible catch hook: pre-mounted with hook up
- ✓ Catches bottom side of the gate

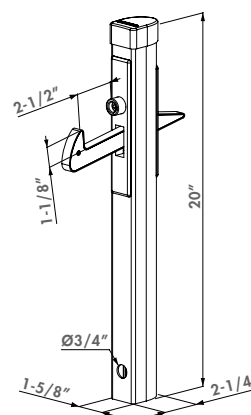

#### Order code

**UGC** Under Gate Catch for 1-1/2" to 2-1/2"




**24h  
SHIPPING**

#### Color options



#### Specifications

- ✓ Aluminum silver coated chassis
- ✓ Anchoring holes to put in concrete
- ✓ Height adjustability of the catch hook: 1-1/2"
- ✓ Rubber stop and polyamide catch hook avoid damaging the gate frame
- ✓ Rubber stop adjustable for profiles 1-1/2" to 2-1/2" gate frames
- ✓ Reversible catch hook: pre-mounted with hook down
- ✓ Catches upper side of the gate

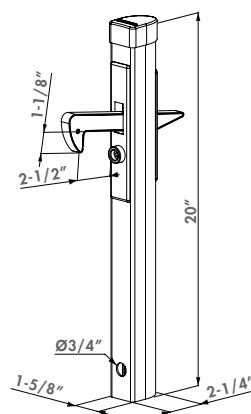

#### Order code

**IGC** In-Gate Catch for 1-1/2" to 2-1/2"





# Tooling

---

Locinox guarantees a quick, qualitative and perfect installation thanks to the in-house developed calibres.

---



150 Tools for locks & keeps



152 Tools for gate closers



156 Miscellaneous




## Drilling jig for swing gate locks

3970USA

Drilling jig to prepare the gate-/strike-post for LA- / LE- / LM-locks and according keeps (SA / SH / SM). The jig can be adjusted for profiles 1" / 1-1/4" / 1-1/2" / 1-3/4" / 2" / 2-1/2". The jig guarantees a perfect center alignment of the lock/keep on your posts.

### Specifications

- ✓ Drilling jig for surface mounted swing gate locks and its keeps
- ✓ Adjustable for profiles from 1-1/2" - 2" - 2-1/2"

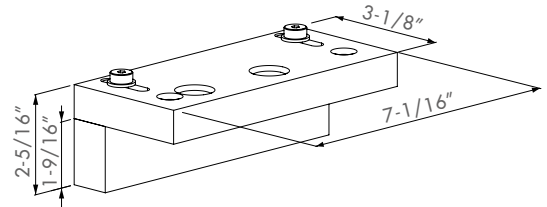

### Order code

3970USA

For swing gate locks




## Drilling jig (Special Order Only)

3970LS

Drilling jig to prepare the gate- and strike-post for sliding gate locks and according keeps. The jig can be adjusted for profiles 1-1/2" - 2" - 2-3/8" or 2-3/8" - 3-1/8" according to jig version. The jig guarantees a perfect center alignment of the lock/keep on your posts.

### Specifications

- ✓ Drilling jig for: LS- & LL-locks and SSKZ/SSKO keeps
- ✓ Available in two versions: for profiles: 1-1/2" - 2" - 2-3/8" or 2-3/8" - 3-1/8"

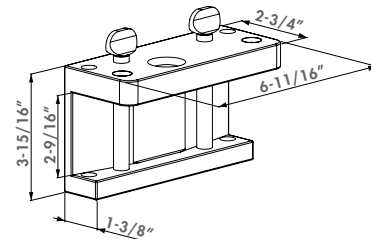

### Order codes

3970LS-4060

For sliding gate locks 1-9/16" - 2" - 2-3/8"

3970LS-6080

For sliding gate locks 2-3/8" - 3-1/8"



## Drilling bit Ø 15 mm (5/8") with drill-chuck Ø 13 mm (1/2")


DRILLØ15

HSS drill with Ø15 mm (5/8") and drill-chuck Ø 13 mm (1/2"). Fits any hand drilling machine.

**24h  
SHIPPING**

### Specifications

- ✓ Drilling bit Ø9/16" with drill-chuck Ø1/2"
- ✓ For preparation of your profiles
- ✓ For use with the drilling jig 3970USA

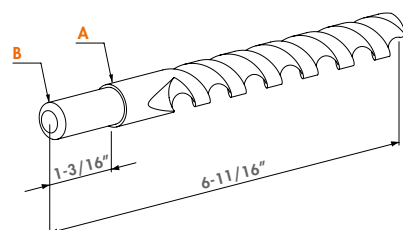

### Order code

DRILLØ15

A B  
Ø9/16" Ø1/2"

**NEW**

## Tool case with drilling jig for surface mounted locks and corresponding keeps

DRILL-FIX




**24h**  
SHIPPING



Quickly and accurately install Locinox locks and keeps with our brand new Drill-Fix jig. This jig is designed to self-center on square or round posts, and guarantees perfect alignment. This will allow you to easily drill the 4 hole pattern for the lock or the two holes necessary for the keep. Seamless installs in a flash. The Drill-Fix comes in a sleek and sturdy case that includes all the necessary accessories to install Locinox locks and keeps.

### Specifications

- ✓ Tool case with self-centering drilling tool for fast assembly of Locinox surface mounted gate locks and keeps
- ✓ Drill jig can be used for round, square or rectangular profiles from 30 up to 76mm (1-1/4" up to 3")
- ✓ Includes 3 drill bits (Ø9,5 mm, Ø15 mm, Ø18 mm)
- ✓ Useful for installation of Locinox bolt-on locks and keeps in 4 easy steps
- ✓ Includes LA Locitool
- ✓ Includes Allen Key and positioning pin

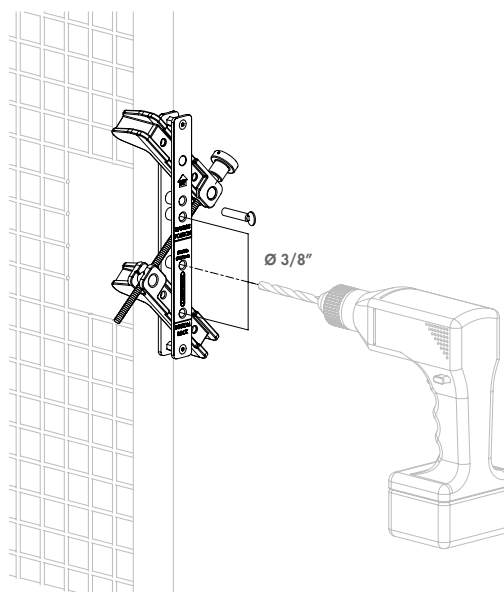

### Order code

**DRILL-FIX** Tool case with drilling jig for lock and keep **24h** SHIPPING

### 4 Easy installation steps



### Compatible locks



**LAKQ U2**  
P. 59



**LDKZ D1**  
P. 65



**LMKQ V2**  
P. 66



**LAKQ H2**  
P. 71

### Compatible keeps



**MODULEC-SA**  
P. 29



**SAKL QF**  
P. 95



**SHKL QF**  
P. 95



**SMK L QF**  
P. 96





**NEW**

## Installation and Drilling jig for Tiger gate closer

TIGERDRILL




**24h  
SHIPPING**



Tool case with installation and drilling jig to perfectly align and install the Tiger gate closer and its Puma hinge. This tool guarantees perfect alignment and a fast and easy installation. No measuring needed, just fix the tool on the post, drill the holes, install the Tiger and Puma, and close the gate.

### Specifications

- ✓ Includes 2 drill bits Ø5 mm and Ø15 mm
- ✓ Spare set with 10 Quick-Fix expanders
- ✓ Solid plastic box with compartments for convenient storage
- ✓ Includes accessories for assembly and adjustment of Tiger
- ✓ Recommended to be combined with Drillvise-IV

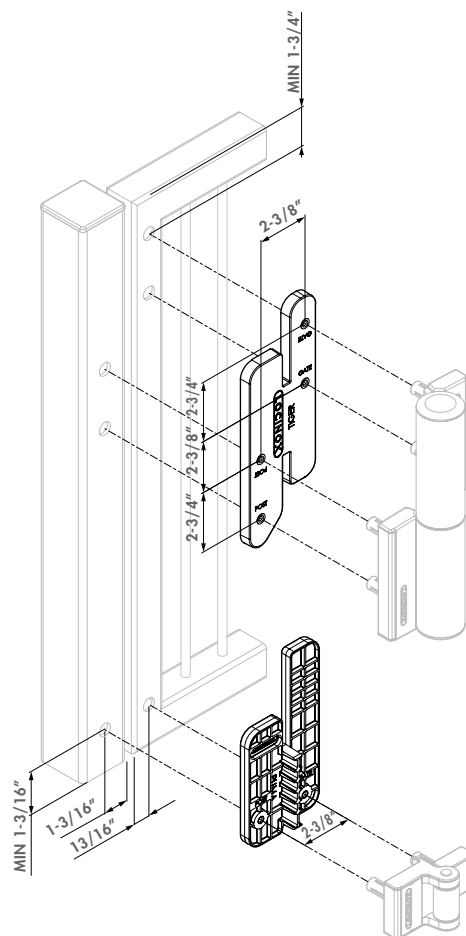

### Order code

**TIGERDRILL** Installation and drilling jig for Tiger gate closer **24h  
SHIPPING**

### Recommended accessories



**DRILLVISE-II**  
P. 155



**DRILLVISE-IV**  
P. 155

**NEW**

## Installation and Drilling jig for Rhino gate closer


RHINODRILL



Tool case with installation and drilling jig to perfectly align and install the Rhino gate closer on the existing hinges. This tool guarantees perfect alignment, fast and easy installation. There is no more measuring needed, just fix the tool on the post, drill the holes, install the Rhino and close the gate.

### Specifications

- ✓ Includes 2 drill bits Ø5 mm and Ø15 mm
- ✓ Spare set with 10 Quick-Fix expanders
- ✓ Solid plastic box with compartments for convenient storage
- ✓ Positions Rhino perfectly with regards to the Locinox hinge
- ✓ Includes accessories for assembly and adjustment of Rhino

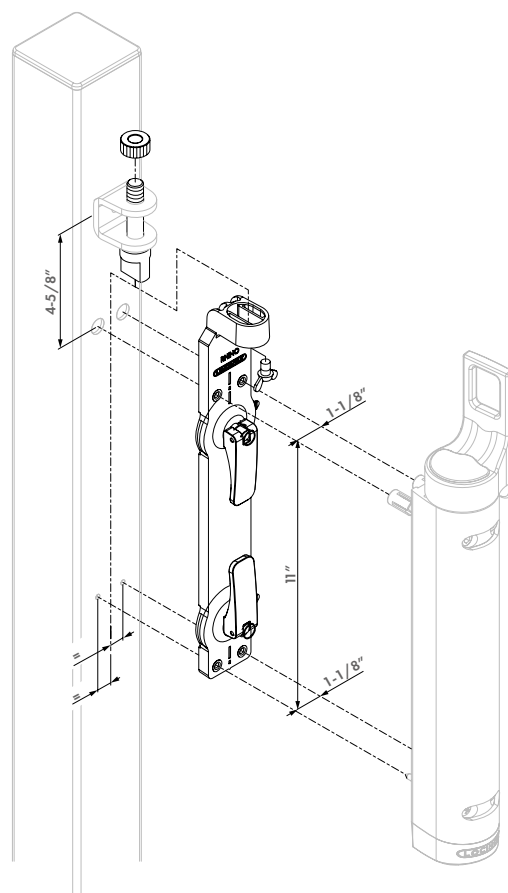

### Order code

**RHINODRILL** Assembly and drill calibre for Rhino gate closer

### Recommended accessories



**DRILLWISE-II**  
P. 155



**DRILLWISE-IV**  
P. 155




**NEW**

## Assembly and drill calibre for Lion and Verticlose-2 gate closers

**LION-VTC-DRILL****24h  
SHIPPING**

### Specifications

- ✓ Sturdy case with compartments
- ✓ Spare set with 10 Quick-Fix expanders
- ✓ Includes 2 drill bits Ø5 mm and Ø15 mm

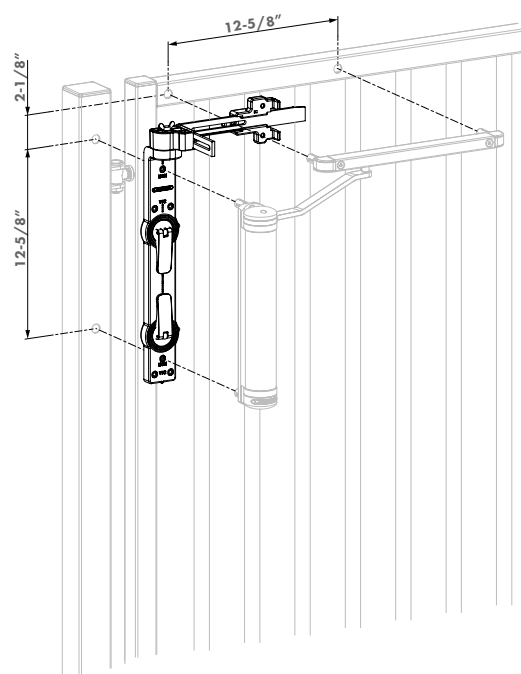

### Order code

**LION-VTC-DRILL** Installation and drilling jig for Lion & VTC-2 gate closers **24h  
SHIPPING**

### Related products

**DRILLWISE-II**  
P. 155**DRILLWISE-IV**  
P. 155






## Clamp set for gate frame positioning

### DRILLVISE-II

Handy toolbox with all components to position the gate frame as opposed to the fixed post upon assembly of the hinges, gate closers and other accessories.

#### Specifications

- ✓ Solid plastic box with compartments for convenient storage
- ✓ 2 special clamps with 1-3/16" to 4-3/4" adjustability with support plates to position gate frames
- ✓ Strong steel clamp with padding to avoid damage

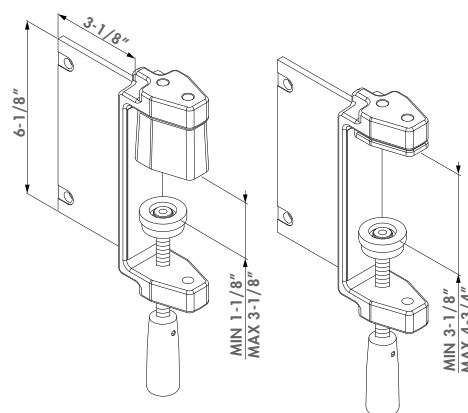

#### Related products



**TIGERDRILL**  
P. 152



**RHINODRILL**  
P. 153

#### Order code

**DRILLVISE-II** Clamp set for gate frame positioning

## Toolbox with 4 Locinox clamps


### DRILLVISE-IV

Toolbox with set of 4 clamps to fix drill tools and accessories for assembly or installation. Perfect when combined with Tigerdrill for installation Tiger gate closer.



#### Specifications

- ✓ Solid plastic box with compartments for convenient storage
- ✓ 4 special clamps with 1-3/16" to 4-3/4" adjustability
- ✓ Strong steel clamp with padding to avoid damage
- ✓ Soft plastic mounting surfaces guarantee a perfect grip without risk of damage

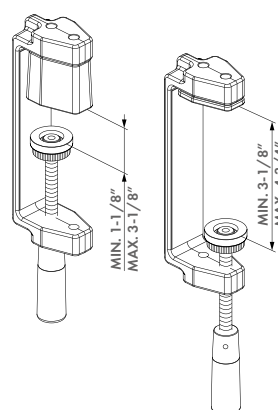

#### Related products



**TIGERDRILL**  
P. 152



**RHINODRILL**  
P. 153

#### Order code

**DRILLVISE-IV** Toolbox with 4 Locinox clamps



## Stainless steel fixation bolt with high pulling resistance

QUICK-FIX (Patented)

Quick-Fix guarantees an easy, fast and highly robust mounting. The new generation of the Quick-Fix can be reused completely many times thanks to its innovative design.


### Specifications

- ✓ Patented mounting system out of stainless steel
- ✓ Very strong: 2000 lbs pulling resistance
- ✓ Innovative design which guarantees reuse of the Quick-Fix
- ✓ Short version: for profiles with thickness till 3/16"
- ✓ Long version: for profiles with thickness from 3/16" till 5/16"

### Order code

QUICK-FIX

Patented mounting system

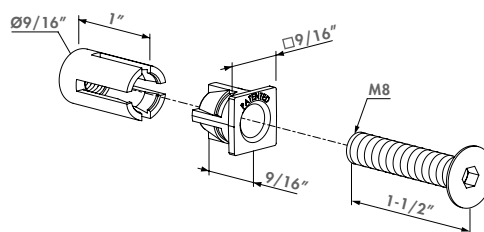


## Quick-Fix Expander 11/16" or 15/16"

QF-EXP

Spare expanders of the old Quick-Fix in case of loss or maintenance.

### Specifications

- ✓ Available in lengths of 1" for min. profile 1-1/2" (recommended) or 11/16" for profile 1-3/16"



### Order codes

QF-EXP-M8-17

A

Length 11/16"

QF-EXP-M8-24

Length 1"

# Quick-Fix

The unique Quick-Fix fastening system guarantees an extremely secure fixing on all your gates and fences. As a unique patented solution, Quick-Fix ensures an assembly which is twice as quickly.

### QUICK ASSEMBLY

Quick-Fix is pre-assembled on the product. You win valuable time on site, which allows you to be quicker with your next customer. You only need to drill the required 9/16" holes, place the product on the holes, fix and ready!

### FIRM ANCHORING

With its 2.000 lbs tensile strength a firm anchoring is always guaranteed. Quick-Fix is available for profiles with a wall thickness from 1/16" to 3/16".

### CORROSION FREE

Locinox relies upon the best materials. This also applies to Quick-Fix which is 100% made of premium stainless steel. Quick-Fix easily passes the 1,000h salt spray test. Want to know more? Watch the video on our website.





**24h  
SHIPPING**


## Handy mounting tool for locks

LOCITOOL LA

Mounting tool for surface mounted gate locks. The Locitool has a 3 mm Allen key for the adjustment of the bolts and fixing of the handles. With the 6 mm Allen key you can fix all Locinox locks. The screwdriver can be used to change the cylinder, open the lock box or change the daybolt from right to left-turning.

### Specifications

- ✓ Easy and robust installation tool for a complete installation and adjustment of any Locinox lock
- ✓ Phillips screwdriver to change the self-latching bolt, cylinder and lockbox

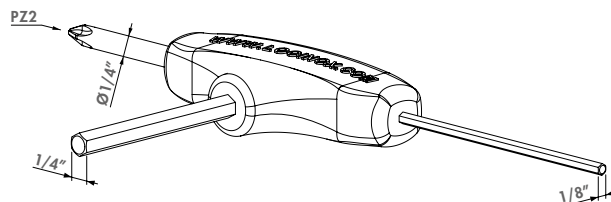

### Order code

LOCITOOL LA

Mounting tool for locks



**24h  
SHIPPING**


## Handy mounting tool for gate closers

LOCITOOL LB

Mounting tool for gate closers. The Locitool has an M3 allen key for the adjustment of the closing speed and power of the gate closer. With the M4 allen key you can adjust the closing power of the gate closers. The M5 allen key is used for the Quick-Fix fixation.

### Specifications

- ✓ Easy and robust installation tool for a complete installation and adjustment of any Locinox gate closer

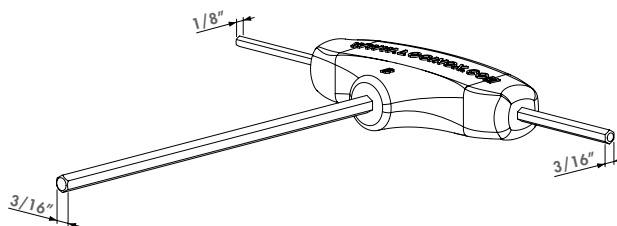

### Order code

LOCITOOL LB

Mounting tool for gate closers



**24h  
SHIPPING**


## Adjustable rollerbolt

ROLLTOP

Stainless steel "rollerbolt" for LA-locks. It fits Industrial, Ornamental, Mechanical, Electrical, and Swimming Pool locks. The standard chamfered latch tip can be replaced with the rollerbolt to reduce latch resistance and allow the gate close and latch easier. This ensures a smooth closing of the lock into the keep. The rollerbolt has a bolt adjustment hole for latch bolt length adjustment.

### Specifications

- ✓ Adjustable rollerbolt in stainless steel
- ✓ Reduces latch resistance and allows the gate close easier
- ✓ Compatible with all surface mounted Locinox gate locks



### Order codes

ROLLTOP-30

ROLLTOP-40

ROLLTOP-60

A	B
11/16"	1-1/8"
1"	1-7/16"
1-13/16"	2-3/16"





# Accessories

---

Modularity, compatibility and flexibility within our product range give you an endless amount of solutions. Build your own product to fit your production processes and product range. Locinox makes sure your orders are handled quickly and correctly.

---



160 Handles

168 Adaptor plates



173 Cylinders


177 Accessories for gates



179 Post plugs & caps

181 Security strips

# i Handle compatibility



SURFACE MOUNTED LOCKS			INSERT LOCKS			
			A = 1-3/8"	A = 1-1/2"	A = 2"	A = 2-3/8"
3006C		✓	✓			
3006I		✓	✓	✓		
3006D		✓	✓			
3006M		✓	✓			
3006J		✓	✓	✓		
3006R		✓				
300FA		✓	✓			
3006P		✓	only for P1 lockbox			
3006G		✓	✓	✓		
3006C-H						✓
3006I-H					✓	✓
3006M-H				✓	✓	✓
3006J-H		✓	✓	✓	✓	✓
3006R-2		✓	✓			
KIDLOC-2		✓				
KIDLOC		✓	✓	✓		
3006KR		✓				
PUSHBAR		✓		✓	✓	
3006PUSH		✓				
3006T11		✓				






## Childproof security knob

KIDLOC (Patented)

Anodized aluminum and polyamide security knob providing child safety. At least one button must be pressed while turning the knob. Impossible for children younger than 5 years, conform to swimming pool standard NF P90-306.

### Specifications

- ✓ Polyamide and stainless steel
- ✓ For all locks with a 8 mm shaft (appx 5/16")
- ✓ Security knob for swimming pools, playgrounds, kennels,...
- ✓ Conforms to the European swimming pool standard NF P90-306

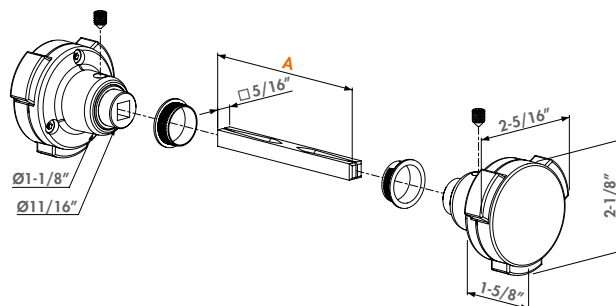

### Order code

Security knob

**KIDLOC**

**A**

Follower length 3-9/16"



**24h  
SHIPPING**


## Aluminum knob blocking set

3006KR

Aluminum round blocking knob set. The kit allows the following three combinations: one side fixed with one side operational, both sides fixed, or one side blocked with one side operational. The set is recommended in combination with our gate locks when access control is needed and allows our standard Ornamental or Industrial locks to be used in the following applications: Free Exit, Dead Latch, or Store Room.

### Specifications

- ✓ The kit permits the following combinations:
- ✓ 1 side blocked or blinded or 1 side working (movable)
- ✓ 2 sides blocked
- ✓ 2 sides working (movable)
- ✓ Highly recommended with Locinox electric strikes

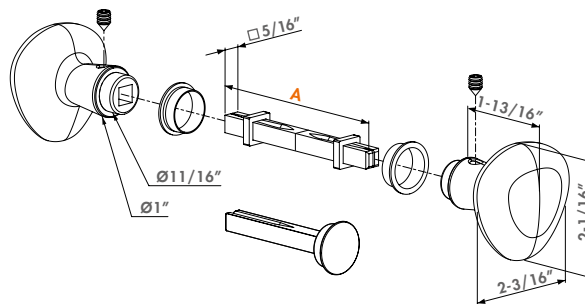

### Order code

Aluminium handle blocking set

**3006KR**

**A**

Follower length 3-9/16"



**24h  
SHIPPING**

## Handle set 3006PULL

3006PULL

This aluminum powder coated handle set has an elegant design. This handle set could be used in combination with magnetic locks (e.g. if used top/bottom), or any gate that needs a sturdy and elegant pull handle independent of the latching mechanism.

### Color options



### Specifications


- ✓ Aluminum powder coated handle
- ✓ Combination possible with MAGMAG lock on top and bottom
- ✓ Matching design with our magnetic locks

### Order code

Aluminium powdercoated handle set

**3006PULL**

Fixation bolts not included

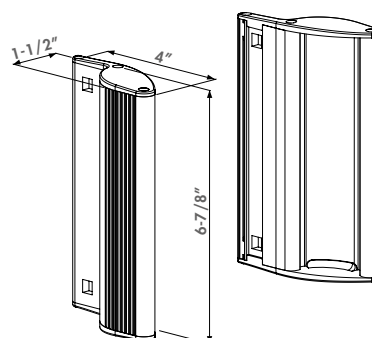

## Push handle set in aluminum

3006PUSH




**24h  
SHIPPING**

### Color options



### Specifications

- ✓ The set is adaptable on all surface mounted Locinox locks with aluminum U-lock box
- ✓ The 3006PUSH replaces the handles
- ✓ Facilitates the opening of the gate

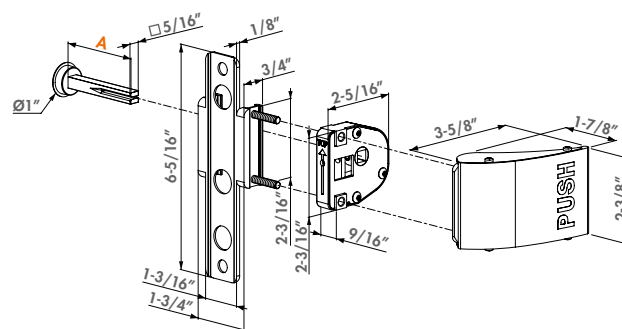

### Order code

Push-set in aluminum

**3006PUSH**

**A**

Follower length 2-3/8"



**NEW**

## Aluminum push bar for insert locks

PUSHBAR-H-

Panic bar for an easy opening and a free exit of a gate by a simple push. The aluminum PUSHBAR replaces the standard handle on the existing locks, operates the daybolt and can quickly be installed on new or existing Locinox hybrid insert locks. The PUSHBAR is available in a short version (45-1/4") and a long version for 4ft. gates (55-1/8") for gates up to 5 ft. The push bar can however be perfectly shortened to fit any gate.


**24h  
SHIPPING**

### Color options



### Specifications

- ✓ Black powder coated aluminum push bar with stainless steel mechanism
- ✓ Only compatible with H-Metal, H-Wood and Sixtylock
- ✓ Fast and easy installation with Quick-Fix
- ✓ For left and right turning gates
- ✓ Blinded 5/16" follower included
- ✓ Possible to combine with half handle sets with 5/16" follower
- ✓ Maximum gate width: 4 ft. for 45-1/4" version and 5 ft. for 55-1/8" version

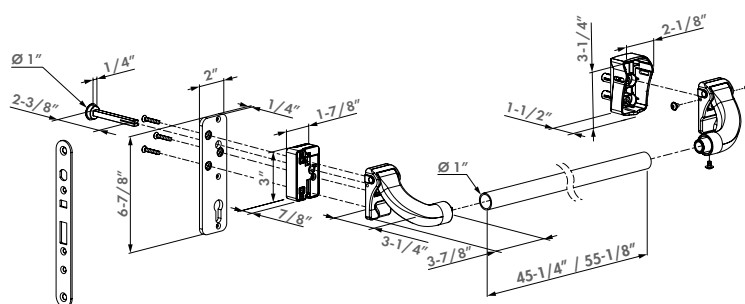

### Compatible locks



**H-METAL**  
P. 83



**H-WOOD**  
P. 89



**SIXTYLOCK**  
P. 82

### Order codes

**PUSHBAR-H-1150** Aluminum push bar for insert locks - Length 45-1/4"

**PUSHBAR-H-1400** Aluminum push bar for insert locks - Length 55-1/8"



**NEW**

## Push bar in aluminum for surface mounted gate locks

PUSHBAR-L-

**24h  
SHIPPING**


Panic Bar for an easy opening and a free exit of a gate by a simple push. The aluminum PUSHBAR replaces the standard handle, operates the daybolt and can quickly be installed on new or existing Locinox surface mounted gate locks (LA, LP and LF chassis). The PUSHBAR is available in a short version for 4 ft. gates (45-1/4") and a long version for 5 ft. gates (55-1/8"). The push bar can however be perfectly shortened to fit any gate.

### Color options

**9005**  
24h  
SHIPPING

### Specifications

- ✓ Black powder coated aluminum push bar with stainless steel mechanism
- ✓ For left and right turning gates
- ✓ Easy to install on the gate with Quick-Fix
- ✓ Blinded 5/16" follower included
- ✓ Possible to combine with half handle sets with 5/16" follower
- ✓ Maximum gate width: 4 ft. for 45-1/4" version and 5 ft. for 55-1/8" version

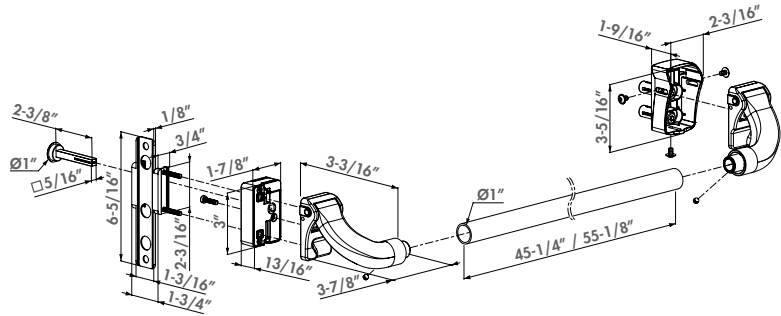

### Compatible locks



**LAKQ U2**  
P. 59

**LPKQ U2**  
P. 63

**LFKQ X1**  
P. 67

### Order codes

**PUSHBAR-L-1150** Aluminum push bar for surface mounted locks - Length 45-1/4"

**PUSHBAR-L-1400** Aluminum push bar for surface mounted locks - Length 55-1/8"


## Triangular spindle

3006T11



### Specifications

- ✓ Spindle in a triangular form of 7/16" to be used with triangle key
- ✓ Possible to insert in the handle opening of any LA lock



### Order codes

**3006T11**

27/64" triangular spindle



**LOCINOX**





**24h**  
**SHIPPING**

#### Specifications

- ✓ Handle pair in anodized aluminum
- ✓ Square 8 mm shaft (appx 5/16")

#### Order code


Aluminum handle pair

**3006C**

### Club handle pair in aluminum

3006C

Aluminum club-handle pair

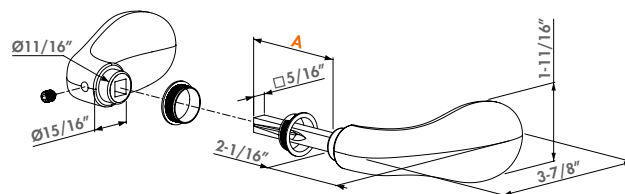

**A**

Follower length 2-3/8"



**24h**  
**SHIPPING**

#### Specifications

- ✓ Handle pair in anodized aluminum
- ✓ Square 8 mm shaft (appx 5/16")

#### Order codes

Aluminum handle pair


**3006M**

**3006M-H**

### Modern handle pair in anodized aluminum

3006M

Aluminum modern handle pair

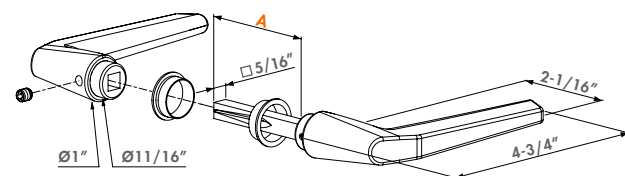

**A**

Follower length 2-3/8"

Follower length 4-3/4"



**24h**  
**SHIPPING**

#### Specifications

- ✓ Special design of the handle avoids bumping of the hand against the stop plate
- ✓ Square 8 mm shaft (appx 5/16")

#### Order codes

Aluminum handle pair


**3006J**

**3006J-H**

### Anodized aluminum handle pair

3006J

Aluminum handle pair

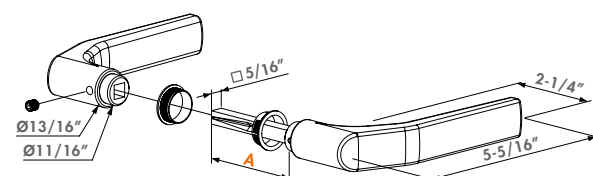

**A**

Follower length 2-9/16"

Follower length 4-3/4"



**24h**  
**SHIPPING**

#### Specifications

- ✓ Only applicable on Locinox sliding gate locks
- ✓ Square 10 mm shaft (appx 5/16")

#### Order codes

Reinforced aluminum handle pair


**3006S**

**3006S-H**

### Reinforced aluminum handle pair

3006S

Reinforced aluminum handle pair. Recommended as a standard for all sliding gate locks. Resistant against high forces during opening and closing of the gate.

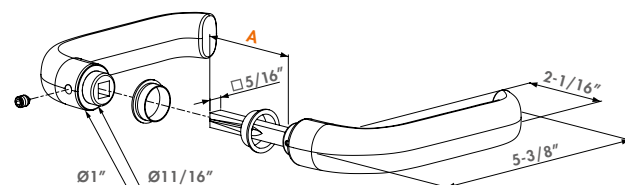

**A**

Follower length 2-3/8"

Follower length 4-3/4"



**24h  
SHIPPING**

#### Specifications

- ✓ Handle pair in powder coated zamac
- ✓ Square 8 mm shaft (appx 5/16")

#### Order code


Zamac handle pair

**3006FA**

### Ornamental handle pair in zamac

3006FA

Zamac ornamental handle pair

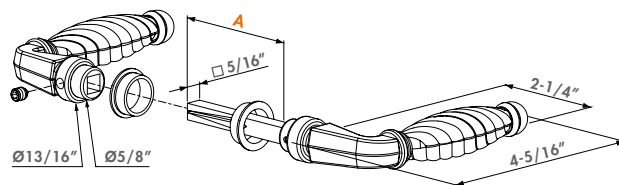

**A**

Follower length 2-9/16"



**24h  
SHIPPING**

#### Specifications

- ✓ Handle pair in anodized aluminum
- ✓ Square 8 mm shaft (appx 5/16")

#### Order codes


Aluminum handle pair

**3006D**

### Aluminum handle pair

3006D

Aluminum handle pair.

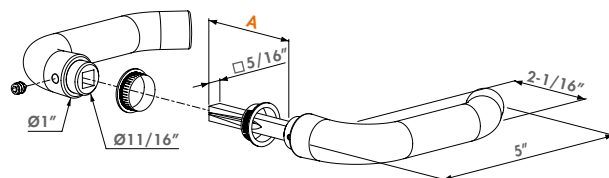

**A**

Follower length 2-3/8"



**24h  
SHIPPING**

#### Specifications

- ✓ Handle pair in stainless steel
- ✓ Square 8 mm shaft (appx 5/16")

#### Order codes

Stainless steel handle pair


**3006I**

**3006I-H**

### Stainless steel handle pair

3006I

Stainless steel handle pair

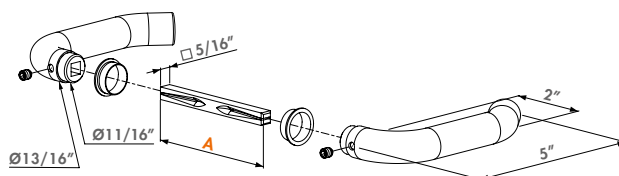

**A**

Follower length 3-9/16"

Follower length 4-3/4"



#### Specifications

- ✓ Square 8 mm shaft (appx 5/16")
- ✓ Special design of the handle avoids bumping of the hand against the stop plate

#### Order code


Polyamide handle pair

**3006G**

### Handle pair in polyamide

3006G

Handle pair in polyamide.

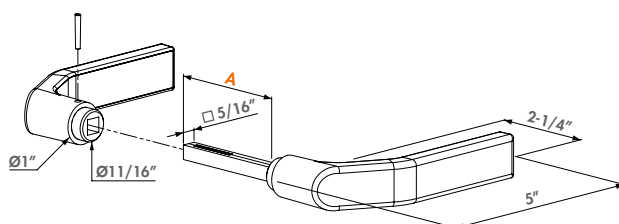

**A**

Follower length 2-5/8"



## Garden handle pair in polyamide

3006P

Polyamide handle pair


### Specifications

- ✓ Square 8 mm shaft (appx 5/16")
- ✓ Applicable with garden gate locks

### Order code

Polyamide handle pair

**3006P**

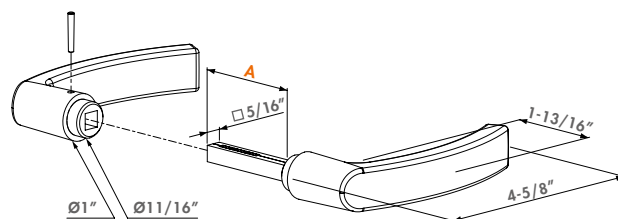

**A**

Follower length 2-1/8"



**24h  
SHIPPING**


### Specifications

- ✓ Round knobs in aluminum
- ✓ Square 8 mm shaft (appx 5/16")

### Order code

Aluminum handle pair

**3006R**

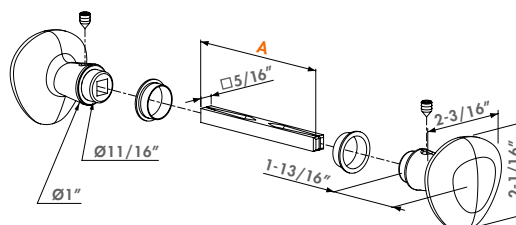

**A**

Follower length 3-9/16"







**24h  
SHIPPING**


## Half aluminum round handle

3006R-2

Half aluminum round handle. One side blinded.

### Specifications

- ✓ Round knob in aluminum
- ✓ Square 8 mm shaft (appx 5/16")

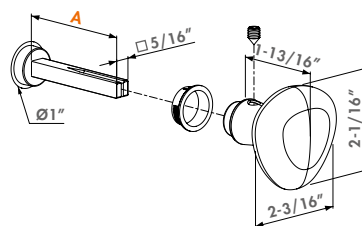

### Order code

Aluminum round knob

**3006R-2**

**A**

Follower length 2-3/8"




## Childproof security knob half handle

KIDLOC-2

Half handle anodized aluminum and polyamide security knob providing child safety. At least one button must be pressed while turning the knob. Impossible for children younger than 5 years, conform to swimming pool standard NF P90-306.

### Specifications

- ✓ Polyamide and aluminum
- ✓ For all locks with a 8 mm shaft (appx 5/16")
- ✓ Security knob for swimming pools, playgrounds, kennels,...
- ✓ Conforms to the European swimming pool standard NF P90-306



### Order code

Security knob

**KIDLOC-2**

**A**

Follower length 2-3/8"



## Adaptor plate for LA and LS locks

3019LA




**24h  
SHIPPING**

### Specifications

- ✓ Aluminum adaptor plate for LA- & LS locks
- ✓ Adaptor plate => Ø1-3/8" to 2-3/8"

Adaptor plate for gate frames for our Ornamental, Industrial, Electrical, Garden Gate, Swimming Pool, Mechanical Code, and Sliding Gate locks. The adaptor plate is mounted between the lock and gate frame.



### Compatible locks



LAKQ U2  
P. 59



LMKQ V2  
P. 66



LAKZ P1  
P. 72



LSKZ U2  
P. 78

### Order code

**3019LA** Adapter plate for round posts Ø1-1/2"

## Adaptor plate for SA keeps

3018LA




**24h  
SHIPPING**

### Specifications

- ✓ Polyamide adaptor plate for SA-keep
- ✓ Adaptor plate => Ø2-3/8"

The adaptor plate is mounted between the keep and post.



### Compatible keep



SAKL QF  
P. 95

### Order code

**3018LA** Adapter plate for round posts Ø2-9/16"

## Adaptor plate for SH keeps

6403




**24h  
SHIPPING**

### Specifications

- ✓ Aluminum adaptor plate for SH-keeps
- ✓ Adaptor plate => Ø2-3/8"

The adaptor plate is mounted between the keep and post.



### Compatible keep



SHKL QF  
P. 95

### Order code

**6403** Adapter plate for round posts Ø2-9/16"



## Chain link tension bar adapter


CLH-

This tension bar adaptor fits around our industrial, electrical, garden and sliding gate locks to give an aesthetic, finished look to chain link gates. There is a separate chain link tension bar adapter available for the mechanical code locks.


**24h  
SHIPPING**

### Specifications

- ✓ Hot-dip galvanized steel
- ✓ Install with 2 tension bands
- ✓ Ties in with the tension bar for a finished look

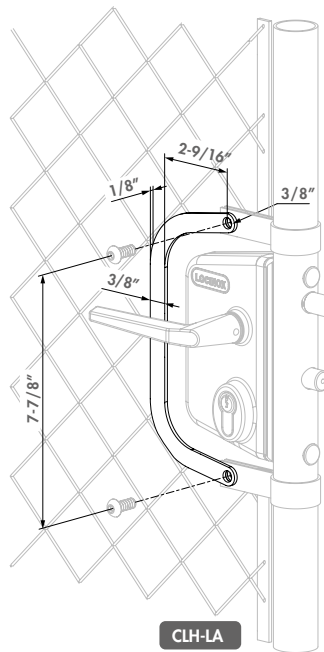

CLH-LA

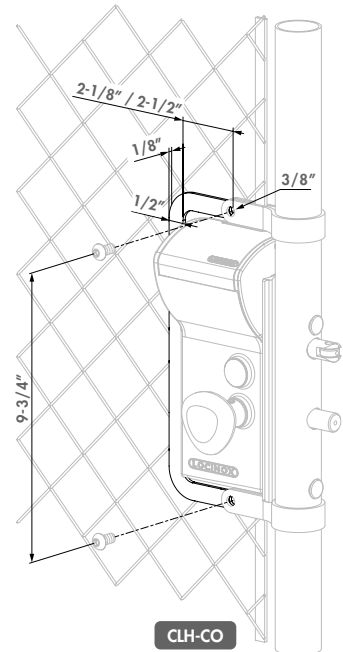

CLH-CO

### Order codes

CLH-LA

CLH-CO

Chain link tension bar adaptor for standard gate locks

Chain link tension bar adaptor for mechanical code locks







**24h  
SHIPPING**

#### Specifications

- ✓ Vandal-proof protection plate
- ✓ Powder coated aluminum housing
- ✓ Serves as a pick plate - use for extra security
- ✓ Shield can easily be mounted on the surface mounted lock and is available for gate frames of 1-1/2" to 2-1/2"
- ✓ Can be combined with keeps SA, and Modulec-SA


## Anti-theft protection plate for standard SA and Modulec SA keeps SHIELD-SA-

Vandal-proof protection plate in aluminum. This plate protects the latch bolt and the night bolt. Compatible with Locinox keeps (type SA and Modulec-SA).

#### Related products



SAKL QF  
P. 95

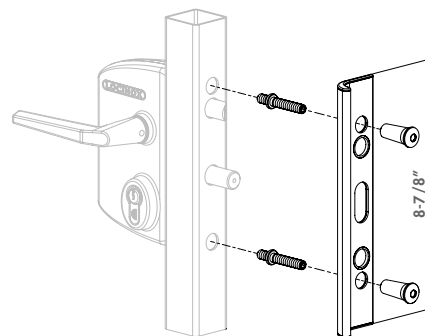

#### Order codes

**SHIELD-SA-** Adaptor plate for square to round posts for SA and MODULEC-SA keeps



**24h  
SHIPPING**

#### Specifications

- ✓ Vandal-proof protection plate
- ✓ Powder coated aluminum housing
- ✓ Provided with plastic sliding sleeves for a perfect pen guidance. Very convenient in combination with gate closers
- ✓ Shield can easily be mounted on the surface mounted lock and is available for gate frames of 1-1/2" to 2-1/2"
- ✓ Can be combined with keeps SH and Modulec-SH

## Anti-theft protection plate for security SH keeps and Modulec SH keeps SHIELD-SH-


SHIELD-SH-

Vandal-proof protection plate in aluminum. This plate protects the latch bolt and the night bolt. Compatible with Locinox keeps (type SH and Modulec-SH).

#### Related products



SHKL QF  
P. 95

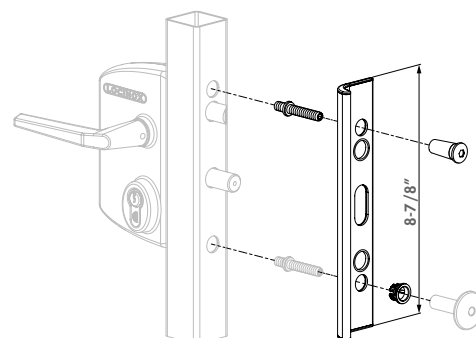

#### Order codes

**SHIELD-SH-** Adaptor plate for square to round posts for SH and MODULEC-SH keeps



**24h  
SHIPPING**

#### Specifications

- ✓ Aluminum adaptor plate for Modulec on round profiles
- ✓ Black anodized
- ✓ Separate versions for SA and SH available
- ✓ Is easily installed between strike and post

## Adaptor plate for Modulec strike 3018MOD-

3018MOD-

Adaptor plate for square to round posts for Modulec electric strike. The plate is mounted between strike and post. A perfect fit for round posts.


#### Recommended keeps



MODULEC-SA  
P. 29




MODULEC-SH  
P. 29

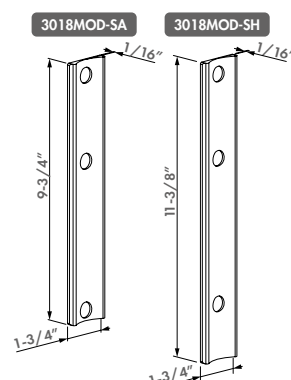

#### Order codes

**3018MOD-SA** Adaptor plate for square to round posts for MODULEC-SA electric strike **24h  
SHIPPING**

**3018MOD-SH** Adaptor plate for square to round posts for MODULEC-SH electric strike **24h  
SHIPPING**



**24h  
SHIPPING**


## Galvanized bracket to mount Samson-2 to chain link fence (USA only)

SB-

The chain link mounting bracket allows the Samson gate closer to easily adapt to gates with round profiles and round hinge posts. Brackets are galvanized steel with U-Bolts and stainless SD&T screws to lock the brackets into position. Available to fit 3" or 4" round posts and 1-5/8" or 1-7/8" gate frames.

### Specifications

- ✓ Compatible with Samson-2
- ✓ Galvanized steel mounting brackets accept standard QF-fasteners on Samson-2

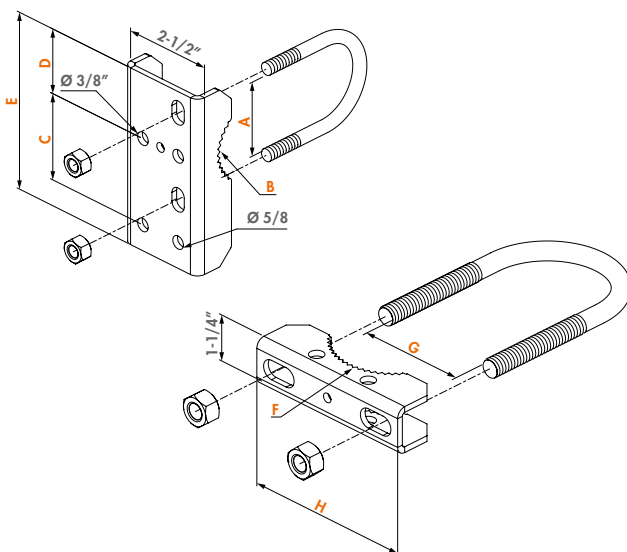

### Order codes

SB-3015

SB-3020

SB-4015

SB-4020

A	B	C	D	E	F	G	H
1-5/8"	1-5/8"	2-3/16"	1-9/16"	4-1/2"	3"	3"	4-3/4"
1-7/8"	1-7/8"	2-3/8"	1-3/4"	4-13/16"	3"	3"	4-3/4"
1-5/8"	1-5/8"	2-3/16"	1-9/16"	4-1/2"	4"	4"	5-7/8"
1-7/8"	1-7/8"	2-3/8"	1-3/4"	4-13/16"	4"	4"	5-7/8"



## NEW Chain link bracket for Tiger gate closer


CLB-TIGER



**24h  
SHIPPING**

### Specifications

- ✓ Aluminum anodized assembly brackets for Tiger on chain link fences
- ✓ Diameter post: 1-7/8" to 4"
- ✓ Diameter gate profile: 1-3/8" to 1-7/8"
- ✓ All fixations included
- ✓ Drilling jig included for easy installation

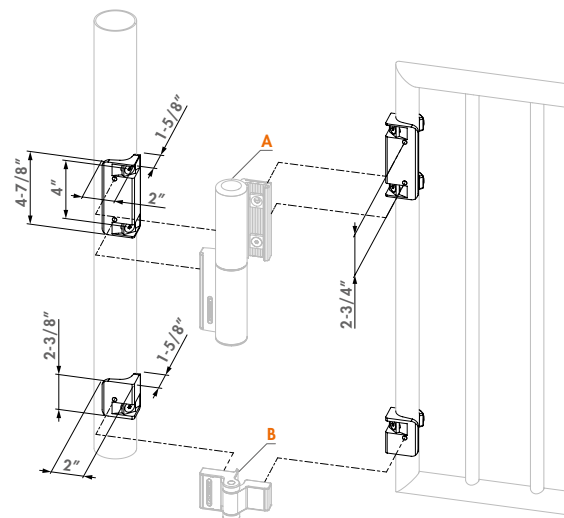

### Order code

CLB-TIGER

**A B**

Tiger Puma

## NEW Chain link bracket for Mammoth gate closer


CLB-MAMMOTH



**24h  
SHIPPING**

### Specifications

- ✓ Aluminum anodized assembly brackets for Mammoth on chain link fences
- ✓ Diameter post: 1-7/8" to 4"
- ✓ Diameter gate profile: 1-3/8" to 1-7/8"
- ✓ All fixations included
- ✓ Drilling jig included for easy installation

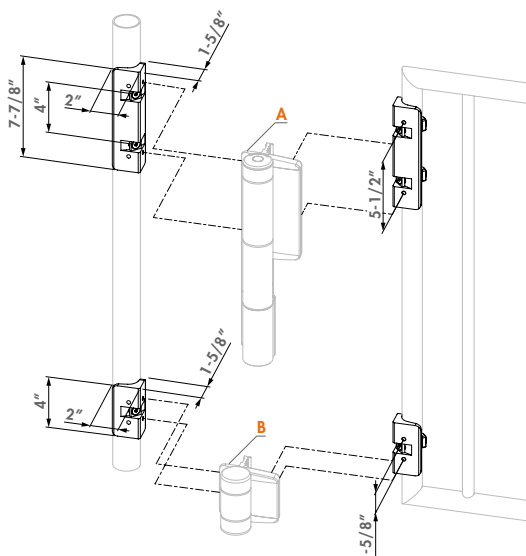

### Order code

CLB-MAMMOTH

**A B**

Mammoth-180 Dino





## Triangular cylinder set for triangle keys

3012-POC-

Stainless steel symmetric Europrofile cylinder set with which you can equip each Locinox lock with a triangular key access control on cylinder level. Available for the 7/16", 9/16" or 11/16" triangle key. Applications: waste management, access fire brigade, parking facilities,...

### Specifications

- ✓ Stainless steel triangular cylinder set
- ✓ Quick and easy retro-fitting assembly
- ✓ Universal compatibility for 7/16", 9/16" or 11/16" triangle keys
- ✓ Can replace every 2-1/8" - 2-3/8" Europrofile cylinder

### Compatible triangle keys



**3071-T11**  
P. 176




**3071-T14**  
P. 176


### Order codes

Triangle width	A	B	C
<b>3012-POC-T11</b>	11 mm ( 7/16")		3071-T11
<b>3012-POC-T14</b>	14 mm ( 9/16")		3071-T14
<b>3012-POC-T17</b>		17 mm ( 11/16")	

**T11 | T14**

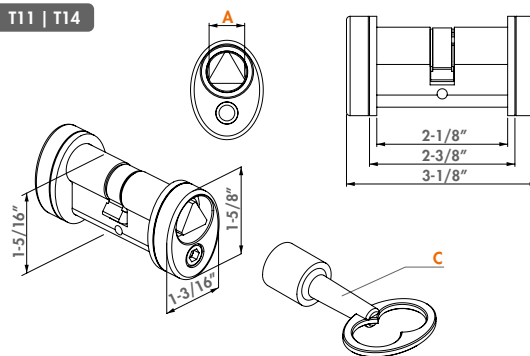

**T17**

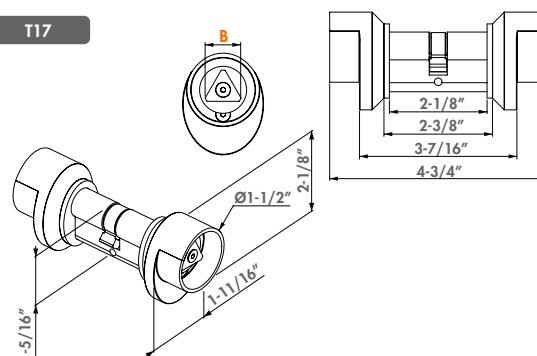

## 46 mm cylinder (1-13/16" L)

3012-46-STD

Europrofile cylinder with three keys: 46mm (1-13/16"), keyed alike or keyed to differ.


**24h  
SHIPPING**

### Specifications

- ✓ 46 mm (1-13/16") Europrofile cylinder with three keys
- ✓ VCA: keyed different
- ✓ GCA: keyed alike A
- ✓ GCB: keyed alike B
- ✓ GCC: keyed alike C
- ✓ GCD: keyed alike D

### Order codes

<b>3012-46-STD-VCA</b>	Symmetric 29/32" - 29/32" cylinder, keyed to differ
<b>3012-46-STD-GCA</b>	Symmetric 29/32" - 29/32" cylinder, keyed alike A
<b>3012-46-STD-GCB</b>	Symmetric 29/32" - 29/32" cylinder, keyed alike B
<b>3012-46-STD-GCC</b>	Symmetric 29/32" - 29/32" cylinder, keyed alike C
<b>3012-46-STD-GCD</b>	Symmetric 29/32" - 29/32" cylinder, keyed alike D

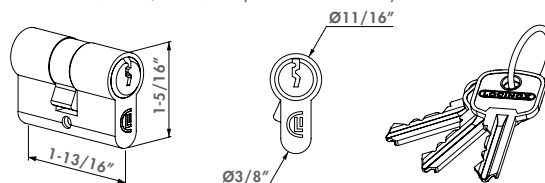

## 54 mm cylinder (2-1/8" L)

3012-54-STD

Europrofile cylinder with three keys: 54mm (2-1/8"), keyed alike or keyed to differ.


**24h  
SHIPPING**

### Specifications

- ✓ 54 mm (2-1/8") Europrofile cylinder with three keys
- ✓ VSZ: keyed different
- ✓ GSZ: keyed alike Z
- ✓ GSY: keyed alike Y
- ✓ GSX: keyed alike X
- ✓ GSZ: Cylinders in different lengths are not compatible with each other

### Order codes

<b>3012-54-STD-VSZ</b>	Symmetric 1-1/16" - 1-1/16" cylinder, keyed to differ
<b>3012-54-STD-GSZ</b>	Symmetric 1-1/16" - 1-1/16" cylinder, keyed alike Z
<b>3012-54-STD-GSY</b>	Symmetric 1-1/16" - 1-1/16" cylinder, keyed alike Y
<b>3012-54-STD-GSX</b>	Symmetric 1-1/16" - 1-1/16" cylinder, keyed alike X

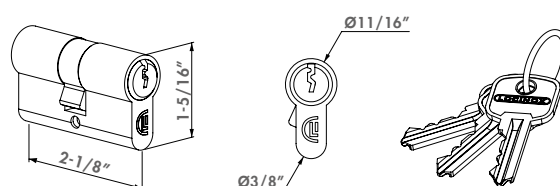

## 60 mm cylinder (2-3/8" L)

3012-60-STD

Europrofile cylinder with three keys: 60mm (2-3/8"), keyed alike or keyed to differ.


**24h  
SHIPPING**

### Specifications

- ✓ 60 mm (2-3/8") Europrofile cylinder with three keys
- ✓ GSZ: Cylinders in different lengths are not compatible with each other

### Order codes

<b>3012-60-STD-GSZ</b>	Symmetric 1-1/4" - 1-1/4" cylinder, keyed alike
<b>3012-60-STD-VSZ</b>	Symmetric 1-1/4" - 1-1/4" cylinder, keyed to differ

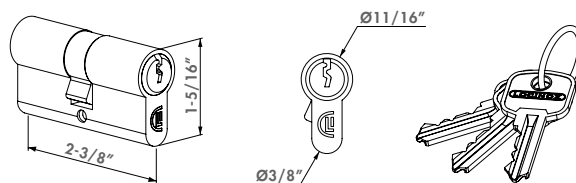

## 80 mm cylinder (3-1/8" L)

3012-80-STD

Europrofile cylinder with three keys: 80 mm (3-1/8"), keyed alike or keyed to differ.


**24h  
SHIPPING**

### Specifications

- ✓ 80 mm (3-1/8") Europrofile cylinder with three keys
- ✓ GSZ: Cylinders in different lengths are not compatible with each other

### Order codes

<b>3012-80-STD-GSZ</b>	Symmetric 1-1/2" - 1-1/2" cylinder, keyed alike
<b>3012-80-STD-VSZ</b>	Symmetric 1-1/2" - 1-1/2" cylinder, keyed to differ

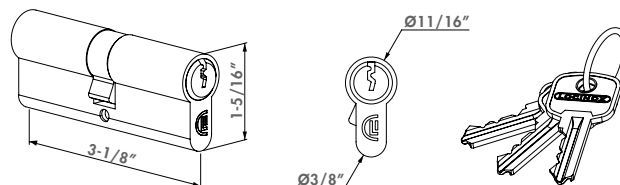



**24h  
SHIPPING**


#### Specifications

- ✓ 37 mm (1-7/16) half cylinder with three keys
- ✓ One side key / one side blind
- ✓ Used with Keydrop, Electradrop and Keysafe
- ✓ GSZ: Cylinders in different lengths are not compatible with each other

### 37 mm half cylinder (1-7/16" L)

3012-37-STD

Half Europrofile cylinder 37mm (1-7/16"). Same keys as GSZ-cylinders. Used for Keydrop, Keysafe and Electradrop.

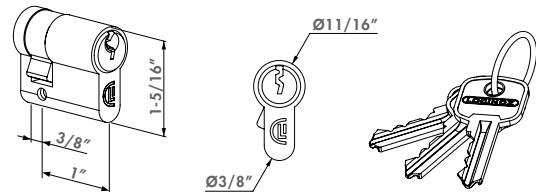

#### Order code

**3012-37-STD-GSZ** Asymmetric 3/8" - 1-1/16" cylinder, keyed alike Z



**24h  
SHIPPING**


#### Specifications

- ✓ Dummy cylinder disables dead bolt locking
- ✓ For panic gates in combination with the 3006PUSH and PUSHBAR

### 54 mm dummy cylinder (2-1/8" L)

3012-54-DSA

Dummy cylinder Europrofile 54mm (2-1/8"). Prevents the lock from being locked by disabling the dead bolt.

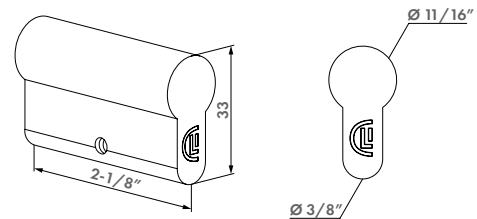

#### Order code

**3012-54-DSA** Europrofile dummy cylinder 2-1/8"



**24h  
SHIPPING**


#### Specifications

- ✓ Blank key for cylinder 1-13/16"
- ✓ For reproducing cylinders keys for 3012-46-STD

### Blank key 1-13/16"

3070-46

Key blank that allows you to reproduce copies



#### Order code

**3070-46** Blank key for reproducing 2-1/8" cylinders



**24h  
SHIPPING**


#### Specifications

- ✓ Blank key for cylinder 2-1/8"
- ✓ For reproducing cylinder keys for 3012-37-STD, 3012-54-STD

### Blank key 2-1/8"

3070-54

Key blank that allows you to reproduce copies



#### Order code

**3070-54** Blank key for reproducing 1-13/16" cylinders






## 60 mm cylinder (2-3/8" L)

3012-60-KNOB

Europrofile cylinder with three keys and knob-turn on one side (single cylinder). Used when a free exit is required on one side.

### Specifications

- ✓ 60 mm (2-3/8") Europrofile cylinder with three keys
- ✓ One side key / one side knob
- ✓ Free entrance on one side

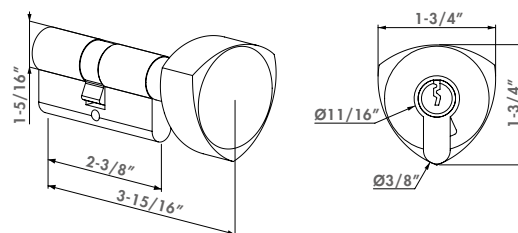

### Order codes

**3012-60-KNOB-GSZ** Symmetric 1-1/4" - 1-1/4" knob cylinder, keyed alike

**3012-60-KNOB-VSZ** Symmetric 1-1/4" - 1-1/4" knob cylinder, keyed to differ




## Mortise cylinders set

MRT-118

Set with 2x Mortise cylinders and 4 keys. Fits our new LUKY lock. Cylinders available in keyed alike and keyed to differ.

### Specifications

- ✓ Length 1" 1/8"
- ✓ Adams Rite cam type 863A
- ✓ 5 Pins code (6 pins drilled – rekeyable)
- ✓ Satin Nickle Plated
- ✓ 1,150" x 32 UNS thread size
- ✓ 1,360" face diameter

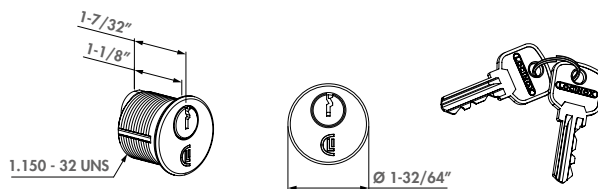

### Order codes

**MRT-118-GMA** Cylinder keyed alike **24h SHIPPING**

**MRT-118-VMZ** Cylinder keyed to differ **24h SHIPPING**




## Triangle Key

3071-

Compatible with a lock that is equipped with an 7/16" or 9/16" triangle instead of a handle.

### Specifications

- ✓ Compatible with 3012-POC-T11 / 3012-POC-T14 / 3006T11
- ✓ Zinc-plated

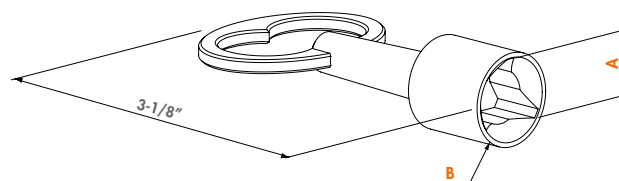

### Order codes

Triangle width

**3071-T11**

**3071-T14**

**A** **B**

11 mm (7/16") Ø5/8"

14 mm (9/16") Ø7/8"





**24h  
SHIPPING**


## Gate stop with rubber bumper

### GATESTOP

Aluminum gate stop. The rubber stop prevents the gate from being damaged. Height adjustable from 2-1/2" to 5-1/2". Can also be used as a wall stop. Includes anchor bolt.

#### Specifications

- ✓ Fast and easy installation
- ✓ Height adjustable: min 2-3/8" to 5-1/2" max
- ✓ Aluminum body with rubber stop
- ✓ Included anchor bolt M12 for concrete mounting

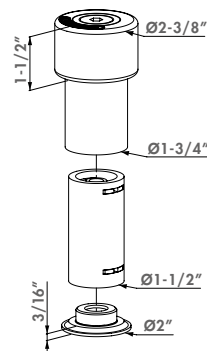

#### Order code

GATESTOP

Including anchor bolt




## Keysafe tube mount with Quick-Fix

### KEYSAFE QF

Stainless steel Keysafe. Supplied with Quick-Fix to mount inside metal profiles. Used for a safe storage of your spare gate lock keys.

#### Specifications

- ✓ Keysafe with europrofile cylinder
- ✓ For safe storage of your gate lock keys
- ✓ Rust-resistant front cover
- ✓ Stainless steel cylinder cover
- ✓ Aluminum housing
- ✓ Fast and easy fixation with Quick-Fix

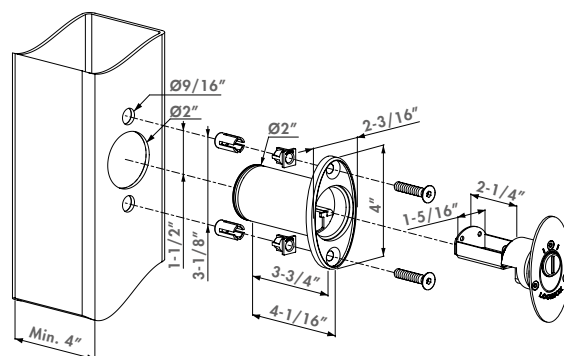

#### Order code

KEYSAFE QF

Including 3012-37-STD-GSZ




## Security "break-off" nuts

### SECUNUT

Stainless steel anti-theft nuts for security applications.

#### Specifications

- ✓ Stainless steel security nuts for anti-theft applications
- ✓ Available in M6, M8 and M10



#### Order codes

SECUNUT-M6

SECUNUT-M8

SECUNUT-M10

A	B	C	D
M6	3/8"	3/8"	Ø3/8"
M8	1/2"	7/16"	Ø1/2"
M10	11/16"	9/16"	Ø5/8"




## Fixing for 2D-welded mesh with self-drilling screws

2D-PANELFIX SD

### Specifications

- ✓ Bracket for 2D-welded meshes
- ✓ With self-drilling screws

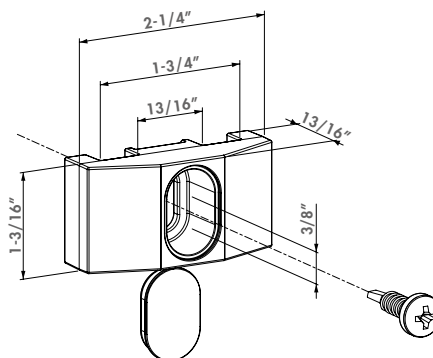

### Order code

2D-PANELFIX SD

With self-drilling screws




## Fixing for 3D-welded mesh with self-drilling screws

3D-PANELFIX SD

### Specifications

- ✓ Bracket for 3D-welded meshes
- ✓ With self-drilling screws

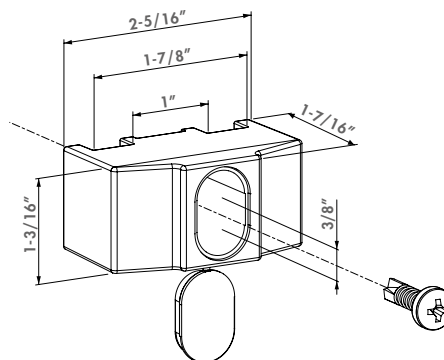

### Order code

3D-PANELFIX SD

With self-drilling screws







## Post plug

TC

Polypropylene post plugs.

### Color options

6005 9005

### Specifications

- ✓ Polypropylene post plug for square profiles

### Gateframe compatibility

For square profiles

For rectangular profiles



TC-4040

TC-5050

TC-6060

TC-4060

A	B	C	D
1-1/2"	3/16"	3/4"	
2"	3/16"	3/4"	
2-3/8"	3/16"	3/4"	
1-1/2"	2-3/8"	3/16"	3/4"



## Post caps

TCR

Polypropylene post caps.

### Color options

6005 9005

### Specifications

- ✓ Polypropylene post cap for round profiles

### Gateframe compatibility


For round profiles

TCR-42

TCR-48

TCR-60

A	B
Ø1-3/4"	1-3/16"
Ø2"	1-3/16"
Ø2-1/2"	1-1/2"



## Square post cap

TCO-STD

Polypropylene post cap. Protects the upper borders of the posts.

### Color options

9005

### Specifications

- ✓ Polypropylene square post cap for 2-3/8"x2-3/8", 3-1/8"x3-1/8" and 3-15/16"x3-15/16"
- ✓ Protects upper borders of posts

### Order codes


For square profiles

TCO-STD-6060

TCO-STD-8080

TCO-STD-100100

A	B
1-5/8"	2-11/16"
1-5/8"	3-1/2"
1-7/8"	4-5/16"

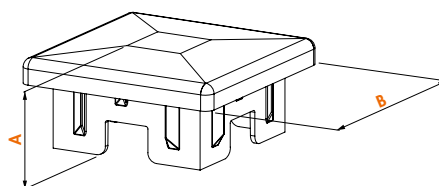



## Post cap to screw on

TCO-SCR

Hot-dip galvanized post caps with screw hole. Perfect to protect / finish your posts. Applications: wood, aluminum or metal.


### Specifications

- ✓ Hot-dip galvanized post caps to screw on

### Order codes

For square profiles

	A	B
<b>TCO-SCR-HDG-4040</b>	1-11/16"	7/8"
<b>TCO-SCR-HDG-5050</b>	2-1/16"	15/16"
<b>TCO-SCR-HDG-6060</b>	2-1/2"	15/16"
<b>TCO-SCR-HDG-8080</b>	3-1/4"	1"
<b>TCO-SCR-HDG-100100</b>	4-1/16"	1-1/16"
<b>TCO-SCR-HDG-120120</b>	4-13/16"	1-1/8"

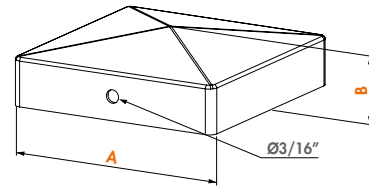

## Post caps to weld on

TCO-WLD

Zinc-plated post caps to weld on. Perfect to protect / finish your posts. Applications: metal.

### Specifications


- ✓ Zinc plated post caps to weld on

### Order codes

Black steel post caps

Zinc-plated post caps

		A	B
<b>TCO-WLD-B-4040</b>	<b>TCO-WLD-Z-4040</b>	1-11/16"	1/2"
<b>TCO-WLD-B-5050</b>	<b>TCO-WLD-Z-5050</b>	2-1/8"	1/2"
<b>TCO-WLD-B-6060</b>	<b>TCO-WLD-Z-6060</b>	2-1/2"	9/16"
<b>TCO-WLD-B-8080</b>	<b>TCO-WLD-Z-8080</b>	3-5/16"	5/8"
<b>TCO-WLD-B-100100</b>	<b>TCO-WLD-Z-100100</b>	4-1/16"	11/16"
<b>TCO-WLD-B-120120</b>	<b>TCO-WLD-Z-120120</b>	4-7/8"	3/4"

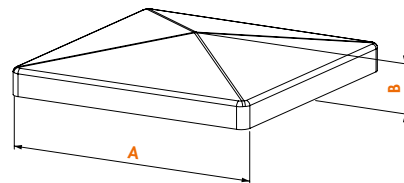



## Security strip - weld on


PKWB2000

Security strips in black steel to weld on. Packed per 20 pieces of 78-3/4" length.

**24h**  
SHIPPING

### Specifications

- ✓ Black steel for welding
- ✓ Mounting: weld on
- ✓ Profile: 1-5/16" x 1/8" thick
- ✓ Length: 78-3/4"
- ✓ Packed in tubes of 20 pcs 78-3/4" long

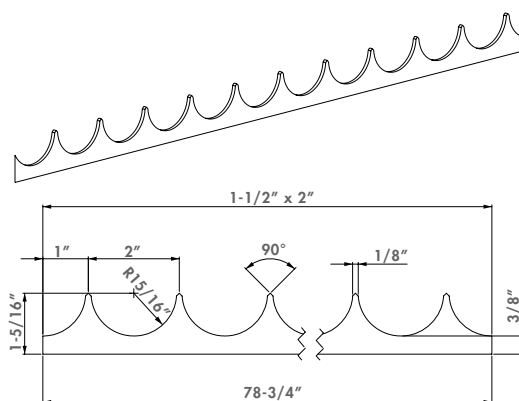

### Order code

PKWB2000

Security strip to weld on



## Security strip to screw on


PKSG2000

Hot-dip galvanized L-security strips to screw on. Packed per 10 pieces of 78-3/4"

**24h**  
SHIPPING

### Specifications

- ✓ Hot-dip galvanized toothed L-profile
- ✓ Mounting: screw on
- ✓ Profile: 1-7/16" x 1" x 1/8" thick
- ✓ Length: 78-3/4"
- ✓ Easy to retrofit
- ✓ Packed in tubes of 10 pcs 78-3/4" long

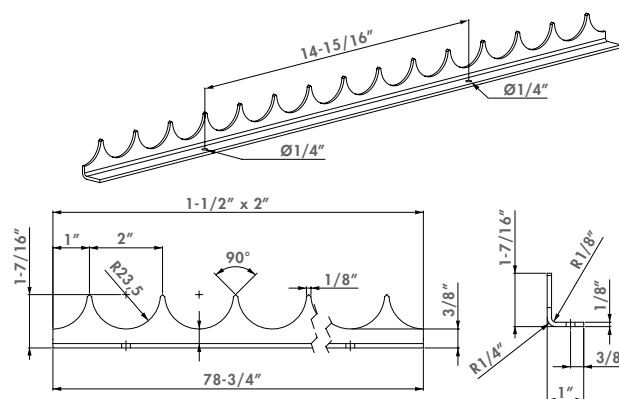

### Order code

PKSG2000

Security strip to screw on




## Electrogalvanized security strips to weld on

PKWB2000-EP

Electrogalvanized security strips to weld on. Packed per 20 pieces of 78-3/4"

### Specifications

- ✓ Mounting: weld on
- ✓ Profile: 1-5/16" x 1/8" thick
- ✓ Length: 78-3/4"
- ✓ Packed in tubes of 20 pcs 78-3/4" long

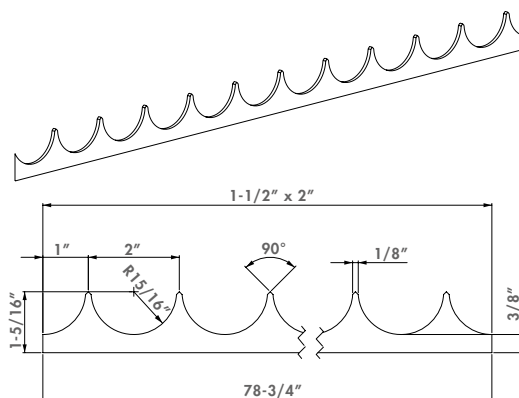

### Order code

PKWB2000-EP

Security strip to weld on





## TIGER

THE NEW STANDARD FOR  
SECURITY AND PROTECTION



### TIMELESS

Easy and fast installation with  
the patented 'click fit'.

### TEMPERATURE PROOF

Works consistently in all  
weather conditions.



### 300 SPINS & FINAL SNAP

Both can easily be adjusted to  
your liking with an Allen Key.

### RELIABLE MOVEMENTS

Based on a movement of  
200,000 movements.



3 YEAR  
WARRANTY

LOCKING



# Sales support tools

---

Convince your clients of the Locinox quality. We developed several gate displays and democases of our best selling products. Every featured Locinox product is full-scale and functioning just like in real-life.

These handy sales support tools perfectly claim what Locinox is standing for: exceptional quality, good value, extreme durability, user friendly comfort, easy installation, and much more. Let the lightweight gate displays and complete democases be your closest ally during sales visits or showcase them in your showroom. They will be an eyecatcher and make your sales talks much easier, believe us.

---



184 Democases

185 Gate displays





## NEW Democase with a range of Locinox hinges

### DEMO-HINGES

Sturdy, high quality and handy demo case with a range of weatherproof hinges.

#### Specifications

- ✓ Includes following hinges: GBM12-DP, SWING40, G90LR, GBMU4D20, BOLTON4D, 1DBH, 3DM and PUMA
- ✓ Includes following U-shaped ear plates: 1001, 1036 and 1041
- ✓ Includes 1034-A2 eyebolt set
- ✓ Includes 1034ROLL-HDG eyebolt
- ✓ Includes GRIP fixation grip

#### Order code

**DEMO-HINGES** Democase with a range of Locinox hinges



## NEW Democase with a range of Locinox locks and SlimStone keypad

### DEMO-LOCKS

Sturdy, high quality and handy demo case with a range of weatherproof locks and the SlimStone keypad.

#### Specifications

- ✓ Includes following gate locks: LAKQ U2, LPKQ U2 en LFKQ X1
- ✓ Includes following keeps: Modulec SH, SAKL en SHKL
- ✓ Includes the SlimStone keypad
- ✓ Miscellaneous: PB-1, DC-POWER-12V/20W, GATESWITCH

#### Order code

**DEMO-LOCKS** Democase with a range of Locinox locks and SlimStone keypad



## NEW Democase with a range of Locinox handles and drop bolts

### DEMO-DROPBOLTS

Sturdy, high quality and handy demo case with a range of handles and drop bolts.

#### Specifications

- ✓ Includes following handles: 3006D, 3006M, 3006FA, 3006J, 3006P, 3006G, 3006KR, PUSH, KIDLOC-2 and 3012-POC-T11 (+14, 17)
- ✓ Includes EGS ground catcher
- ✓ Includes VSF and Keydrop drop bolts
- ✓ Includes LAKQ U2 gate lock

#### Order code

**DEMO-DROPBOLTS** Democase with a range of Locinox handles and drop bolts





## NEW Access control gate display with Modulec strike, SlimStone keypad and Tiger gate closer

PS\_SLIMSTONE-TIGER

Access control gate display with SlimStone keypad (IP 68), Modulec electric strike and the hydraulic Tiger gate closer.

### Specifications

- ✓ High quality and lightweight aluminum display
- ✓ Information panel in 4 languages

### Order code

**PS\_SLIMSTONE-TIGER** Access control gate display with Modulec strike, SlimStone keypad and Tiger gate closer



## NEW Gate display Tiger gate closer and industrial lock

PS\_TIGER-


Aluminum gate display featuring the Tiger hydraulic gate closer with the industrial lock and stainless steel keep.

### Specifications

- ✓ High quality and lightweight aluminum display
- ✓ Information panel in 4 languages

### Order code

**PS\_TIGER-** Gate display Tiger gate closer and industrial lock



## NEW Gate display with Rhino gate closer, industrial lock and Bolton4D hinge

PS\_RHINO-

Aluminum gate display featuring the Rhino hydraulic gate closer with the bolttable 180° Bolton4D hinge, an industrial lock and a stainless steel keep.

### Specifications

- ✓ High quality and lightweight aluminum display
- ✓ Information panel in 4 languages

### Order code

**PS\_RHINO-** Gate display with Rhino gate closer, industrial lock and Bolton4D hinge



## NEW Gate display with Lion gate closer, industrial lock and 90° hinge

### PS\_LION-

Aluminum gate display featuring the Lion hydraulic gate closer with a hot-dip galvanized 90° hinge, an industrial lock and a stainless steel keep.

#### Specifications

- ✓ High quality and lightweight aluminum display
- ✓ Information panel in 4 languages

#### Order code

**PS\_LION-** Gate display with Lion gate closer, industrial lock and 90° hinge



**24h  
SHIPPING**

## Radio with AUX jack

### RADIO

Portable rechargeable site radio. Shock- and waterproof. A nice gadget for your fencing installers.

#### Specifications

- ✓ Shock- and waterproof
- ✓ Power: 10 Watt
- ✓ AUX-jack
- ✓ Chargeable batteries included

#### Order code

**RADIO** Portable site radio with chargeable batteries included



# #WE ARE LOCINOX



## FORWARD

Innovation as the  
engine of your growth



## MODULARITY

Designed with flexibility  
at every moment



## ADDED VALUE

High quality to ensure  
your peace of mind



## 24/7 WEBSHOP

Order when  
it suits you



## FULL SERVICE

Exceptional  
after-sales service



## 3 YEAR WARRANTY

Sustainable solutions  
in the very long term



## TRANSPARENCY

A sincere and clear  
communication, day after day



## RELIABLE

Our promises and deadlines  
are always met



## LOYAL

Long-term relationships and a  
win-win situation for everyone

[WWW.LOCINOXUSA.COM](http://WWW.LOCINOXUSA.COM)







## Notes

# Table of contents

1DBH-	127	3970USA	150
2D-PANELFIX SD	178	3970LS	150
3DM	127	6403	168
3D-PANELFIX SD	178	ABK	146
3DW	128	ABL	146
4DFIX-I	117	AC-TRANS-12V-25W	45
4DFIX-I-12	117	BEARING HINGE	126
4DW	128	B-MAG-	31
1001 U	116	BOLTON4D-	109
1002B	123	BOLTON-G-	110
1002M	116	BOLTON-U-	110
1004ORNA	123	CGS	142
1005WP	124	CLB-MAMMOTH	172
1005WPF	124	CLB-TIGER	172
1005WPU16	124	DC-ACCESS-12V-20W	46
1034A2-	115	DC-POWER-12V-20W	46
1034HDGA-	114	DC-POWER-24V-25W	46
1034ROLL-HDG-	115	DEMO-DROPBOLTS	184
1036	121	DEMO-HINGES	184
1039SET	121	DEMO-LOCKS	184
1040HDSM16-	134	DINO	126
1040TPS-M12-	134	DRILL-FIX	151
1041-01	133	DRILLØ15	150
1127	121	DRILLVISE-II	155
2005	45	DRILLVISE-IV	155
3006C	164	DURA	133
3006D	165	DVK	44
3006FA	165	DVK-HD	45
3006G	165	EGS	143
3006I	165	ELECTRADROP	42
3006J	164	FIFTYLOCK	81
3006KR	161	FORTYLOCK	80
3006M	164	G90LR	119
3006P	166	G90WP	120
3006PC	94	G90Z	119
3006PULL	161	GAM12	133
3006PUSH	162	GATESTOP	177
3006R	166	GATESWITCH	47
3006R-2	167	GBM12	131
3006S	164	GBM12-DP	131
3006T11	163	GBM16	132
3012-37-STD	175	GBM16-DP	132
3012-46-STD	174	GBMU4D12	112
3012-54-DSA	175	GBMU4D16	112
3012-54-STD	174	GBMU4D20	113
3012-60-KNOB	176	GBMU4DSHIELD	113
3012-60-STD	174	GBMU	114
3012-80-STD	174	GDP	125
3012-POC-	173	G-ORNA-LR	122
3018LA	168	G-ORNA-WP	122
3018MOD-	170	GP-U-BASE	125
3019LA	168	GRIP12	118
3020-HYB	86	GRIP16	118
3070-46	175	GRIP20	118
3070-54	175	H-COMPACT	87
3071-	176	HKT	102




HLT	85	QF-EXP	156
H-METAL	83	QUICK-FIX	156
H-METAL-WB	84	RADIO	186
HWKB	102	RHINODRILL	153
HWLB	85	RHINO	19
H-WOOD	89	ROLLTOP	157
IGC	147	SAKL QF	95
KEYDROP	140	SAMSON-2	17
KEYSAFE QF	177	SB-	171
KIDLOC-2	167	SECUNUT	177
KIDLOC	161	SEH	28
KLAUW-	117	SE	28
KLAUW12	116	SFKB	104
LAKQ H2	71	SFKI	104
LAKQ U2	59	SFKM	105
LAKQ U3	60	SFKP	105
LAKY F2	70	SHIELD-SA-	170
LAKZ P1	72	SHIELD-SH-	170
LAKZ P1 WSI	73	SHKC	103
LDKZ D1	65	SHKL QF	95
LEKQ U4	68	SHKM	101
LFKQ X1	67	SHKW	103
LGKZ D1	79	SIXTYLOCK	82
LIKQ U2	69	SKRZ	96
LION	18	SLIMSTONE-	26
LION-VTC-DRILL	154	SLIMSTONE-2-	27
LLKZ V2	76	S-MAG-	36
LMKQ V2	66	SMKL QF	96
LOCITool LA	157	SPKZ QF	97
LOCITool LB	157	SPKZ-TK	97
LPKQ U2	63	SSKZ QF	98
LR	123	STK QF	99
LSKZ U2	78	STR60 QF	99
LUKY J5	61	SUBY	138
MAG	38	SWING40	130
MAGMAG	39	TC	179
MAGUNIT-2500	32	TCO-SCR	180
MAMMOTH-180	15	TCO-STD	179
MODULEC-SA	29	TCO-WLD	180
MODULEC-SH	29	TCR	179
MRT-118	176	TIGERDRILL	152
N-LINE-B-MAG-	33	TIGER	14
N-LINE-B-MAG-KIT-	34	TRICONE	43
N-LINE MAG	40	TT-BM3S	53
N-LINE MAG KIT-2500	41	TT-BSP / TT-SSP	53
N-LINE-S-MAG-	33	TT-CL1	55
OGS	142	TT-DM3	53
O-SET	98	TT-FC31	54
PB-1	44	TT-FO31	54
PKSG2000	181	TT-MM3S	54
PKWB2000	181	TT-PIVOT	55
PKWB2000-EP	181	TT-SAH	55
PS_LION-	186	TURNITEC	52
PS_RHINO-	185	TWIST40	74
PS_SLIMSTONE-TIGER	185	UGC	147
PS_TIGER-	185	VERTICLOSE-2-	21
PUMA	130	VERTICLOSE-2-WALL-	22
PUSHBAR-H-	162	VSA / VSF	141
PUSHBAR-L-	163		

LOCK


**L**

CHASSIS


**A/P**




**E/I**




**M**



**D**



**F**




PROFILE


**K**



**R**




**P**




ADJUSTABILITY

**Y**




+ 3/4"

**Q**



+ 3/4"

**Z**



No adjustability

DIMENSIONS

**1010**

- 3/8"
- Not for LE

**2323**

- 29/32"
- Not for LE

**3030**

- 1-1/4"

**4040**

- 1-1/2"

**5050**

- 2"
- Only for Y, Z-mechanism

**6060**

- 2-1/2"

**8080**

- 3"

**100100**

- 4"

LOCKBOX

**U2L**



- Industrial lockbox
- 2-1/8" cylinder
- For Q -mechanism

**U3L**




- Industrial lockbox
- Ø 7/8" KABA-KESO cylinder
- For Q -mechanism

**V2L**




- Code lockbox
- 2-1/8" cylinder
- For M, L -mechanism

**X1L**




- Code lockbox
- For F -mechanism

**F2L**




- Small ornamental lockbox
- 1-3/4" cylinder
- For Y -mechanism

**H2L**



- Large ornamental lockbox
- 2-1/8" cylinder
- For Q -mechanism

**P1L**



- Polyamide lockbox
- 1-3/4" cylinder
- For Z -mechanism

**D1L**



- Double cylinder lockbox
- 2-1/8" cylinder
- Special Z -mechanism

**J5L**



- Industrial USA lockbox
- Mortise cylinder
- For Y -mechanism

COLOURS

**ALUM**



NO COATING

**6005**



MOSS GREEN

**6009**



FIR GREEN

**9005**



JET BLACK

**9010**



PURE WHITE

**7016**



ANTHRACITE

**7040**



WINDOW GREY

**ZILV**



SILVER

CYLINDERS

**VSZ**

Keyed to differ

**GSZ**

Keyed alike Z

**GSY**

Keyed alike Y

**GSX**

Keyed alike X

**DSA**

Dummy cylinder

**VCA**

Keyed to differ

**GCA**

Keyed alike A

**GCB**

Keyed alike B

**GCC**

Keyed alike C

**GCD**

Keyed alike D

**T14**

For 14 mm triangle keys

**ZCZ**

No cylinder keys


2-1/8"

1-3/4"

2-1/8" - 2-1/2"


HANDLES

**M**



Aluminum

**D**



Aluminum

**R**



Aluminum round

**I**




Stainless steel

**J**



Aluminum

**FA**



Ornamental zamac - black

**P**



Polyamide

**G**



Polyamide

**C**




Aluminum club

**WSI**



Security knob

**PUSH**



Aluminum PUSH pad

**KR**



Aluminum round kit pair

**R2**



Aluminum round half-handle

**KIDLOC-2 T11**



Security knob



Triangle key







## **LOCINOX NV**

Mannebeekstraat 21  
8790 Waregem — Belgium

T. +32 (0)56 77 27 66

F. +32 (0)56 77 69 26

E. [info@locinox.com](mailto:info@locinox.com)

[www.locinox.com](http://www.locinox.com)

**Locinox P - English**

