


263 Series NarrowLine Lock

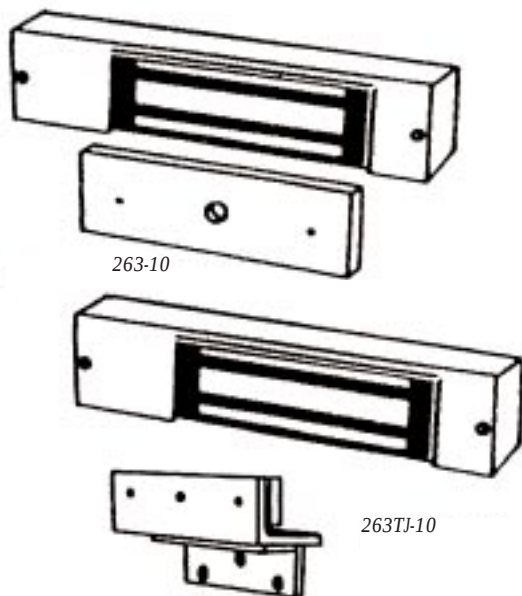

Recommended for medium security applications

Specifications

- Overall Lock Size: 9"L x 2"H x 2-3/16"D
- Current Draw: 0.68 Amp @ 12VDC, 0.35 Amp @ 24VDC
- Holding Force: 800 lbs
- Dual Voltage: Field Selectable 12 or 24 VDC
- UL listed

Models

- 263-10—Surface Mount
- 263TJ—Top Jamb Mount
Supplied with armature bracket for top jamb mounting on inswinging doors.


Options

- Adjustable Time Delay—ATD
- Anti-Tamper Switch—ATS
- Door Status Monitor—DSM
- Light (green)—L1
- Lights (red and green)—L2
- Magnetic Bond Sensor—MBS
- Rectifier (for use with AC)—RCP

Electromagnetic Lock Option Descriptions

ATD	Adjustable Time Delay—provides delayed relocking from 0-30 seconds
RCP	Rectifier—used to provide the use of AC power to operate 12V and 24V locks.
ATS	Anti-tamper Switch—triggers alarm if cover is removed from lock.
DSM	Door Status Monitor—indicates when door is opened or closed.
MBS	Magnetic Bond Sensor—indicates when lock is secured or unsecured.
HDB	Herculite Door Bracket Kit—to convert a standard magnetic lock for application on a glass door.
TJ	Top Jamb Mounting Kit—to convert for inswinging doors.
SMTD	Single Module Time Delay—provides 0-30 sec. adjustable time delay for relocking and an audible horn—specify voltage

268 Series NarrowLine Plus™ Lock

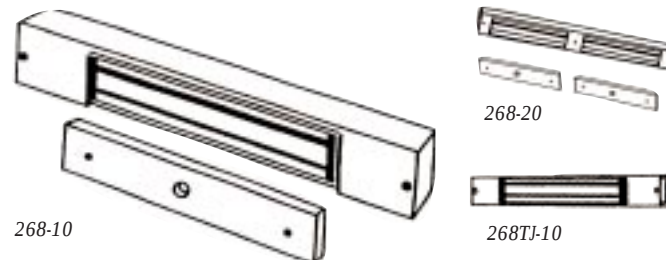

Specifications

- Overall Length: 14"L x 2"H x 2-3/16"D single; 25" double
- Current Draw: 0.68 Amp @ 12 VDC, 0.35 Amp @ 24 VDC
- Holding Force: 1200 lbs
- Dual Voltage field selectable 12/24 VDC
- UL listed

Outswinging Door Models

- 268-10 Single
- 268-15 Single with Split Armature
- 268-20 Double

Inswinging Door Models

- 268TJ-10 Single Top Jamb Unit
- 268TJ-20 Double Top Jamb Unit

Full Length Custom Housings

(outswinging doors only) (Specify size and hand when ordering)

- 268-30—C.L.H. horizontal single to 4ft. (handed)
- 268-40—C.L.H. horizontal double to 8 ft.
- 268-50—C.L.H. vertical single to 8 ft.
- 268-60—C.L.H. vertical double to 8 ft.

For longer lengths, contact Mayflower.

Options

■ Adjustable Time Delay	Single/Double ATD/ATD2
■ Anti-Tamper Switch (5.0 Amp @ 125VAC)	ATS/ATS
■ Door Status Switch (0.2 Amp @ 30VDC)	DSM/DSM2
■ *Light (green)	L1/L1
■ *Lights (red and green)	L2/L2
■ *Magnetic Bond Sensor	MBS/MBS2
■ Rectifier (for use with AC)	RCP/RCP2*
■ Signal Module Time Delay (Specify Voltage)	SMTDMOD/ SMTDMOD

*not available on 268-15

Accessories

- HDB268—1 U-Bracket (not available with 268TJ models)
- GP—1 Guard Plate—Single
- GPD—2 Guard Plate—Double