

# McKINNEY Hinge Catalog

## Full Surface Bearing Hinges

### Five Knuckle Standard Weight Series

**McKinney**  
ASSA ABLOY

TA2371

Stainless steel base material polished and passivated or Bronze base material polished and plated or furnished in powder coat.

TA2771


Steel base material polished and plated or furnished in powder coat.

#### Available Options

- TB (ball bearing)
- TCA (concealed bearing)
- HT (hospital tip)



#### APPLICATION

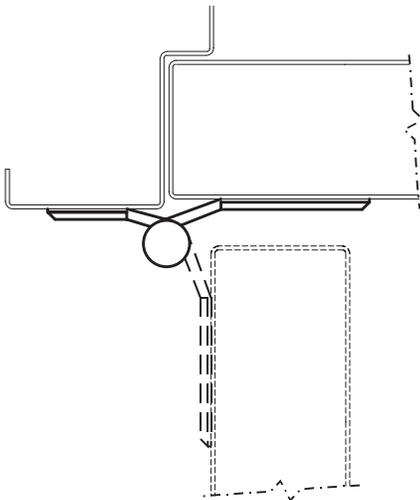

#### Available Sizes

Inches	MM	Gauge
4½	114.3	.134
5	127.0	.146

The narrow leaf is applied to the surface of the jamb with machine (½x12-24) screws and the door leaf is applied to the surface of the door with wood screws or grommet nuts and bolts (2x¼-20). Specify door thickness if greater than 1¾".

#### ANSI Cross Reference

A8312 Steel

On standard weight and/or medium frequency doors in schools, hospitals or other public buildings where medium traffic prevails. The hinges may be used on channel iron frames.