



ONE SOURCE ELECTRICAL AND LIGHTING

\$100 Freight Prepaid : No Minimum Orders

LED LIGHTING



NEW!



ALL LED

Lower Pricing

FlatPanel FLOODS

ECO-FLOODS

POWER FLOODS

ARRAY FLOODS

SLIMLINE FLOODS

DUSK-TO-DAWNS

HI BAY/LOW BAY

LINEAR HIGH BAY

BULLET FLOODS

UNDERCABINET

VANDAL RESISTANT

DARK SKY WALL PACKS

SLIMLINE WALL PACKS

TRADITIONAL WALL PACKS

MINI WALL PACKS

ENTRYWAY LIGHTING

GARAGE LIGHTING

MOTION-ACTIVATED LIGHTS

LED RECESSED RETROFITS

NEW!

Modular LED High Bays for Large Space Indoor Lighting

LINEAR LOW-BAY/HIGH BAY



featuring

FlatPanel™

Versatile Low-Profile LED Array



www.morrisproducts.com

1-888-777-6678

LIGHTING LAYOUT TOOL
available at morrisproducts.com

LIGHTING DISPLAYS
are available - see Display Brochure






POLE MOUNT



WALL MOUNT
80W thru 150W



1/2" KNUCKLE MOUNT

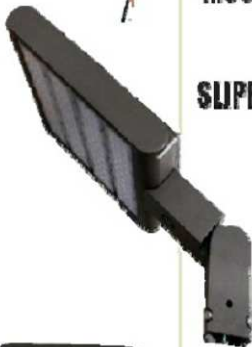

SLIPFITTER MOUNT



TRUNION MOUNT



WALL MOUNT
30W Thru 60W



BRACKET MOUNT

FlatPanel™

Versatile Low-Profile LED Array

Finally, a Fixture that is
Everything to Everyone...

**Lighting
Layout Tool** @
morrisproducts.com



**Lighting Display
Available**

THE MOST VERSATILE LED FAMILY AVAILABLE

- Multiple Mounting Options
- Full Range 15-300 Watt
- Replaces HID Lighting 50-1000 Watt
- 3000K & 5000K Color Temperatures

COVERS ALL APPLICATIONS

- Wallpack & Security Lighting
- Flood Lighting
- Area & Parking Lot Lighting



**Wallpack • Floodlight • Area Light
Perimeter & Security Light**



SPECIFICATIONS

- ▶ Phillips LUMILED LUXEON 3030 LEDs
- ▶ TOWIN or Inventronics Driver
- ▶ Integral Cooling Fin Releases Heat Efficiently to Maintain the Life of LEDs & LED Driver
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Polycarbonate Lens
- ▶ Superior Architectural Powder Coat Finish
- ▶ Stainless Steel Hardware
- ▶ Photocontrol can be installed remotely
- ▶ 50,000+ Hour Life Expectancy
- ▶ Voltage: 120/208/240/277VAC
- ▶ Color Temperature: 3000K & 5000K
- ▶ CRI: 81+
- ▶ Power Factor: .9 - .97
- ▶ Light Pattern: Type II, 7H X 7V, 120°V X 90°H
- ▶ Operating Temperature: -40°F To 131°F
- ▶ IP65 Rated (NEMA 4X) Dust & Water Tight
- ▶ cULus Listed for Wet Locations
- ▶ DLC Listed
- ▶ 5 Year Warranty


FLEXIBLE MOUNTING

Bracket	15W – 50W
1/2" Knuckle	15W – 50W
Wall Mount	30W – 150W
Trunion Mount	80W – 300W
Slipfitter Mount	80W - 300W
Pole Mount	80W – 300W




***All 100W thru 300W FlatPanel Series
Fixtures are Dimmable**

Bracket Mount

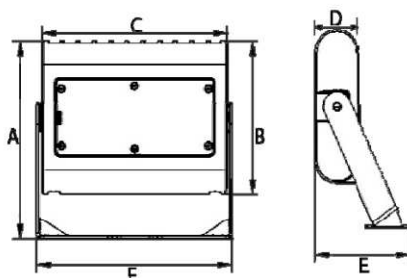

Cat. No.	Mounting	Watts	Housing Color	Color Temp	Delivered Lumens	Replaces Metal Halide	Dimensions (Inches)						Weight (Lbs)	Case Qty
							A	B	C	D	E	F		
71531	Bracket	15	Bronze	5000K	1,414	70W	4-5/8	3-1/4	4-1/4	1-1/2	3-1/2	4-1/2	2.3	18
71532	Bracket	30	Bronze	5000K	2,995	100W	6-1/2	5-1/8	6-7/8	1-1/2	3-1/2	7-1/8	4.3	10
71533	Bracket	50	Bronze	5000K	4,755	150W	7-1/2	6	8-1/2	1-3/4	3-3/4	8-3/4	6.4	6

1/2" Adjustable Knuckle Mount



Cat. No.	Mounting	Watts	Housing Color	Color Temp	Delivered Lumens	Replaces Metal Halide	Dimensions (Inches)			Weight (Lbs)	Case Qty
							A	B	C		
71551	1/2" Knuckle	15	Bronze	5000K	1,414	70W	3-1/4	4-3/8	1-1/2	2.3	18
71552	1/2" Knuckle	15	Bronze	3000K	1,400	70W	3-1/4	4-3/8	1-1/2	2.3	18
71553	1/2" Knuckle	15	White	3000K	1,400	70W	3-1/4	4-3/8	1-1/2	2.3	18
71554	1/2" Knuckle	30	Bronze	5000K	2,995	100W	5-1/8	6-7/8	1-1/2	4.3	10
71555	1/2" Knuckle	30	Bronze	3000K	2,900	100W	5-1/8	6-7/8	1-1/2	4.3	10
71556	1/2" Knuckle	30	White	3000K	2,900	100W	5-1/8	6-7/8	1-1/2	4.3	10
71557	1/2" Knuckle	50	Bronze	5000K	4,755	150W	6	8-1/2	1-3/4	6.1	6

Wall Mount

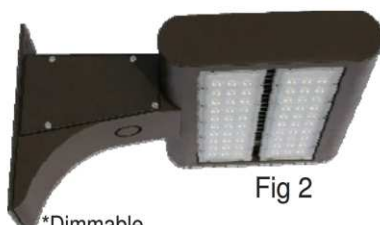


Fig 2








Fig 1

Cat. No.	Mounting	Fig	Watts	Housing Color	Color Temp	Delivered Lumens	Replaces Metal Halide	Dimensions (Inches)					Weight (Lbs)	Case Qty
								A	B	C	D	E		
71581	Wall Mount	1	30	Bronze	5000K	2,995	100W	5	5-3/4	6-7/8	1-1/2	5	4.6	8
71582	Wall Mount	1	50	Bronze	5000K	4,755	150W	6	6-3/4	8-1/2	1-3/4	5	8.3	4
71583	Wall Mount	2	80	Bronze	5000K	9,064	250W	9-7/8	16-5/8	12-5/8	3-7/16	8-5/8	22.5	1
71584*	Wall Mount	2	100	Bronze	5000K	11,000	400W	9-7/8	16-5/8	12-5/8	3-7/16	8-5/8	22.5	1
71585*	Wall Mount	2	150	Bronze	5000K	15,053	600W	9-7/8	16-5/8	12-5/8	3-7/16	8-5/8	22.5	1

*Dimmable

FlatPanel LED Series


Trunion Mount



*Dimmable

Cat. No.	Mounting	Watts	Housing Color	Color Temp	Delivered Lumens	Replaces Metal Halide	Dimensions (Inches)					Weight (Lbs)	Case Qty
							A	B	C	D	E		
71541	Trunion	80	Bronze	5000K	9,064	250W	12-3/8	12-5/8	9-7/8	3-7/16	3-1/4	18.2	1
71542*	Trunion	100	Bronze	5000K	11,000	400W	12-3/8	12-5/8	9-7/8	3-3/8	3-1/4	18.2	1
71543*	Trunion	150	Bronze	5000K	15,053	600W	17	12-1/2	9-7/8	3-3/8	7-1/8	22.5	1
71544*	Trunion	220	Bronze	5000K	25,684	750W	23-5/8	17	12-5/8	3-5/8	7-1/8	39	1
71545*	Trunion	300	Bronze	5000K	34,000	1000W	23-5/8	17	12-5/8	3-5/8	7-1/8	39	1

Slipfitter Mount




2-3/8" Slipfitter



*Dimmable

Cat. No.	Mounting	Watts	Housing Color	Color Temp	Delivered Lumens	Replaces Metal Halide	Dimensions (Inches)					Weight (Lbs)	Case Qty
							A	B	C	D	E		
71561	Slipfitter	80	Bronze	5000K	9,064	250W	18	12-5/8	9-7/8	3-3/8	7-1/8	25	1
71562*	Slipfitter	100	Bronze	5000K	11,000	400W	18	12-5/8	9-7/8	3-3/8	7-1/8	25	1
71563*	Slipfitter	150	Bronze	5000K	15,053	600W	18	12-5/8	9-7/8	3-3/8	7-1/8	25	1
71564*	Slipfitter	220	Bronze	5000K	25,684	750W	25	17	12-5/8	3-5/8	7-1/8	41	1
71565*	Slipfitter	300	Bronze	5000K	34,000	1000W	25	17	12-5/8	3-5/8	7-1/8	41	1

Pole Mount



*Dimmable

Cat. No.	Mounting	Watts	Housing Color	Color Temp	Delivered Lumens	Replaces Metal Halide	Dimensions (Inches)						Weight (Lbs)	Case Qty
							A	B	C	D	E	F		
71573	Pole Mount	80	Bronze	5000K	9,064	250W	17	12-5/8	9-7/8	3-7/16	7-1/8	7-1/2	22.5	1
71574*	Pole Mount	100	Bronze	5000K	11,000	400W	17	12-1/2	9-7/8	3-3/8	7-1/8	7-1/2	22.5	1
71575*	Pole Mount	150	Bronze	5000K	15,053	600W	17	12-1/2	9-7/8	3-3/8	7-1/8	7-1/2	22.5	1
71576*	Pole Mount	220	Bronze	5000K	25,684	750W	23-5/8	17	12-5/8	3-5/8	7-1/8	7-1/2	38.0	1
71577*	Pole Mount	300	Bronze	5000K	34,000	1000W	23-5/8	17	12-5/8	3-5/8	7-1/8	7-1/2	38.0	1



LED Lighting

CC4


Pole Mount

2-3/8" Slipfitter

Trunion

Trunion Mounting Spacing


Area & Flood Lighting

- ▶ Cree COB LEDs
- ▶ Meanwell Driver
- ▶ Integral Cooling Fin Releases Heat Efficiently to Maintain the Life of LEDs & LED Driver
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Tempered Glass Lens
- ▶ Superior Architectural Bronze Powder Coat Finish
- ▶ Stainless Steel Hardware
- ▶ Photo control can be installed remotely
- ▶ 50,000+ Hour Life Expectancy
- ▶ Voltage: 120/208/240/277VAC
- ▶ Color Temperature: 5000K
- ▶ CRI: 81
- ▶ Light Pattern: Type II 120° Beam Angle
- ▶ Operating Temperature: -40°F To 131°F
- ▶ IP65 (NEMA 4X) Rated Dust & Water Tight
- ▶ cULus Listed for Wet Locations
- ▶ DLC Listed
- ▶ 5 Year Warranty



Cat. No.	#of LEDs	Mounting	Watts	Delivered Lumens	Replaces Metal Halide	Dimensions (Inches)					Weight (Lbs)	Case Qty	
						L1	L2	W	D	E			
71380	4	Trunion	120	10,321	400W	15	17-1/2	11-3/4	4-1/4	2	18	1	
71381	4	2-3/8" Slipfitter	120	10,321	400W	15	22-5/16	11-3/4	4-1/4	-	18	1	
71386	4	Pole Mount	120	10,321	400W	15	20	11-3/4	4-1/4	-	18	1	
71382	6	Trunion	160	14,830	600W	18-7/8	22-29/32	15	4-7-16	2	29	1	
71383	6	2-3/8" Slipfitter	160	14,830	600W	18-7/8	26-1/8	15	4-7/16	-	29	1	
71387	6	Pole Mount	160	14,830	600W	18-7/8	24-1/4	15	4-7/16	-	29	1	
71384	6	Trunion	200	17,911	750W	18-7/8	22-29/32	15	4-7-16	2	29	1	
71385	6	2-3/8" Slipfitter	200	17,911	750W	18-7/8	26-1/8	15	4-7/16	-	29	1	
71388	6	Pole Mount	200	17,911	750W	18-7/8	24-1/4	15	4-7/16	-	29	1	



1/2" Adjustable Knuckle



2-3/8" Slipfitter



Yoke Bracket



Trunion



- Cree CXA LEDs
- Meanwell Driver
- Integral Cooling Fin Releases Heat Efficiently to Maintain the Life of LEDs & LED Driver
- Corrosion Resistant Die Cast Aluminum Housing
- Tempered Glass Lens
- Superior Architectural Powder Coat Finish
- Stainless Steel Hardware
- Photo control can be installed remotely

- Voltage: 120/208/240/277VAC
- Light Pattern: 120° Beam Angle
- Operating Temperature: -40°F To 131°F
- 50,000+ Hour Life Expectancy
- IP65 Rated (NEMA 4X) Dust & Water Tight
- cULus Listed for Wet Locations
- DLC Listed
- 5 Year Warranty

Cat. No.	Mounting	Watts	Housing Color	Color Temp	Delivered Lumens	Replaces Metal Halide	CRI	Dimensions (Inches)				Wt. Lbs	Case Qty
								A	B	C	D		
71334	1/2" Adj. Knuckle	10	Bronze	5000K	983	50W	73	3-1/8	5-7/16	4-7/16	2-13/16	1	12
71336	1/2" Adj. Knuckle	10	Bronze	3000K	942	50W	83	3-1/8	5-7/16	4-7/16	2-13/16	1	12
71337	1/2" Adj. Knuckle	10	White	3000K	942	50W	83	3-1/8	5-7/16	4-7/16	2-13/16	1	12
71357	Dark Sky Visor for Bronze 10 Watt Fixtures											1	1
71342	Yoke (Bracket)	30	Bronze	5000K	2732	100W	83	6	8	8-5/8	4-3/4	6	8
71343	1/2" Adj. Knuckle	30	Bronze	5000K	2732	100W	83	6	9-7/16	8-5/8	4-3/4	6	8
71339	1/2" Adj. Knuckle	30	Bronze	3000K	2275	100W	83	6	9-7/16	8-5/8	4-3/4	6	8
71340	1/2" Adj. Knuckle	30	White	3000K	2275	100W	83	6	9-7/16	8-5/8	4-3/4	6	8
71358	Dark Sky Visor for Bronze 30 Watt Fixtures											1	1
71345	Yoke (Bracket)	50	Bronze	5000K	4357	150W	83	6-13/16	9-1/8	10	5-1/2	8	4
71346	1/2" Adj. Knuckle	50	Bronze	5000K	4357	150W	83	6-13/16	9-1/8	10	5-1/2	9	4
71359	Dark Sky Visor for Bronze 50 Watt Fixtures											1	1
71352	Trunion	80	Bronze	5000K	6585	250W	84	8-1/2	9-1/8	12-1/4	7-1/4	17	1
71353	2-3/8" Slipfitter	80	Bronze	5000K	6585	250W	84	8-1/2	15-7/8	12-1/4	7-1/4	19	1
71355	Trunion	93	Bronze	5000K	8396	400W	76	8-1/2	11-7/8	12-1/4	7-1/4	17	1
71356	2-3/8" Slipfitter	93	Bronze	5000K	8396	400W	76	8-1/2	15-7/8	12-1/4	7-1/4	20	1

NEW!



71333
Available
October 2016



Lower Pricing




71330




71332

**All Models Include
Premium 105-285V
Surge Protected
Locking Photocell**



71330

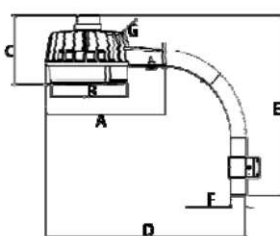

71332/71333

- ▶ Phillips LUMILED LUXEON 3030 LEDs
- ▶ TOWIN Driver
- ▶ All Models Include Morris #39052 Surge Protected 110-277V Twist-Lock Photocell
- ▶ Integral Cooling Fin Releases the Heat Efficiently to Maintain the Life of LEDs & LED Driver
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Anti-Glare Polycarbonate Frosted Lens
- ▶ Superior Powder Coat Finish
- ▶ Stainless Steel Hardware
- ▶ Voltage: 120/208/240/277VAC
- ▶ Color Temperature: 5000K Cool White
- ▶ CRI: 83
- ▶ Power Factor: .98 @ 120V .91 @ 277V
- ▶ Input Current: .41A @ 120V .49A @ 277V
- ▶ Light Pattern: 134° Beam Angle
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ *71332 & 71333 Include Optional Use 21" 90° Mounting Arm
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ DLC Certified - 71332 & 71333 only (71330 is not DLC Listed)
- ▶ 5 Year Warranty

Cat. No.	Mounting	Watts	Delivered Lumens	Replaces Metal Halide	DLC	Dimensions (Inches)							Weight (Lbs)	Case Qty
						A	B	C	D	E	F	G		
71330	Wall	42.2	2167	100W	No	14	10	7	-	-	-	-	6.3	6
71332*	Bracket	48	5342	150W	Yes	13-1/2	10	7-1/8	22-7/16	18-5/8	1-5/8	9	7.5	2
71333*	Bracket	50	5,026	150W	Yes	13-1/2	9-1/2	7	24	21-1/4	1-5/8	9	7.5	2

*Mounting Arm Included


Array-Flood LED Series



71312
Full Bracket



71313
1/2" Adjustable Knuckle



- ▶ Cree XTE LEDs
- ▶ Integral Cooling Fin Releases Heat Efficiently to Maintain the Life of LEDs & LED Driver
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Tempered Glass Lens
- ▶ Anodized Aluminum Reflector
- ▶ Superior Architectural Bronze Powder Coat Finish
- ▶ Stainless Steel Hardware
- ▶ Photocell not included (can be installed on fixture)
- ▶ 60,000+ Hour LED Life Expectancy


- ▶ Voltage: 120/208/240/277VAC
- ▶ Color Temperature: 4700K Cool White
- ▶ CRI: 72+
- ▶ Light Pattern: 120° Beam Angle
- ▶ Operation Temperature: -22°F to 104°F
- ▶ Weight: 7.1 Lbs
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ cULus Listed for Wet Locations
- ▶ DLC Listed
- ▶ 5 Year Warranty

Cat. No.	Mounting	Watts	Delivered Lumens	Replaces Metal Halide	Number of LEDs	Dimensions (Inches)					Case Qty
						A	B	C	D	E	
71312	Full Bracket	47	3628	100W	20	7"	10"	1-7/8"	1-7/8"	2-3/4"	6
71313	1/2" Adj. Knuckle	47	3628	100W	20	7"	10"	1-7/8"	2-3/4"	2-3/4"	6

Slim-Line Wallpack/Flood LED Series



71390/71391 (20W & 30W)



71392/71393 (50W & 80W)

Shown with 71397 Trunion Mount (Sold Separately)



**71396
1/2" Knuckle**



**71395/71397
Bracket/Trunion**



**71398
Slipfitter**

- ▶ Cree CXA LEDs; TOWIN Driver
- ▶ Integral Cooling Fin Releases the Heat Efficiently to Maintain the Life of LEDs & LED Driver
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Tempered Glass Lens
- ▶ Anodized Aluminum Optical Reflector
- ▶ Superior Architectural Bronze Powder Coat Finish
- ▶ Stainless Steel Hardware
- ▶ 3 Standard Knockouts to Screw in Optional Photocontrol

Mounting & PhotoCell Applications

- ▶ Optional Mounting Accessories: 71320, 71323, 71324, 71325, 71328, 71329, 71395, 71396, 71397, 71398 - Sold Separately
- ▶ 71320 Junction Box Included with all fixtures **except** 71322, 71326, 71327 - (Junction Box Sold Separately for these 3 Cat#s)
- ▶ 71320 Junction Box is required In Photocell applications for 71322, 71326, 71327 Fixtures
- ▶ Cat# 39063 Photocell Extension required on 71322, 71326 & 71327 Fixtures for Photocell applications
- ▶ See Pg AA3 for Morris Pencil Style Photocell & Photocell Extension
- ▶ Voltage: 120/208/240/277VAC
- ▶ Color Temperature: 5000K Cool White
- ▶ Light Pattern: 140° Beam Angle
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ 4 Threaded Apertures - (4) Sides
- ▶ cULus listed for Wet Locations
- ▶ DLC Listed - 5 Year Warranty




Cat. No.	Watts	Delivered Lumens	Replaces Metal Halide	CRI	Dimensions				Weight (Lbs.)	Case Qty	
					L	H	W1	W2			
71390	20	1874	70W	75	6-1/2"	7-3/4"	1-1/2"	2-3/8"	4	6	
71391	30	2687	100W	72	6-1/2"	7-3/4"	1-1/2"	2-3/8"	4	6	
71392	50	4363	150W	83	9-1/2"	11-1/4"	2-3/8"	2-3/8"	10	2	
71393	80	7371	250W	82	9-1/2"	11-1/4"	2-3/8"	2-3/8"	10	2	

Accessories

Cat No.	Description	Applicable Fixture	Weight (Lbs)	Case Qty	
71395	Bracket Mount	71390/71391 (20W & 30W)	.5	30	
71396	1/2" Adjustable Knuckle Mount	71390/71391 (20W & 30W)	.5	30	
71397	Trunion Mount	71392/71393 (50W & 80W)	1.1	10	
71398	Slipfitter Mount	71392/71393 (50W & 80W)	2.9	5	



**71322
(40W)**



71320



71328



**71326/71327
(86W & 153W)**



71323



71329

Cat. No.	Watts	Delivered Lumens	Replaces Metal Halide	CRI	Dimensions				Weight (Lbs.)	Case Qty	
					L	H	W1	W2			
71322	40	3687	150W	72	7-1/2"	8"	2-3/4"	2-7/16"	4	6	
71326	86	6550	250W	83	14-1/4"	12-3/4"	4-7/8"	3-7/8"	12	1	
71327	153	12,500	400W	82	14-1/4"	12-3/4"	4-7/8"	3-7/8"	12	1	

Accessories




Cat No.	Description	Applicable Fixture	Weight (Lbs)	Case Qty	
71323	1/2" Adjustable Knuckle Mount	71322 (40W)	2.5	12	
71324	2-3/8" Slipfitter Mount	71322 (40W)	4.6	12	
71325	Trunion Mount	71322 (40W)	3.3	12	
71328	Trunion Mount	71326 & 71327 (86W & 153W)	4.6	12	
71329	2-3/8" Slipfitter Mount	71326 & 71327 (86W & 153W)	6.4	12	
71320	Optional Junction Box	Wall Mount Applications	2.0	12	

**LED
Lighting**

CC8




- ▶ Philips Lumiled LUXEON 3030 2D
- ▶ TOWIN Driver
- ▶ CRI: 84+
- ▶ 106+ Lumens/Watt
- ▶ Power Factor: .97+
- ▶ 1/2" NPT Knuckle Mount
- ▶ Isolated Driver Compartment for Optimal Thermal Management
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Superior Architectural Powder Coat Finish
- ▶ Fluted Reflector & Polycarbonate Lens
- ▶ Photocontrol (not included) can be installed remotely
- ▶ Voltage: 120-277VAC
- ▶ 35° Beam angle available in 15W & 28W
- ▶ 65° Beam angle available in 15W, 28W, & 42W
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ IP65 (Nema 4) Watertight
- ▶ cULus Listed
- ▶ DLC Listed
- ▶ 5 Year Warranty

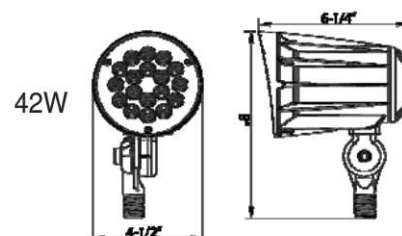


Cat. No.	Watts	Color Temperature	Color	Delivered Lumens	Beam Angle	CRI	Replaces Halogen	Weight (Lbs)	Case Qty
Spot Floods 35° Beam Angle									
71660	15	5000K	Bronze	1620	35	83	100W	1.5	12
71663	28	5000K	Bronze	3022	35	83	2X100W	2.5	8
Floods 65° Beam Angle 15 Watt									
71675	15	3000K Warm White	Bronze	1536	65	84	100W	1.5	12
71676	15	3000K Warm White	Green	1536	65	84	100W	1.5	12
71677	15	3000K Warm White	Black	1536	65	84	100W	1.5	12
71678	15	3000K Warm White	White	1536	65	84	100W	1.5	12
71679	15	5000K Cool White	Bronze	1620	65	83	100W	1.5	12
71680	15	5000K Cool White	Green	1620	65	83	100W	1.5	12
71681	15	5000K Cool White	Black	1620	65	83	100W	1.5	12
71682	15	5000K Cool White	White	1620	65	83	100W	1.5	12
Floods 65° Beam Angle 28 Watt									
71683	28	3000K Warm White	Bronze	2724	65	84	2 X 100W	2.5	8
71684	28	3000K Warm White	Green	2724	65	84	2 X 100W	2.5	8
71685	28	3000K Warm White	Black	2724	65	84	2 X 100W	2.5	8
71686	28	3000K Warm White	White	2724	65	84	2 X 100W	2.5	8
71687	28	5000K Cool White	Bronze	3022	65	83	2 X 100W	2.5	8
71688	28	5000K Cool White	Green	3022	65	83	2 X 100W	2.5	8
71689	28	5000K Cool White	Black	3022	65	83	2 X 100W	2.5	8
71690	28	5000K Cool White	White	3022	65	83	2 X 100W	2.5	8
Floods 65° Beam Angle 42 Watt									
71691	42	3000K Warm White	Bronze	4204	65	83	3 X 100W	4	6
71692	42	3000K Warm White	Green	4204	65	83	3 X 100W	4	6
71693	42	3000K Warm White	Black	4204	65	83	3 X 100W	4	6
71694	42	3000K Warm White	White	4204	65	83	3 X 100W	4	6
71695	42	5000K Cool White	Bronze	4488	65	83	3 X 100W	4	6
71696	42	5000K Cool White	Green	4488	65	83	3 X 100W	4	6
71697	42	5000K Cool White	Black	4488	65	83	3 X 100W	4	6
71698	42	5000K Cool White	White	4488	65	83	3 X 100W	4	6

Bullet Floodlight LED Series



30 Watt Bullet




12 Watt Bullet

- Cree CXA LEDs
- TOWIN Driver
- 1/2" NPT Knuckle Mount
- Isolated Driver Compartment for Optimal Thermal Mgmt
- Corrosion Resistant Die Cast Aluminum Housing
- Superior Architectural Powder Coat Finish
- Fluted Reflector & Tempered Glass Lens
- Photo control (not included) can be installed remotely
- Voltage: 120-277VAC
- Light Pattern: 12W-23°, 30W-75°
- Operation Temperature: -40°F to 131°F
- 50,000+ Hour LED Life Expectancy
- IP54 (NEMA 3) Dust & Watertight
- cULus Listed
- 5 Year Warranty




Cat. No.	Watts	Color Temperature	Color	Delivered Lumens	CRI	Replaces Halogen	Weight (Lbs)	Case Qty	
71362	12	3000K Warm White	Bronze	817	83	75W	2	6	
71368	12	3000K Warm White	Green	817	83	75W	2	6	
71370	12	3000K Warm White	Black	817	83	75W	2	6	
71371	12	3000K Warm White	White	817	83	75W	2	6	
71363	12	5000K Cool White	Bronze	814	75	75W	2	6	
71364	12	5000K Cool White	Green	814	75	75W	2	6	
71372	12	5000K Cool White	Black	814	75	75W	2	6	
71373	12	5000K Cool White	White	814	75	75W	2	6	
71365	30	3000K Warm White	Bronze	2274	83	3 X 75W	4	6	
71369	30	3000K Warm White	Green	2274	83	3 X 75W	4	6	
71374	30	3000K Warm White	Black	2274	83	3 X 75W	4	6	
71375	30	3000K Warm White	White	2274	83	3 X 75W	4	6	
71366	30	5000K Cool White	Bronze	2500	74	3 X 75W	4	6	
71367	30	5000K Cool White	Green	2500	74	3 X 75W	4	6	
71376	30	5000K Cool White	Black	2500	74	3 X 75W	4	6	
71377	30	5000K Cool White	White	2500	74	3 X 75W	4	6	

PVC Mounting Post



- Outdoor Low Voltage/Line Voltage Lighting Applications
- Sturdy "Ground Grabber" stabilizer with teeth and ribs for maximum stability
- Rugged, Extruded Thick Wall PVC Post with Molded-in color
- 1/2" NPT thread fits standard Floodlights & Lawn Lights

PVC Stake



- Heavy Duty PVC Stake
- Excellent Anchor for Low Voltage & Line Voltage Lighting
- 1/2" NPT thread fits standard Floodlights & Lawn Lights

Cat No.	Diameter (A)	Spike Length (B)	Case Qty
18101	3.28"	18.5"	12

Cat No.	Diameter (A)	Spike Length (B)	Case Qty
18106	2"	8-1/2"	100
18107	3"	10"	50

LED
Lighting


CC10



- Turns Lights on Automatically When Motion is Detected
- Ideal for Walkways, Entrances and Patios
- Provides Years of Trouble-Free Service
- Time/Lux Adjustable Motion Sensitivity, Light Sensitivity & Time Delay Settings from 10 seconds to 10 Minutes
- Durable Die Cast Aluminum IP65 Weather Resistant Housing
- Can be Wall or Eave Mounted to standard Junction Box
- Tempered Glass Lens
- Fluted Prismatic Reflector
- Gasketed for Recessed or Surface Mount
- 25,000 Hour Driver/Lamp Life Expectancy
- Operating Temperature: -4°F to 122°F
- AC 120V/240V 60 Hz Voltage
- Philips LUXEON M LEDs
- Each Lamp Head has 20° Beam Angle
- Up to 240° Detection Angle out to 60Ft
- CRI: 75
- Color Temp: 3000K or 5000K
- 5 Year Warranty

Cat. No.	Description	Housing Color	Color Temperature	Watts	Lumens	Replaces Incandescent	Case Qty
72560	One Head Unit	Bronze	3000K	14	1030	75W	8
72561	One Head Unit	White	3000K	14	1030	75W	8
72566	One Head Unit	Bronze	5000K	14	1030	75W	8
72567	One Head Unit	White	5000K	14	1030	75W	8
72562	Two Head Unit	Bronze	3000K	24	2060	2 X 75W	8
72563	Two Head Unit	White	3000K	24	2060	2 X 75W	8
72568	Two Head Unit	Bronze	5000K	24	2060	2 X 75W	8
72569	Two Head Unit	White	5000K	24	2060	2 X 75W	8
72564	Three Head Unit	Bronze	3000K	36	3090	3 X 75W	8
72565	Three Head Unit	White	3000K	36	3090	3 X 75W	8
72570	Three Head Unit	Bronze	5000K	36	3090	3 X 75W	8
72571	Three Head Unit	White	5000K	36	3090	3 X 75W	8

WorkLights LED Series



- Portable LED Worklights
- 5Ft Power Cord
- Adjustable Fixture Angle
- Integral Cooling Fins Release Heat Efficiently
- Corrosion Resistant Die Cast Aluminum Housing
- Polycarbonate Lens
- Superior Architectural Powder Coat Finish
- Stainless Steel Hardware
- Input Voltage:120 VAC
- 50,000+ Hour LED Life Expectancy
- Color Temperature: 5000K
- Light Pattern:120°V X 90°H
- Operating Temperature: -40°F To 131°F
- IP65 Rated (NEMA 4X) Dust & Water Tight
- cULus Listed for Wet Locations
- 5 Year Warranty

Cat. No.	Watts	Color Temperature	Delivered Lumens	Replaces Incandescent	Dimensions (Inches)			Case Qty
					A	B	C	
71990	15	5000K	1300	100W	6	9	6	8
71991	30	5000K	2600	200W	8-5/8	10-1/2	7-1/4	4
71992	50	5000K	4700	300W	10-3/8	11-3/4	7-1/4	4

Motion Activated Twin Par Light



- ▶ Turns Lights on Automatically When Motion is Detected
- ▶ Ideal for Walkways, Entrances and Patios
- ▶ Durable High Impact Nonmetallic Construction
- ▶ Weather Resistant Housing
- ▶ For Use with Two 150 Watt (Max) Outdoor Lamps (Lamps Not Included)
- ▶ 180 Degree Detection Angle and Up to 53 Feet
- ▶ Can be Wall or Eave Mounted
- ▶ Auto/Off/Manual Override Switch
- ▶ Time/Lux Adjustable Switch Reduces False Alarms
- ▶ AC 120V/60 Hz Voltage



Cat. No.	Color	Case Qty
73210	Bronze	12
73211	White	12

Motion Activated Halogen Light




- ▶ Turns Lights on Automatically When Motion is Detected
- ▶ Ideal for Walkways, Entrances and Patios
- ▶ Durable High Impact Weather Resistance Housing
- ▶ Construction in White or Bronze
- ▶ Provides Years of Trouble-Free Service
- ▶ For use with one 150 watt (max) halogen lamp (lamp included)
- ▶ 110 Degree Detection Angle and Up to 40 Feet
- ▶ Can be Wall or Eave Mounted
- ▶ Auto/Off/Manual Override Switch
- ▶ Time/Lux Adjustable Switch Reduces False Alarms
- ▶ AC 120V/60 Hz Voltage



Cat. No.	Color	Case Qty
73220	Bronze	20
73221	White	20

300 & 500 Watt Quartz Floodlight




- ▶ UL Listed for Wet Locations
- ▶ Precision Die Cast Aluminum Housing
- ▶ Polished Aluminum Reflector
- ▶ 1/2" Threaded Swivel Knuckle for Flexible Aiming
- ▶ Includes Premium 500 Watt, T-3 Double Ended 120/130V Halogen Lamp
- ▶ Hinged, Tempered Glass Lens
- ▶ Screw Style Frame



Cat. No.	Watts	Volts	Color	Case Qty
71079	300	120	Bronze	12
71080	500	120	Bronze	12
71081	500	120	White	12

1500 Watt Quartz Floodlight - 240 Volt



- ▶ UL Listed for Wet Locations
- ▶ Precision Die Cast Aluminum Housing
- ▶ Polished Aluminum Reflector
- ▶ Bronze Finish
- ▶ Hinged, Tempered Glass Lens
- ▶ 1/2" Threaded Swivel Knuckle For Flexible Aiming
- ▶ Includes 1500W, T-3 Double Ended 240V Halogen Lamp



Cat. No.	Watts	Volts	Color	Case Qty
71090	1500	240	Bronze	12

LED
Lighting

CC12


UltraThin Canopy LED Series



- ▶ Cree CXA LEDs
- ▶ Integral Cooling Fin Releases the Heat Efficiently to Maintain the Life of LEDs & LED Driver
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Prismatic Polycarbonate Lens
- ▶ Superior Architectural Powder Coat Finish
- ▶ Stainless Steel Hardware
- ▶ 4 Threaded Apertures - (1)Back, (3)Sides
- ▶ Photo control (not included) can be installed on fixture
- ▶ Voltage: 120/208/240/277VAC
- ▶ Color Temperature: 5000K Cool White
- ▶ CRI: 83+
- ▶ Light Pattern: Up to 135° Beam Angle
- ▶ Operating Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Weight: 5.2 Lbs
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ UL & cUL listed for Wet Locations
- ▶ 5 year Warranty

Cat. No.	Watts	Housing Color	Color Temperature	Delivered Lumens	Replaces Metal Halide	Case Qty	
71600	45	Bronze	4000K	4005	150W	1	
71601	45	White	4000K	4005	150W	1	
71602	45	Black	4000K	4005	150W	1	
71603	45	Bronze	5000K	4149	150W	1	
71604	45	White	5000K	4149	150W	1	
71605	45	Black	5000K	4149	150W	1	
71606	70	Bronze	4000K	5703	250W	1	
71607	70	White	4000K	5703	250W	1	
71608	70	Black	4000K	5703	250W	1	
71609	70	Bronze	5000K	5928	250W	1	
71610	70	White	5000K	5928	250W	1	
71611	70	Black	5000K	5928	250W	1	


Vandal Resistant Canopy LED Series

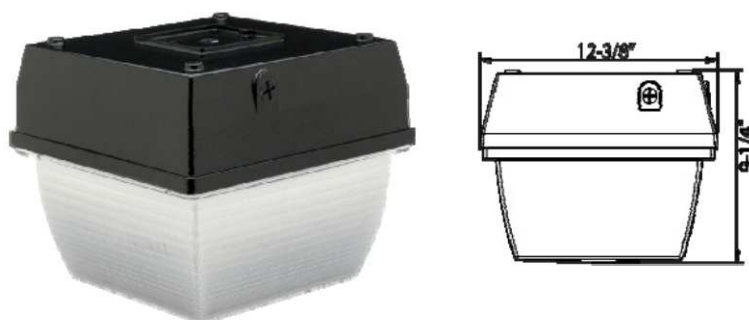

- ▶ Phillips LUMILED LUXEON 3030 LEDs
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Prismatic Polycarbonate Lens
- ▶ Superior Architectural Bronze Powder Coat Finish
- ▶ Stainless Steel Hardware
- ▶ Photo control (not included) can be installed on fixture
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Voltage: 120/277VAC
- ▶ 4 Threaded Apertures - (1)Top, (3)Sides
- ▶ Color Temperature: 5000K Cool White
- ▶ CRI: 85
- ▶ Light Pattern: 129° Beam Angle
- ▶ Power Factor: .98
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ 5 Year Warranty

Cat. No.	Watts	Color Temperature	Delivered Lumens	Replaces Metal Halide	Weight (Lbs)	Case Qty	
71462	40	5000K	3692	150W	16	1	
71464	60	5000K	5702	200W	16	1	
71466	80	5000K	6841	250W	16	1	

Gas Station/Recessed Canopy LED Series

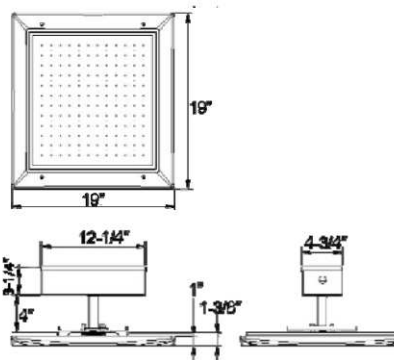

Recessed Mount Only


- ▶ Phillips 3030 LEDs
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Polycarbonate Lens
- ▶ Superior Architectural White Powder Coat Finish
- ▶ Stainless Steel Hardware
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Photo control (not included) can be installed remotely
- ▶ Voltage: 120/277VAC
- ▶ Color Temperature: 5000K Cool White
- ▶ CRI: 84
- ▶ Light Pattern: 120° Beam Angle
- ▶ Weight: 25 Lbs
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ 5 Year Warranty

Cat. No.	Watts	Mounting	Delivered Lumens	Replaces Metal Halide	Case Qty
71400	115	Recessed	13,769	400W	1


UFO Low Bay/Hi-Bay LED Series




Hook Mount
(Included)




Ceiling Mount
(Optional)




Bracket Mount
(Optional)



Pendant Mount
(Optional)







- ▶ Cree COB LEDs
- ▶ Inventronics Driver
- ▶ Integral Cooling Fin Releases Heat Efficiently to Maintain the Life of LEDs & LED Driver
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Superior Architectural White Powder Coat Finish
- ▶ Stainless Steel Hardware
- ▶ Hook Mount (Alternate Mounting Kits Available)
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Voltage: 120/208/240/277VAC
- ▶ 5 Threaded Apertures - (4) Sides, (1) Top
- ▶ Color Temperature: 5000K Cool White
- ▶ CRI: 82+
- ▶ Light Pattern: 120° Beam Spread Flood
- ▶ 72" Wire whip for easy install
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ DLC Listed
- ▶ 5 Year Warranty



Cat. No.	Watts	Delivered Lumens	Replaces Metal Halide	Dimensions (Inches)				Weight (Lbs)	Case Qty
				A	B	C	D		
71402	100	9,954	400W	13	6-3/8	8-11/16	10-7/16	15	1
71403	150	17,371	600W	16	7-5/8	10-5/16	13-1/4	26	1
71404	220	25,045	750W	16	7-5/8	10-5/16	13-1/4	26	1
71407	Ceiling Mount Kit								1
71408	Bracket Mounting Kit for 71402								1
71410	Bracket Mounting Kit for 71403 & 71404								1
71409	Pendant Mounting Kit - 3/4" X 6" (Exposed)								1

LED
Lighting

CC14



Reflectors Sold Separately
(Installation must include Reflector for DLC Listing)



- ▶ Phillips LUMILED LUXEON 3030 LEDs
- ▶ TOWIN Driver
- ▶ Integral Cooling Fin Releases Heat Efficiently to Maintain the Life of LEDs & LED Driver
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Superior Architectural Bronze Powder Coat Finish
- ▶ Stainless Steel Hardware
- ▶ Eye-Hook Mount
- ▶ 150W thru 220W are Dimmable
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy

- ▶ Voltage: 120/208/240/277 VAC
- ▶ Color Temperature: 5000K Cool White
- ▶ CRI: 84
- ▶ Light Pattern: 60° - 120° Beam Spread
- ▶ Power Factor: 0.97
- ▶ 35" Wire whip for easy install
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ DLC Listed
- ▶ 5 Year Warranty
- ▶ 150 & 220 Watt are Dimmable

Cat. No.	Description	Delivered Lumens	Dimensions (Inches)			Weight (Lbs)	Case Qty	
			A	B	C			
50 Watt (Replaces 150W Metal Halide)								
71500	50 Watt Fixture Body (Reflector Sold Separately)	4,547	5-1/4	6-1/4	7-3/4	6	6	
71501	60° Aluminum Reflector for 71500 Lo-Bay Fixture	-	13-1/4	6-1/4	12-1/2	1	10	
71502	120° Aluminum Reflector for 71500 Lo-Bay Fixture	-	10-1/2	6-1/4	15-3/4	1	10	
71503	12" Polycarbonate Prismatic Reflector for 71500 Lo-Bay Fixture	-	11-1/2	6-1/4	12-1/4	1	8	
100 Watt (Replaces 400W Metal Halide)								
71505	100 Watt Fixture Body (Reflector Sold Separately)	10,186	7	6-1/2	8-1/8	9	4	
71506	60° Aluminum Reflector for 71505 Lo-Bay Fixture	-	14-3/4	6-1/2	12-3/8	1	10	
71507	120° Aluminum Reflector for 71505 Lo-Bay Fixture	-	20-7/8	6-1/2	11	1	10	
71508	16" Polycarbonate Prismatic Reflector for 71505 & 71510 Fixtures	-	16-1/8	7-1/8	17-3/4	1	8	
*Dimmable 150 Watt (Replaces 600W Metal Halide)								
71510*	150 Watt Fixture Body (Reflector Sold Separately)	14,671	8-1/2	7-1/8	8-3/4	13	4	
71511	60° Aluminum Reflector for 71510 Hi-Bay Fixture	-	16-1/2	7-1/8	13-1/2	1	10	
71512	120° Aluminum Reflector for 71510 Hi-Bay Fixture	-	20-7/8	7-1/8	11-1/4	1	10	
71508	16" Polycarbonate Prismatic Reflector for 71505 & 71510 Fixtures	-	16-1/8	7-1/8	17-3/4	1	8	
*Dimmable 220 Watt (Replaces 750W Metal Halide)								
71514*	220 Watt Fixture Body (Reflector Sold Separately)	24,086	12-1/2	6-3/4	-	28	1	
71515	90° Aluminum Reflector for 71514 Hi-Bay Fixture	-	16-3/4	6-3/4	13-1/4	1	10	

Linear Low Bay/High Bay LED Series



Low Bay - Frosted Lense
60 Watt




High Bay - Clear Lense
120 Watt & 180 Watt

- Ideal Replacement for Conventional HID & Fluorescent Lighting
- Applications Include Manufacturing, Warehousing & Other Large Indoor Spaces
- Fast, Easy Installation with Pluggable Disconnect
- Precision Engineered Aluminum Heat Sink Provides Maximum Natural Convective Cooling for Low Lumen Loss
- All units are modular & linkable which allows same model units to make a continuous run
- Model 71702 is not DLC Listed
- Models 71712 & 71722 are DLC Listed


- 120/277 Volt
- Efficacy: 125 LM/W
- CRI: >80
- Color Temperature: 5000K
- PF: >.95
- Current: 1.07A
- Operating Temperature: -22°F to +104°F
- Light Pattern: Horizontal: 115° Vertical: 89°
- Driver: TOWIN NI75W-66C1150 High PF
- LEDs: Edison 2835
- 50,000+ Hour Life Expectancy
- 5 Year Warranty

LED
Lighting


CC16

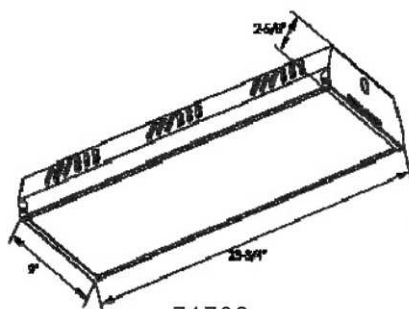




71702
Modular/Linkable

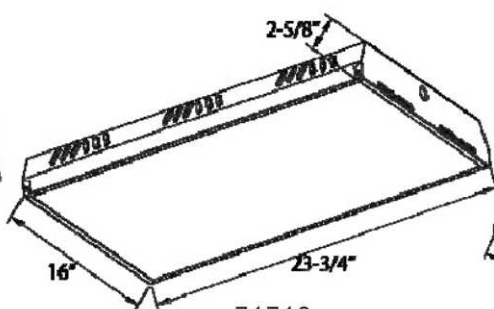

71712
Modular/Linkable

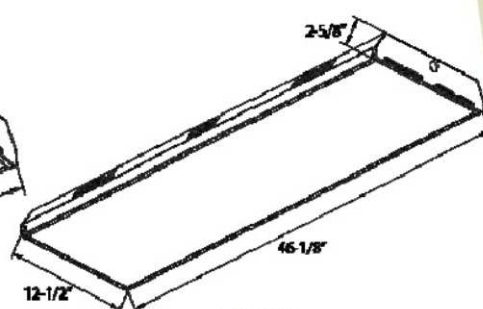


71722
Modular/Linkable

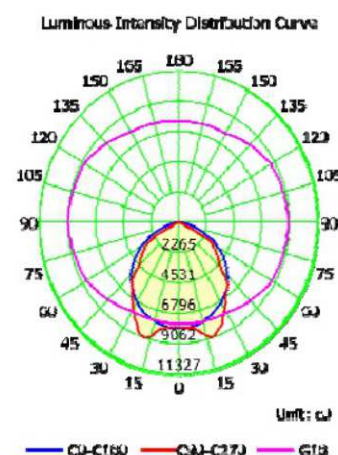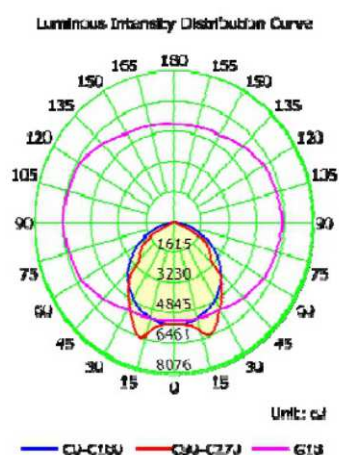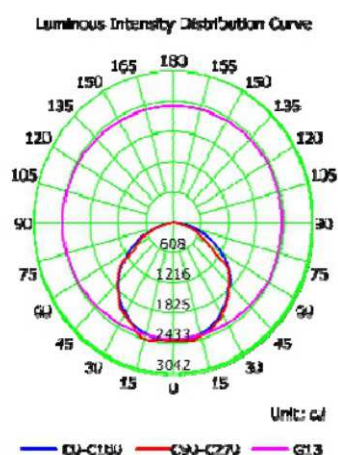

Cat No.	Watts	Lumens	Replaces Metal Halide	Lens	Length	Width	Depth	Case Qty
Low Bay								
71702	60	7,700	175W	Frosted	23-3/4"	9"	2-5/8"	1
High Bays								
71712	120	15,198	400W	Clear	23-3/4"	16"	2-5/8"	1
71722	180	22,903	600W	Clear	46-1/8"	12-1/2"	2-5/8"	1

Classic Mini Wallpack LED Series




Lower Pricing Higher Lumens!

- ▶ Phillips LUMILED LUXEON 3030 LEDs
- ▶ TOWIN Driver
- ▶ 71418, 71419, 71422 & 71423 include Photocell
- ▶ 71420 & 71421 do not include Photocell
- ▶ Photo control can be installed on fixture if needed
- ▶ Polycarbonate Housing - Bronze or White
- ▶ Polycarbonate Lens
- ▶ Die Cast Aluminum Mounting Plate
- ▶ Stainless Steel Hardware
- ▶ Voltage: 120/208/240/277VAC
- ▶ Color Temperature: 5000K
- ▶ CRI: 80+
- ▶ Light Pattern: 180° Beam Angle
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ 1 Bottom Threaded Aperture, 1 Back Wiring Knockout
- ▶ Weight: 5 Lbs
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ 5 Year Warranty

Cat. No.	Photocell	Watts	Housing Color	Color Temp	Delivered Lumens	Replaces Metal Halide	Voltage	Case Qty	
Traditional Square Lens - No Photocell									
71420	No	20	Bronze	5000K	1500	70W	120-277	6	
71421	No	30	Bronze	5000K	3000	100W	120-277	6	
Traditional Square Lens - Photocell Included									
71422	Yes	20	Bronze	5000K	1500	70W	120-277	6	
71418	Yes	20	White	5000K	1500	70W	120-277	6	
71423	Yes	30	Bronze	5000K	3000	100W	120-277	6	
71419	Yes	30	White	5000K	3000	100W	120-277	6	


Designer Mini Wallpack LED Series

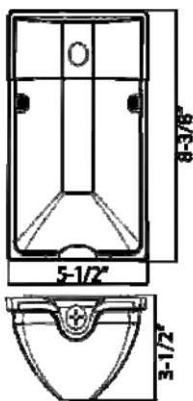

- ▶ Phillips LUMILED LUXEON 3030 LEDs
- ▶ Fixture includes 120 Volt Photocell (Can only operate on 120 Volt)
- ▶ Die Cast Aluminum Housing & Mounting Plate
- ▶ Color: Bronze or White
- ▶ Polycarbonate Lens
- ▶ Stainless Steel Hardware
- ▶ Voltage: 120V AC
- ▶ Color Temperature: 5000K Cool White & 4000K Neutral
- ▶ CRI: 80
- ▶ Light Pattern: 180° Beam Angle
- ▶ Power Factor: .99
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ 1 Bottom Threaded Aperture, 1 Back Wiring Knockout
- ▶ Weight: 5 Lbs
- ▶ IP54 (NEMA 3) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ 5 Year Warranty

Cat. No.	Photocell	Watts	Housing Color	Color Temp	Delivered Lumens	Replaces Metal Halide	Voltage	Case Qty	
Designer Curved Lens - Photocell Included									
71521	Yes	17	Bronze	4000K	1684	70W	120	12	
71522	Yes	17	White	4000K	1684	70W	120	12	
71523	Yes	17	Bronze	5000K	1752	70W	120	12	
71524	Yes	17	White	5000K	1752	70W	120	12	
71525	Yes	25	Bronze	4000K	2126	100W	120	12	
71526	Yes	25	White	4000K	2126	100W	120	12	
71527	Yes	25	Bronze	5000K	2235	100W	120	12	
71528	Yes	25	White	5000K	2235	100W	120	12	


Entryway/Walkway Wallmount LED Series

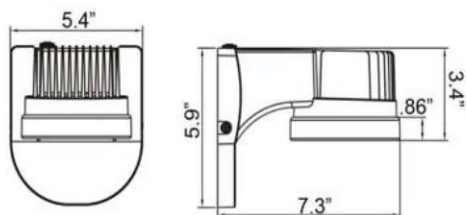

- ▶ Cree CXA LEDs
- ▶ Dark Sky Compatible
- ▶ Includes Morris #39069 Photocell for 120V usage only
- ▶ Unit can be used for 120-240V if Photocell is disconnected
- ▶ Integral Cooling Fin Releases the Heat Efficiently to Maintain the Life of LEDs & LED Driver
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Anti-Glare Polycarbonate Frosted Lens
- ▶ Superior Architectural Powder Coat Finish
- ▶ Stainless Steel Hardware
- ▶ Voltage: 120VAC
- ▶ CRI: 72+
- ▶ Light Pattern: 120° Beam Angle
- ▶ Operating Temperature: -22°F to 104°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Weight: 5 Lbs
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ 5 Year Warranty

Cat. No.	Color	Watts	Color Temperature	Delivered Lumens	Replaces Metal Halide	Length	Width	Height	Case Qty
71299	Bronze	14	3000K Warm White	750	50W	7-1/4"	5-3/8"	5-7/8"	6
71300	Bronze	14	5000K Cool White	750	50W	7-1/4"	5-3/8"	5-7/8"	6
71301	White	14	3000K Warm White	750	50W	7-1/4"	5-3/8"	5-7/8"	6

Designer Wallpack LED Series

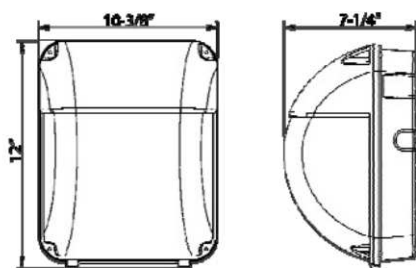


- ▶ Phillips LUMILED LUXEON 3030 LEDs
- ▶ TOWIN Driver
- ▶ Die Cast Aluminum Housing
- ▶ Bronze or White Powder Coat Finish
- ▶ Prismatic Polycarbonate Lens
- ▶ Die Cast Aluminum Mounting Plate
- ▶ Stainless Steel Hardware
- ▶ 3 Threaded Apertures - (1)Back, (2)Sides
- ▶ 1 Extra KO knockout on back
- ▶ Photo control (not included) can be installed on fixture
- ▶ Voltage: 120/208/240/277VAC
- ▶ Color Temperature: 5000K Cool White
- ▶ CRI: 84
- ▶ Light Pattern: 180° Beam Angle
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ (3) 1/2" KOs at Base of Fixture
- ▶ Weight: 6.5 Lbs
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ Photocell Not Included
- ▶ 5 Year Warranty

Cat. No.	Watts	Housing Color	Delivered Lumens	Replaces Metal Halide	Weight (Lbs)	Case Qty
71432	50	Bronze	4489	150W	6.5	1
71433	50	White	4489	150W	6.5	1

- ▶ Phillips LUMILED LUXEON 3030 LEDs
- ▶ TOWIN Driver
- ▶ Die Cast Aluminum Housing - Bronze or White Finish
- ▶ High Impact Heat Resistant Borosilicate Glass
- ▶ 4 Threaded Apertures - (1)Top, (1)Back, (2)Sides
- ▶ Stainless Steel Hardware
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Photo Control (not included) can be installed on fixture

- ▶ Light Pattern Small Wallpack: 130° Beam Angle
- ▶ Light Pattern Medium Wallpack: 94° Beam Angle
- ▶ Voltage: 120/208/240/277VAC
- ▶ Color Temperature: 5000K Cool White
- ▶ CRI: 83 Power Factor: 0.98
- ▶ IP54 (NEMA 3) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ DLC Listed
- ▶ 5 Year Warranty
- ▶ Visor (Order Separately for Dark Sky Applications)

Small WallPack

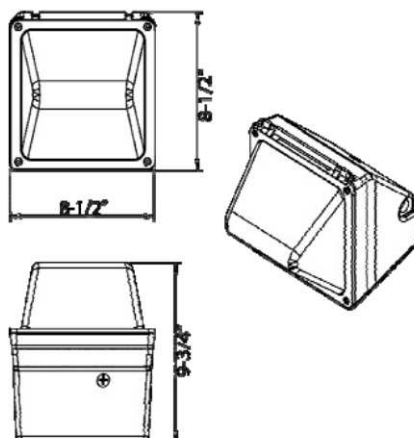


Cat. No.	Watts	Housing Color	Delivered Lumens	Replaces Metal Halide	Weight (Lbs)	Case Qty
----------	-------	---------------	------------------	-----------------------	--------------	----------

Small Wall Packs

71435	30	Bronze	2507	100W	6	4
71436	30	White	2507	100W	6	4

Medium WallPack

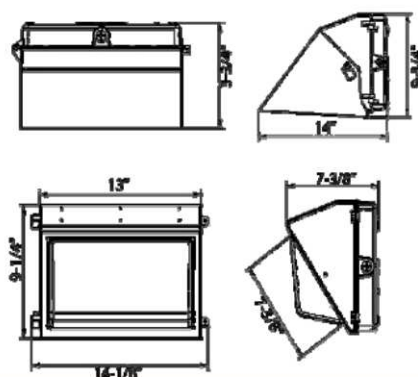

Shown with Visor


50W Available October 2016

Cat. No.	Old No.	Watts	Housing Color	Delivered Lumens	Replaces Metal Halide	DLC	Weight (Lbs)	Case Qty
----------	---------	-------	---------------	------------------	-----------------------	-----	--------------	----------

Medium Wall Packs

71437		50	Bronze	4732	150W	Yes	11	1
71438		50	White	4732	150W	Yes	11	1
71444	71425	60	Bronze	5498	175W	Yes	11	1
71445	71428	60	White	5498	175W	Yes	11	1
71446	71426	80	Bronze	7585	250W	Yes	11	1
71447	71429	80	White	7585	250W	Yes	11	1
71427			Full Cutoff Visor Bronze					8
71430			Full Cutoff Visor White					8

Classic Large Wallpack LED Series

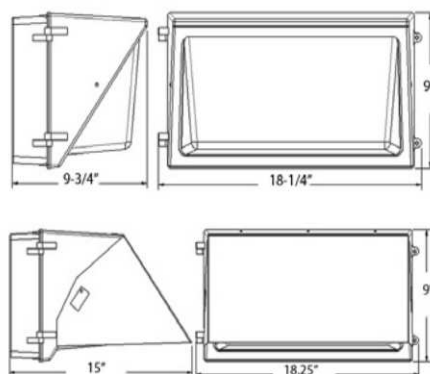

Shown with Visor

- ▶ Phillips LUMILED LUXEON 3030 LEDS
- ▶ TOWIN Driver
- ▶ Die Cast Aluminum Housing - Bronze or White Finish
- ▶ High Impact Heat Resistant Borosilicate Glass
- ▶ 4 Threaded Apertures - (1)Top, (1)Back, (2)Sides
- ▶ Stainless Steel Hardware
- ▶ Operation Temperature: -40°F to 131°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Photo Control (not included) can be installed on fixture
- ▶ Light Pattern: 115° Beam Angle
- ▶ Voltage: 120/208/240/277VAC
- ▶ Color Temperature: 5000K Cool White
- ▶ Weight: 11 Lbs
- ▶ Power Factor: .98
- ▶ CRI: 83
- ▶ IP54 (NEMA 3) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ DLC Listed
- ▶ 5 Year Warranty
- ▶ Visor (Order Separately for Dark Sky Applications)

Cat. No.	Old Cat No.	Watts	Housing Color	Delivered Lumens	Replaces Metal Halide	DLC	Weight (Lbs)	Case Qty	
71448	71440	120	Bronze	12,112	400W	Yes	22	1	
71449	71441	120	White	12,112	400W	Yes	22	1	
71442			Full Cutoff Visor Bronze					1	
71443			Full Cutoff Visor White					1	

Dark Sky Wallpack LED Series




71302



71304



71306



- ▶ Cree XPE LEDs
- ▶ Integral Cooling Fin Releases the Heat Efficiently to maintain the Life of LEDs & Driver
- ▶ Corrosion Resistant Die Cast Aluminum Housing
- ▶ Tempered Glass Lens
- ▶ Anodized Aluminum Reflector
- ▶ Superior Architectural Bronze Powder Coat Finish
- ▶ Stainless Steel Hardware, Photocell not included
- ▶ 71302 Dark Sky Type II Cutoff Light Pattern
- ▶ 71304 & 71306 Dark Sky Type III Cutoff Light Pattern
- ▶ Voltage: 120/208/240/277VAC
- ▶ Photo Control (not Included) can be installed on fixture
- ▶ Color Temperature: 4700K Cool White
- ▶ CRI: 75+
- ▶ Light Pattern: Up to 120° Beam Angle
- ▶ Operation Temperature: -22°F to 104°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Weight: 5.2 Lbs
- ▶ IP65 (NEMA 4X) Dust & Water Tight
- ▶ cULus listed for Wet Locations
- ▶ 5 Year Warranty

Cat. No.	Watts	Delivered Lumens	Replaces Metal Halide	Number of LEDs	Input Current	Case Qty	
71302	14	655	50W	5	700 mA	6	
71304	25	1019	70W	10	500 mA	6	
71306	38	1700	100W	15	700 mA	6	

LED
Lighting

CC20



Hard Wire or Plug-In

Inter-Connect Cord



AC Cord with Switch & Plug



Kit Includes



Inter-Connect Splice



Junction Box


- ▶ 8" Units - 2 LED/3.5 Watts (Linkable - Connect up to 28 Fixtures)
- ▶ 12" Units - 3 LED / 5 Watts (Linkable - Connect up to 15 Fixtures)
- ▶ 18" Units - 5 LED / 8 Watts (Linkable - Connect up to 12 Fixtures)
- ▶ 24" Units - 7 LED / 11 Watts (Linkable - Connect up to 10 Fixtures)

- ▶ High Quality Long Life CREE LEDs
- ▶ Extruded Aluminum Alloy Housing
- ▶ Architectural UV Resistant Powder Coat Finish
- ▶ Power is supplied to hardwired (dimmable) units using junction box (provided) and interconnect cord or splice (provided)
- ▶ Multiple Fixtures may be linked together in series using interconnect cords or splices

- ▶ Interconnect female receptacles are located at both ends of the fixture
- ▶ Accessories Included: Junction box - (Includes Hardware & Romex Connectors); 18" Interconnect Cord, 2" Interconnect Connector; 43" AC Cord, Adhesive Mounts & Mounting Screws
- ▶ Easy mounting screw holes at both ends of fixture
- ▶ Low Starting Temperature -4°F (-20°C)
- ▶ 120 Volt
- ▶ 5 Year Warranty

Cat. No.	Length	Color	Cord Color	Type	Watts	Mean Lumens	Width	Height	Case Qty
3000K Warm White (Dimmable)									
71251	8"	White	White	Hard Wire or Plug-In	2 Led 3.5 W	160	2"	1"	12
71252	12"	White	White	Hard Wire or Plug-In	3 Led 5 W	240	2"	1"	12
71260	18"	White	White	Hard Wire or Plug-In	5 LED 8 W	389	2"	1"	12
71264	24"	White	White	Hard Wire or Plug-In	7 LED 11 W	522	2"	1"	12
71269	8"	Brushed Aluminum	Black	Hard Wire or Plug-In	2 LED 3.5 W	160	2"	1"	12
71270	12"	Brushed Aluminum	Black	Hard Wire or Plug-In	3 LED 5 W	240	2"	1"	12
71271	18"	Brushed Aluminum	Black	Hard Wire or Plug-In	5 LED 8 W	389	2"	1"	12
71272	24"	Brushed Aluminum	Black	Hard Wire or Plug-In	7 LED 11 W	522	2"	1"	12
71274	8"	Bronze	Brown	Hard Wire or Plug-In	2 LED 3.5 W	160	2"	1"	12
71275	12"	Bronze	Brown	Hard Wire or Plug-In	3 LED 5 W	240	2"	1"	12
71276	18"	Bronze	Brown	Hard Wire or Plug-In	5 LED 8 W	389	2"	1"	12
71277	24"	Bronze	Brown	Hard Wire or Plug-In	7 LED 11 W	522	2"	1"	12
4700K Cool White (Dimmable)									
71279	8"	White	White	Hard Wire or Plug-In	2 LED 3.5 W	160	2"	1"	12
71280	12"	White	White	Hard Wire or Plug-In	3 LED 5 W	240	2"	1"	12
71281	18"	White	White	Hard Wire or Plug-In	5 LED 8 W	389	2"	1"	12
71282	24"	White	White	Hard Wire or Plug-In	7 LED 11 W	522	2"	1"	12
Accessories									
71240	30" White Under Cabinet Jumper Cord								25

8" Commercial Recessed Lighting Retrofit Kit LED Series



- ▶ Can be installed in most 8" Downlights
- ▶ Phillips LUMILED LUXEON 3030 LEDs
- ▶ Aluminum Housing/Trim - Paintable
- ▶ 15" Greenfield Wire Whips to Driver and Line Side with box connectors included
- ▶ Guaranteed Single Bin Color Consistency with enhanced illumination uniformity
- ▶ Beam Angle: 90°
- ▶ Dimmable Down to 10%
- ▶ Compatible with most household dimmers
- ▶ Input Voltage: 120-277 VAC
- ▶ Operating Temperature: -4°F to 104°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Damp Location Rated
- ▶ 5 Year Warranty

Cat. No.	Size	Watts	Color Temperature	Delivered Lumens	CRI	Replaces Incandescent	Case Qty
72662	8"	25	4000K	1700	80	2 x 75W	2
72664	8"	45	4000K	3400	80	4 x 75W	2



CFL Fiberglass Lampholders with Lamp and Cover



82105



82106



- ▶ 13W GU24 Lampholder
- ▶ Polycarbonate Cover
- ▶ Twist Lock Mounting
- ▶ GU 24 Medium Base
- ▶ Fits 3-1/4" or 4" Outlet Box
- ▶ 4-1/2" Outside Diameter
- ▶ 7" Leads
- ▶ 120 Volts

Cat. No.	Description	Dimensions				Case Qty
		A	B	C	D	
82105	Keyless	3.07	3.50	.53	4.56	48
82106	Pull Chain	3.07	3.82	1.28	5.03	48
82107	GU24 Replacement Lamp	2.52	1.09	-	3.10	48

LED Motion Activated Closet Light



- ▶ Provides Energy Saving Motion Activated Lighting when needed off when not needed
- ▶ Mount Inside Closet, Cabinet, Hallway or Stairwell
- ▶ Turns On when Motion Detected - Off 8 seconds after no motion detection
- ▶ Senses Ambient Light Level - will not turn on if ambient light is sufficient
- ▶ 10Ft Motion Detection Range
- ▶ 3 AAA Batteries Included - Average 1

Cat. No.	Color	Box Qty
82109	White	1

LED Light Meter



- ▶ LED Light Meter
- ▶ High Precision - 0-200,000 LUX (20,000 FC) +/- 3% Range
- ▶ Auto & Manual Range Switching
- ▶ Inquiry Function for Max & Min Values
- ▶ Data Hold Function
- ▶ Peak Value Measurement
- ▶ Zero Calibration Function
- ▶ Relative Value Measurement
- ▶ 3-1/2" LCD Display
- ▶ FC/LUX Conversion Function
- ▶ Out-of-Range Indication
- ▶ Low Battery Indicator
- ▶ Touch Tone/Mute Function
- ▶ Auto Power Off




Available
October 2016


Cat. No.	Case Qty
59151	20



4"



5 & 6"




- ▶ LED Retrofit Kits for Recessed Downlighting
- ▶ Can be installed in most 4", 5" & 6" Downlights
- ▶ Aluminum Housing/Trim - Paintable
- ▶ Simple Screw-In Installation
- ▶ In-Line Pluggable Disconnect Included
- ▶ Guaranteed Single Bin Color Consistency with enhanced illumination uniformity
- ▶ Dimmable Down to 10%
- ▶ Compatible with most household dimmers
- ▶ Input Voltage: 120VAC
- ▶ Operating Temperature: 32°F to 140°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Wet Location Rated
- ▶ 5 year Warranty



Cat No.	Style	Size	Color Temperature	Watts	Delivered Lumens	CRI	Replaces Incandescent	Case Qty
Smooth Style								
72604	Smooth	4"	3000K	10.5	650	90	65W	40
72605	Smooth	4"	4000K	10.5	650	90	65W	40
72602	Smooth	5" & 6"	3000K	14.5	1100	90	75W	30
72603	Smooth	5" & 6"	4000K	14.5	1100	90	75W	30
72601	Smooth	5" & 6"	5000K	14.5	1200	80	75W	30
Baffle Style (Grooves)								
72607	Baffle	4"	3000K	10.5	650	90	65W	40
72608	Baffle	4"	4000K	10.5	650	90	65W	40
72609	Baffle	5" & 6"	3000K	14.5	1100	90	75W	30
72610	Baffle	5" & 6"	4000K	14.5	1100	90	75W	30
72611	Baffle	5" & 6"	5000K	14.5	1200	80	75W	30

Surface Mount Lighting Retrofit Kit LED Series



Available October 2016

- ▶ Surface Mount
- ▶ Perfect for Residential and Commercial
- ▶ Driverless - AC Direct Wired
- ▶ Can install in 4" J-Box & most 5" & 6" Downlights
- ▶ Hardwire to J-Box OR Screw-In to Recessed Can
- ▶ Torsion Spring & Brackets for Can Mounting
- ▶ Aluminum Housing/Trim - Paintable
- ▶ In-Line Pluggable Disconnect Included
- ▶ Guaranteed Single Bin Color Consistency with enhanced illumination uniformity
- ▶ Dimmable Down to 10%
- ▶ Compatible with most household dimmers
- ▶ Input Voltage: 120VAC
- ▶ Operating Temperature: 32°F to 140°F
- ▶ 50,000+ Hour LED Life Expectancy
- ▶ Wet Location Rated
- ▶ 5 year Warranty



Cat. No.	Size	Color Temperature	Watts	Delivered Lumens	CRI	Replaces Incandescent	Case Qty
72612	6"	3000K	14.5	1100	90+	75W	30
72613	6"	4000K	14.5	1100	90+	75W	30
72614	6"	5000K	14.5	1100	90+	75W	30