




National Guard
Products, Inc.

109N/114N/178S
Astragal

Do not install this product to impede the opening or closing of the door. Check the adjustment of the door seal to insure the door assembly closes and latches properly, whether or not equipped with a closing device.

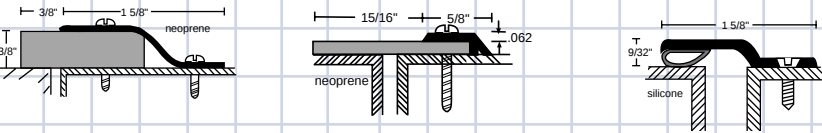

Installation
Instructions

1. Measure and cut astragal to the exact length required for the opening.
2. Mark hole locations with a punch or other marking tool.
3. Do not drill through gasketing material.
4. Drill pilot holes for each screw using a 7/64" drill bit.
5. Place gasketing against the face of the active door with neoprene overlapping the inactive door.
6. Install with screws provided, working from one end to the other.
7. Adjust as necessary.