

Pyran® Platinum F


Fire-Protective Safety Glass Ceramic

- 3/16" (5mm) thick glass ceramic
- Heavy duty 7 mil durable safety film
- Neutral coloration - clear and wireless
- Advanced manufacturing process eliminates the need for surface polishing
- Etched with UL classification on each piece
- 5-year Manufacturer Warranty
- Weight: 2.5 lbs./sq. ft.
- STC 31 rating

Fire-rating information:

- Certified by UL to ANSI/UL9, ANSI/UL10B, ANSI/UL10C, CAN/ULC-S104, ULC CAN4-S106 with closed cell PVC foam glazing tape like NGP L-GT-116, L-GT-118, or L-GT-132

- IBC applicable edition may limit maximum size allowable

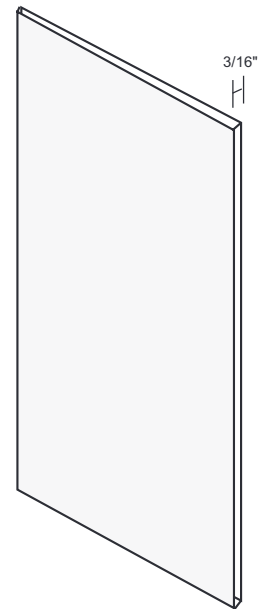

Rating	Application	Max. Visible Glass Area (Sq. Inches)	Max. Width Visible Glass	Max. Height Visible Glass
20, 45, 60, 90 Minute	Doors* (non-temp rise)	3,708	37-3/4"	98-1/4"
20, 45, 60, 90 Minute	Side-lites, Borrowed lites, Transom lites	4,933	98-1/4"	98-1/4"
180 Minutes	Doors* including temp-rise	100	12"	33"

*with fire-rated glass Lite kit

Impact Safety Rating Information:

Meets ANSI Z97.1, Class A

Meets CPSC 16CFR 1201 (Category I and II)

Complies with IBC requirements for use in doors, side-lites, transom lites and borrowed lites .