


NGP-Edge® Sealing System/Smoke and Draft Control Gasketing Category “G” and “H” Classified



9450B Brown
9450C Charcoal



Intumescent with TPE Fin Fire and Smoke Seal



20, 45, 60, 90 minute rated category B wood doors
perimeter application up to:

single swing 4'0 x 9'0

standard pair 8'0 x 9'0 use 9550 at the meeting edge





1/8" clearance required between door and frame


Available in 36", 48", 84", 96" and 108" lengths

Self-Adhesive

See adhesive specifications on page G9

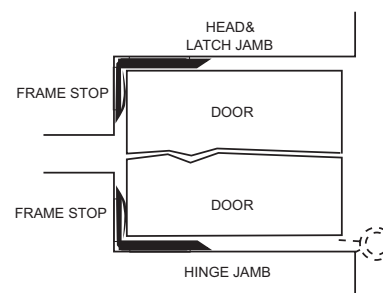

9550 Gray
9550DKB Brown

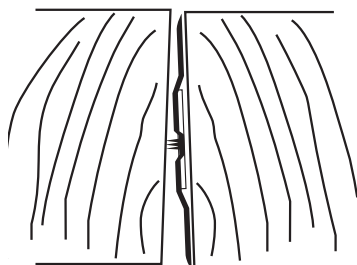

NGP-Edge® Intumescent with TPE Fins Fire and Smoke Seal



20, 45, 60, 90 minute rated category B wood doors up to:

single swing 4'0 x 9'0, perimeter application

pairs 8'0 x 9'0, perimeter/meeting edge



1/8" clearance required between doors and between door & frame

Available in 36", 48", 84", 96" and 108" lengths

Self-Adhesive

See adhesive specifications on page G9

