


National Guard Products Inc.

1-800-
647-7874



9850 Self Adhesive Fire & Smoke Seal

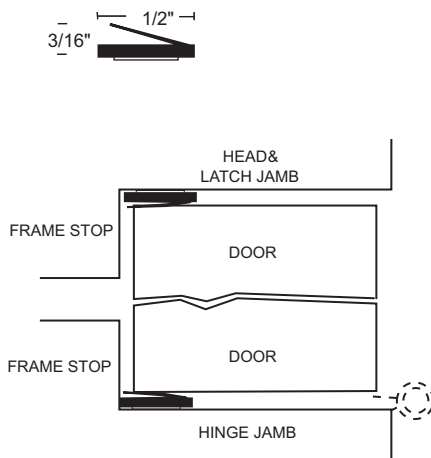

UL Tested and Classified for Fire and Smoke Doors

* Seals against smoke, fire, air and weather

* Excellent compression; door latches easily

INSTALLATION INSTRUCTIONS

1. The surface temperature of the frame must be above 50°F for the adhesive to bond properly.
2. Clean frame with clean wipe provided to remove dust, oil, grease and dirt. Wax coated or high gloss painted surfaces may require roughening of the surface with a scotch brite pad or sandpaper so adhesive will properly bond.
3. Measure and pre-cut pieces to fit where seal is to mount. 1/8" clearance required between door and frame.
4. Remove protective backing 1 to 2 feet at a time.
5. Position on frame where illustrated.
6. Adhere by pressing firmly (approx. 15 lbs. pressure required) straight down along entire length of gasketing. Do not remove and relocate.
7. Make sure the seal does not impede proper closing and latching of the door.

Made in USA



POSITIVE PRESSURE TESTED GASKETING MATERIALS FOR FIRE DOORS. INTENDED FOR APPLICATION TO STEEL TYPE FIRE DOORS, RATED UP TO 3 HOURS AND WOOD TYPE FIRE DOORS, RATED UP TO 1 1/2 HOURS.



GASKETING MATERIALS FOR FIRE DOORS

Smoke & Draft Control Gasketing (Category H) tested to UL 1784; meets requirements of NFPA 105, IBC for use on 'S' label doors.



NGP-EDGE Sealing System (Category G) for use on category B wood type fire doors rated up to 90 minutes, single swing up to 4'0" x 9'0" and pairs up to 8'0" x 9'0" .

10.13

STORAGE AND SHELF LIFE

The adhesive on this seal has a shelf life of one year stored at 75°F and 50% relative humidity or less