



## Extended Width Bumper Seal Thresholds

All thresholds this page



884-6 1.10 lbs./ft.

884-6DKB 1.10 lbs./ft.

6"

884-7 1.31 lbs./ft.

884-7DKB 1.31 lbs./ft.

7"

884-8 1.52 lbs./ft.

884-8DKB 1.52 lbs./ft.


8"



**VINYL FOOT SEAL OPTION:**

used instead of caulking to increase the weather resistance of the threshold. Specify on order.

## Offset Bumper Seal Thresholds

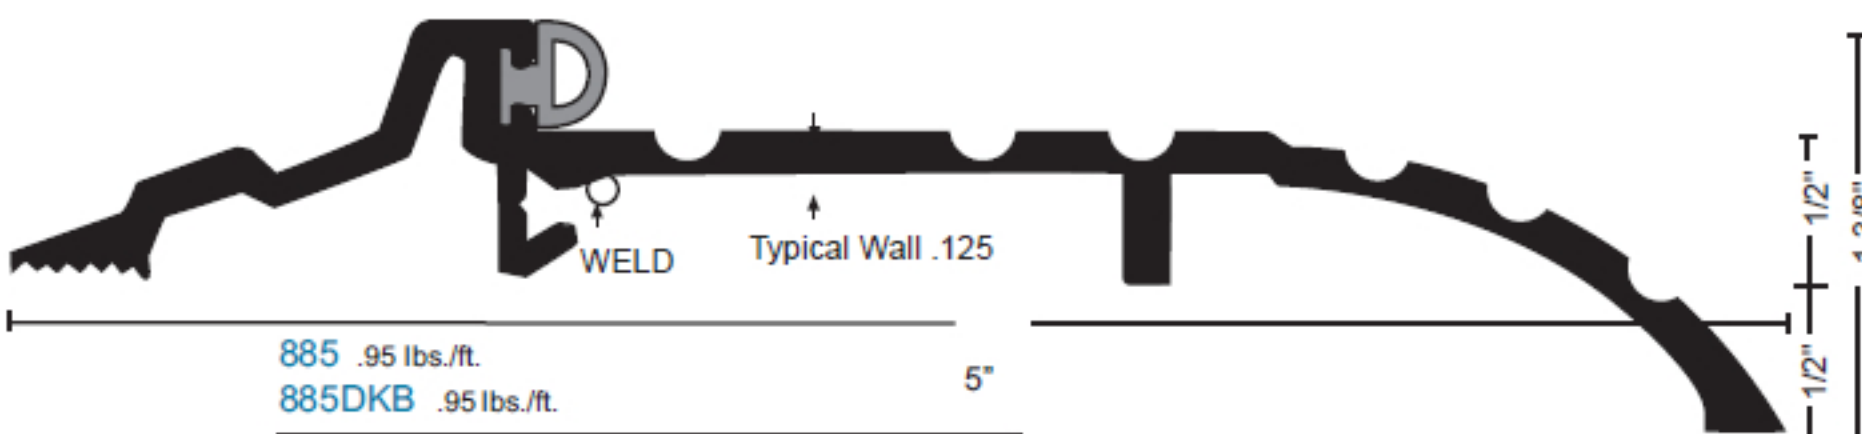

885 .95 lbs./ft.

885DKB .95 lbs./ft.

5"

885-6 1.16 lbs./ft.

885-6DKB 1.16 lbs./ft.

6"

885-7 1.37 lbs./ft.

885-7DKB 1.37 lbs./ft.

7"



### BUMPER SEAL

Seals against the door providing weather resistance

Vinyl ("V") supplied unless other material specified

Options:

NGP-TPV ("N")

Silicone ("S")

Pile ("P")

### MATERIALS & FINISHES

- Aluminum mill finish
- DKB - Aluminum dark bronze finish



- Optional: Slip Resistant SIA Finish

### FASTENERS

#10 x 1-1/2" FH zinc plated wood screws furnished. Dark bronze supplied with DKB thresholds.