



FS10, FS22, FS34, FSSP

Flood Shield

PRODUCT CUT SHEET

Material

Anodized Aluminum Housing

- $\frac{1}{4}$ " Marine Grade Aluminum Shield With Handle Cutouts
- Closed Cell Neoprene Rubber Gaskets Installed on Bottom and Sides of Shield
- Anodized Aluminum Mounting Channels
- Universal Channels Can Install Inside or Outside Mount
- Dark Bronze/Black Anodized Mounting Channels Available (Specify)
- Stainless Steel Springs Provide Seal Compression
- #10 X $1\frac{1}{2}$ " Stainless Steel Sheet Metal Screws

* Complies with guidelines of the Federal Emergency Management Agency (FEMA) and Federal Insurance and Mitigation Administration (FIMA) for use on doors in flood prone areas.

Lengths up to 96" available

Over 50" a center support post is recommended
A threshold is recommended if sill is not smooth and clean


SKU	HEIGHT	
FS10	12" high	with 10" of flood protection
FS22	24" high	with 22" of flood protection
FS34	36" high	with 34" of flood protection

* Up to 96" wide

* Over 50" support post recommended



PROJECT:	
SUBMITTED BY:	
DATE:	
NOTES:	

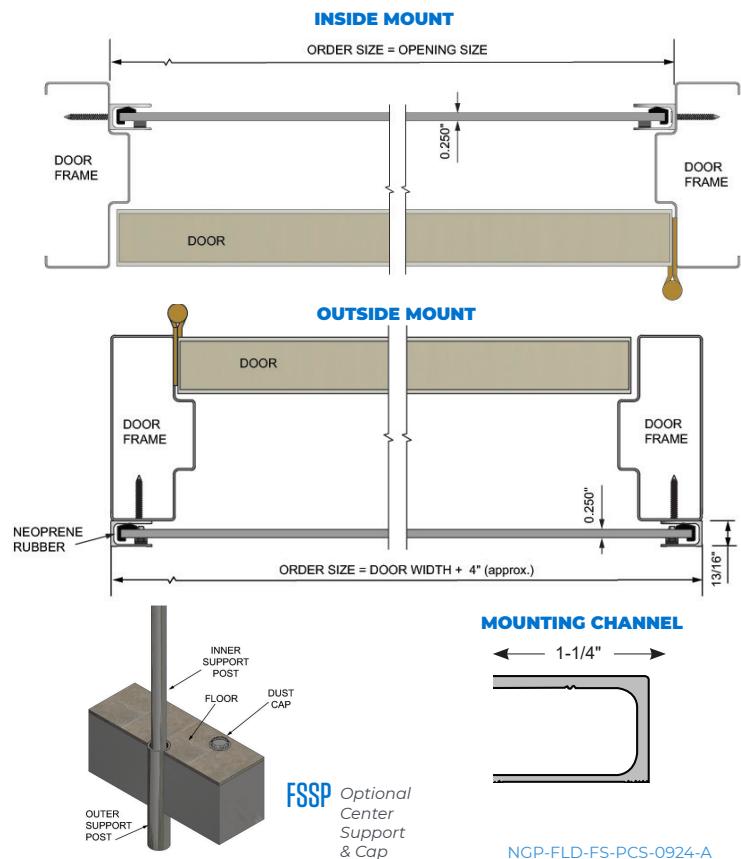

NATIONAL GUARD PRODUCTS, INC.

MEMPHIS

4985 East Raines Road
Memphis, TN 38118

CARSON CITY

3689 Arrowhead Drive
Carson City, NV 89706

Fax: (800) 255-7874
Email: info@ngp.com

Quotes: quotes@ngp.com
Orders: orders@ngp.com