


National Guard Products, Inc.

1-800-
647-7874



5021 Kerf Press-in Smoke Seal

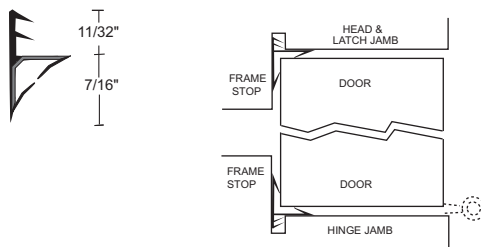

- * Seals against smoke, fire, air, sound and weather
- * Excellent compression; door latches easily

Installation Instructions

1. Fits Kerf 1/8" wide x 7/16" deep.
2. Measure and pre-cut pieces to fit the head and jambs.
3. Insert tail of seal into frame kerf.
4. Press seal firmly into kerf around entire door frame.
5. Make sure the seal does not impede proper closing and latching of the door.



CLASSIFIED
UL
UL 10C Positive Pressure Tested Gasketing Material for steel type fire doors rated up to 3 hours and wood type fire doors up to 1 1/2 hours.

Smoke & Draft control gasketing (Category H) tested to UL 1784; meets requirements of NFPA 105, IBC, intended for application to Classified 'S' label doors.

CLASSIFIED
UL
CLASSIFIED
ULC
UL10B Gasketing Material for Fire Doors. Intended for Application to Classified steel type fire doors rated up to 3 hours and wood type fire doors up to 1 1/2 hours.