
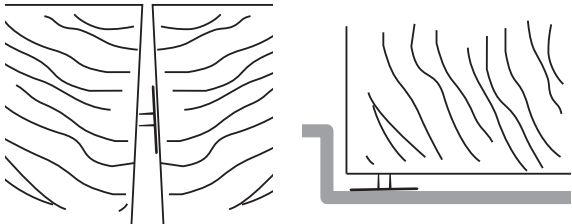


5070 Self Adhesive
Smoke Seal



- UL Tested and Classifed for Fire and Smoke Doors
- * Seals against smoke, air and weather
 - * Excellent compression; door latches easily

Installation Instructions

1. The surface temperature of the frame must be above 50° F. for the adhesive to bond.
2. Clean frame with clean wipe provided to remove dust, oil, grease and dirt. Wax coated or high gloss painted surfaces may require rough-ening of the surface with a scotch brite pad or sandpaper so adhesive will properly bond.
3. Measure and pre-cut pieces to fit where seal is to mount. 1/8" clearance required between door and frame.
4. Remove protective backing 1 to 2 feet at a time.
5. Position where illustrated for application required.
6. Adhere by pressing firmly (approx. 15 lbs. pressure required) straight down along entire length of gasketing. Do not remove and relocate.
WARNING: Do not rub along length from one end toward other end during installation as gasket will stretch and not adhere properly.
7. Make sure the seal does not impede proper closing and latching of the door.



Made in USA

CLASSIFIED
UL
731N1
UL 10C Positive Pressure Tested Gasketing Material for steel type fire doors rated up to 3 hours and wood type fire doors up to 1 1/2 hours.

Smoke & Draft control gasketing (Category H) tested to UL 1784; meets requirements of NFPA 105, IBC, intended for application to perimeter and/or meeting edge on Classified 'S' label doors.

CLASSIFIED
UL
731N1
CLASSIFIED
ULC
731N1
UL10B Gasketing Material for Fire Doors. Intended for Application to Classified steel type fire doors rated up to 3 hours and wood type fire doors up to 1 1/2 hours.

STORAGE AND SHELF LIFE
The adhesive on this seal has a shelf life of one year stored at 75° F and 50% relative humidity or less