


NGP-Edge® Sealing System/Smoke and Draft Control Gasketing Category “G” and “H” Classified



9450B Brown
9450C Charcoal



Intumescent with TPE Fin Fire and Smoke Seal



20, 45, 60, 90 minute rated category B wood doors
 perimeter application up to:

single swing 4'0 x 9'0

standard pair 8'0 x 9'0 use 9550 at the meeting edge





1/8" clearance required between door and frame


Available in 36", 48", 84", 96" and 108" lengths

Self-Adhesive

See adhesive specifications on page G9

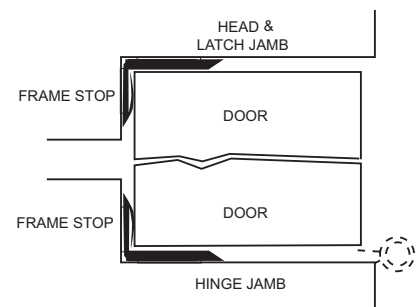

9550 Gray
9550DKB Brown

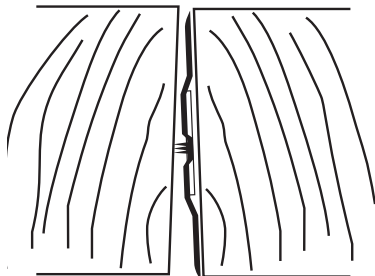

NGP-Edge® Intumescent with TPE Fins Fire and Smoke Seal



20, 45, 60, 90 minute rated category B wood doors up to:

single swing 4'0 x 9'0, perimeter application

pairs 8'0 x 9'0, perimeter/meeting edge




1/8" clearance required between doors and between door & frame

Available in 36", 48", 84", 96" and 108" lengths

Self-Adhesive


See adhesive specifications on page G9

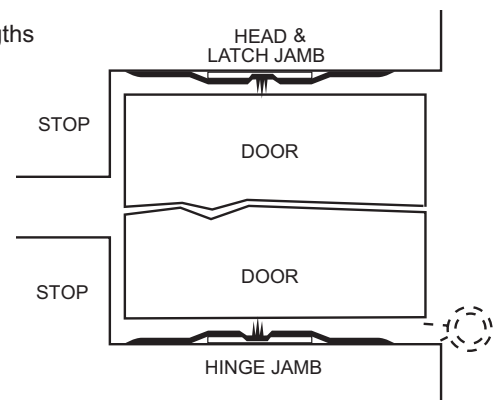

NGP-Edge® Sealing System/Smoke and Draft Control Gasketing Category 'G' and 'H' Classified



9850B Brown
9850C Charcoal



9750B Brown
9750C Charcoal

Intumescent with TPE Fire and Smoke Seal



20, 45, 60, 90 minute rated category B
wood doors perimeter application up to:

single swing 4'0 x 9'0
pairs 8'0 x 9'0




1/8" clearance required between door and frame

Available in 36", 48", 84", 96" and 108" lengths

Self-Adhesive

See adhesive specifications on page G9



9500DKB x 2525B Brown
9500 x 2525B Gray x Brown
9500 x 2525W Gray x White



20, 45, 60, 90 minute rated category B
wood doors perimeter application up to:

single swing 4'0 x 9'0
pairs 8'0 x 9'0




1/8" clearance required between door and frame

Available in 36", 48", 84", 96" and 108" lengths

Self-Adhesive

See adhesive specifications on page G9



9500DKB x 5020B Brown
9500 x 5020B Gray x Brown

