

Neoprene Seals

Properties:


- Synthetic rubber polymer blend: Polychloroprene and EPDM
- Very good abrasion resistance, tensile strength and memory
- Flame resistant
- Moisture resistant
- Temperature range -30°F to 250°F
- Good resistance to ozone, sunlight and aging.
- BHMA Certified to ANSI/BHMA A156.22 performance tests for Heat, Cold, Air Infiltration and Smoke Infiltration

#6 x 3/4" Stainless Steel Sheet Metal Screws furnished
Screw holes slotted for adjustment

All neoprene seals this section



Dense Bulbs

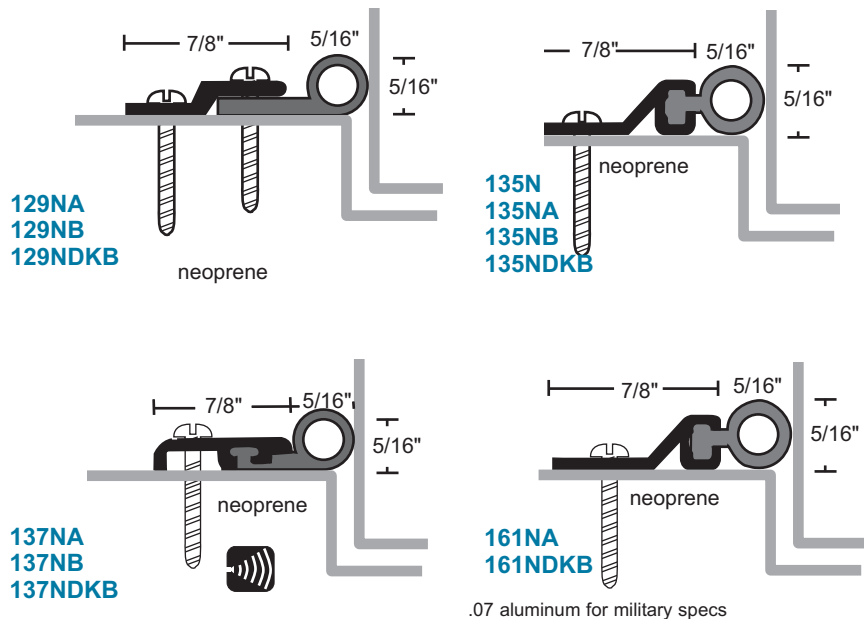


Polyurethane Seals

Properties:

- Very good abrasion resistance, tensile strength, memory and UV resistance.
- Flame resistant
- Moisture resistant
- Temperature range -65°F to 175°F

#6 x 3/4" Stainless Steel Sheet Metal Screws furnished
Screw holes slotted for adjustment

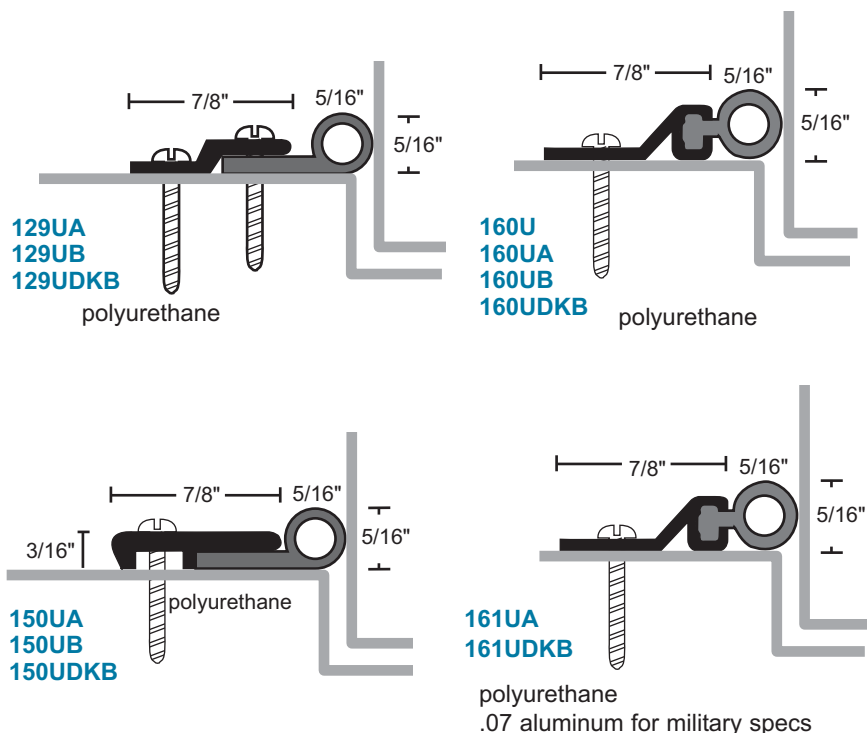

All polyurethane seals this section



A - clear
B - gold
DKB - dark bronze
no suffix - mill
neoprene is black
polyurethane is black