


Perimeter Seals Compatible with Parallel Arm Closers

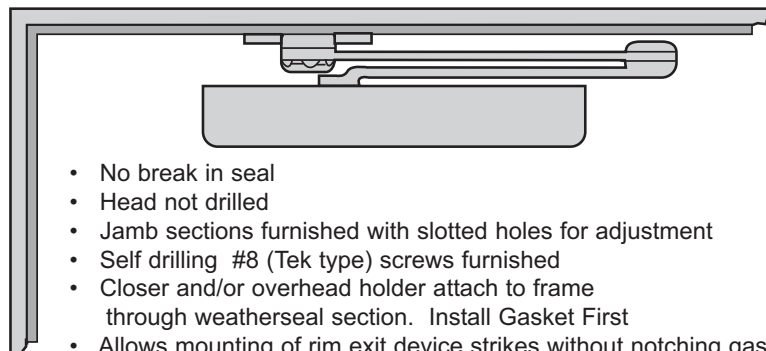

- No break in seal
- Head not drilled
- Jamb sections furnished with slotted holes for adjustment
- Self drilling #8 (Tek type) screws furnished
- Closer and/or overhead holder attach to frame through weatherseal section. Install Gasket First
- Allows mounting of rim exit device strikes without notching gasketing


A - clear
B - gold
DKB - dark bronze
no suffix - mill
vinyl & pile are gray
neoprene, silicone, & polyurethane are black, nylon+ & silicone+ are tan

700EN
700ENDKB




neoprene

700EU
700EUDKB

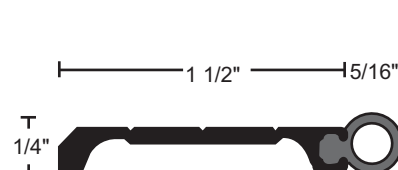


polyurethane

700ES
700ESDKB

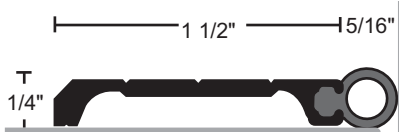


silicone

703EV
703EVDKB

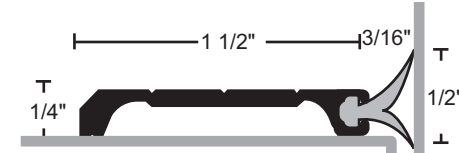


vinyl

701EP
701EPDKB

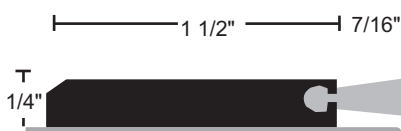


polypropylene pile

705EV
705EVDKB

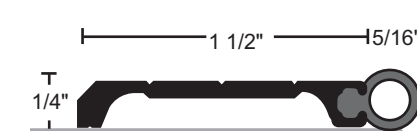

vinyl

706E
- gray brush
706EDKB
- black brush

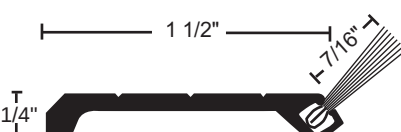


nylon
brush

704EV
704EVDKB



vinyl

9700E
9700EDKB

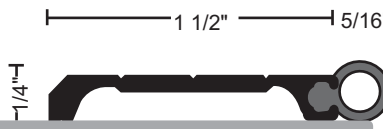

9706E
9706EDKB



nylon +