




Automatic Door Bottoms - Surface

- Use with a threshold for maximum sealing capability
- Nylon brush recommended for carpet applications where no threshold is provided
- Specify the exact net length required to avoid field sizing. Automatic Door Bottoms 36" and longer may be cut up to 4" in the field, under 36" should not be cut in the field, order net length
- Minimum length 11", maximum length 60" (except 780)
- End caps available - please specify. For 220, 221, 229, 310 end caps provide door handing

All products this page




silicone & vinyl are gray
neoprene is black
brush is gray with mill finish
and stainless steel; black
with gold, DKB and brass

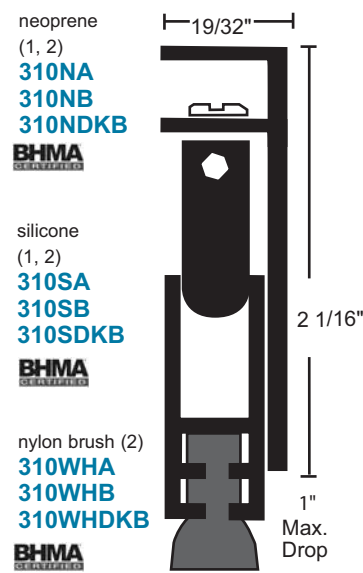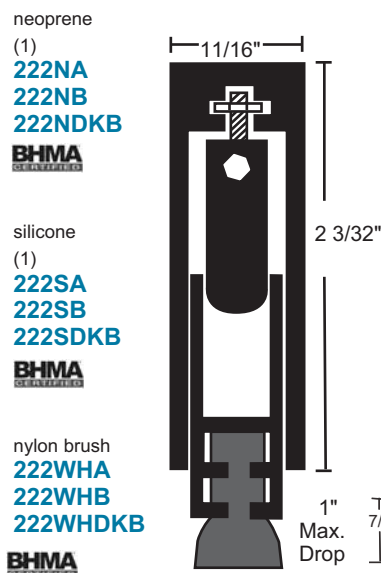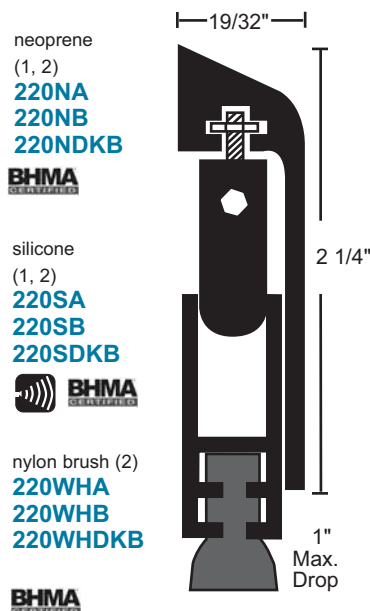

Drop Bar with Nylon
Brush - suffix "WH"



Slimline

**Endurance Tested to 5 Million
Cycles**

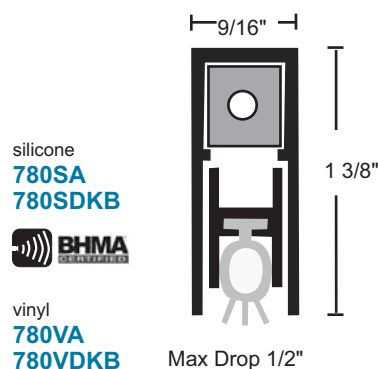

Available 23" to 96" in length
End caps furnished standard.
Will work half mortised on swing or sliding doors!

Brass and Stainless Steel

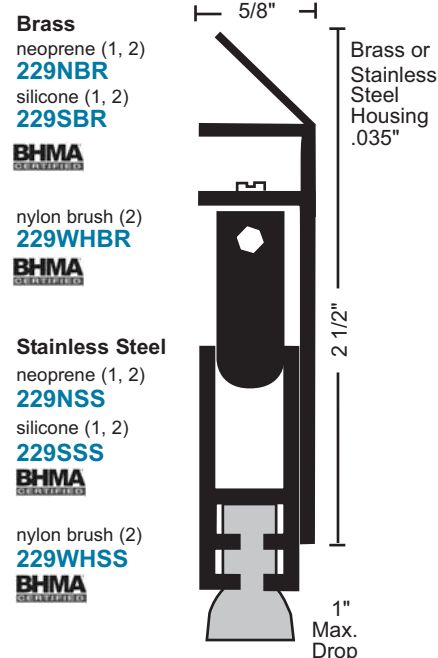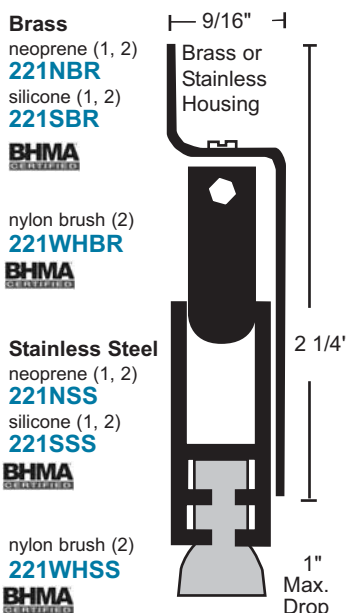

1. Lead insert available for radiation shield - specify "lead-lined"
2. Door Bottom is handed. Right hand supplied unless specified. Field reversible.