

Automatic Door Bottoms - Heavy Duty Mortise


- Use with a threshold for maximum sealing capability
- Nylon brush recommended for carpet applications where no threshold is provided
- Specify the exact net length required to avoid field sizing.
Automatic Door Bottoms 36" and longer may be cut up to 4" in the field, under 36" should not be cut in the field, order net length.
- Clear anodized end caps furnished standard. DKB end caps available - please specify

All products this section



neoprene is black
nylon brush is gray
#4 x 5/8" SMS furnished


Fits Wood Fire Door Mortise Restrictions

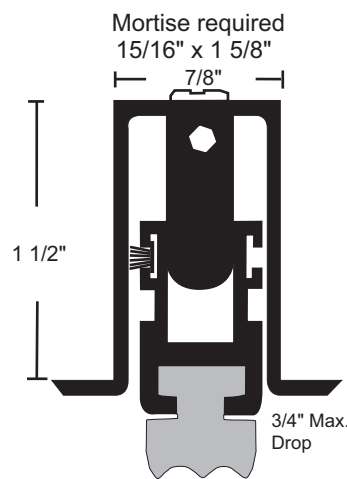

423N neoprene




Available 11" to 48" in length
Available with lead insert for radiation shield - Specify "lead-lined"

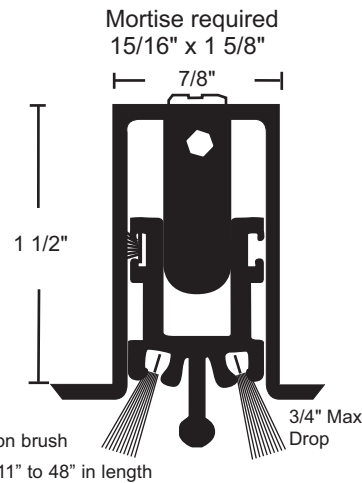

683 nylon brush


Available 11" to 48" in length

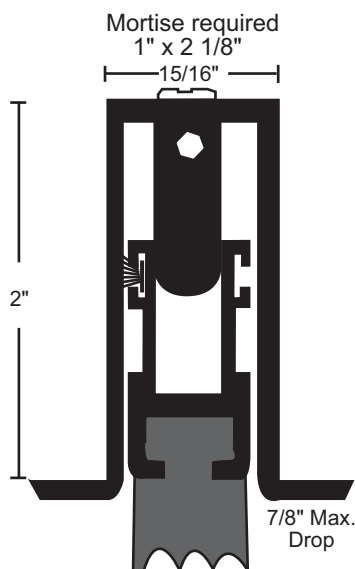

422N neoprene




Available 11" to 60" in length
Available with lead insert for radiation shield - specify "lead lined"

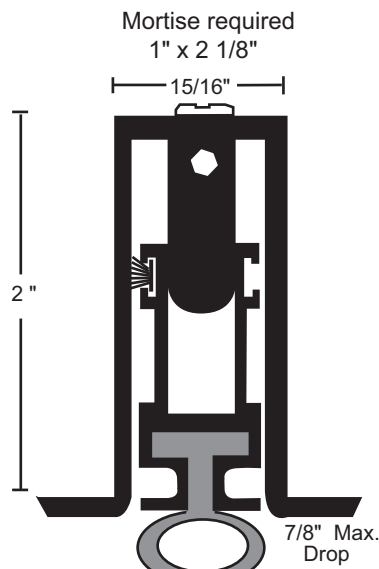

522N neoprene

Available 11" to 60" in length

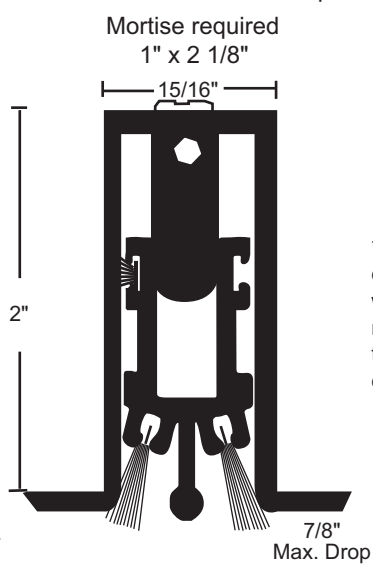

682 nylon brush

Available 11" to 60" in length

All products this section



*up to 3 hrs. metal doors, 45 minute wood doors (does not fit mortise restrictions of some wood door manufacturers)