



9590

Fire Door Bottom Gap Solution — *Up To 90 Minutes*

PRODUCT CUT SHEET

**UL Certified for Door Bottom
Gaps — Measuring up to 1½".**



- ▶ 90-Minute Rated — for use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- ▶ Restricts the Passage of Smoke
- ▶ Patent Pending
- ▶ Available in 36" and 48" Lengths
- ▶ End caps furnished standard
- ▶ Non-Handed


PRODUCT CONSISTS OF:

- + #304 Brushed Stainless Steel Neoprene Sweep — Pull Side
- + #304 Brushed Stainless Steel Intumescent Shoe — Push Side
- + #304 Brushed Stainless Steel End Caps
- + #6 X ¾" Stainless Steel SMS Furnished

FINISH:

Brushed Stainless Steel
Neoprene is black

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

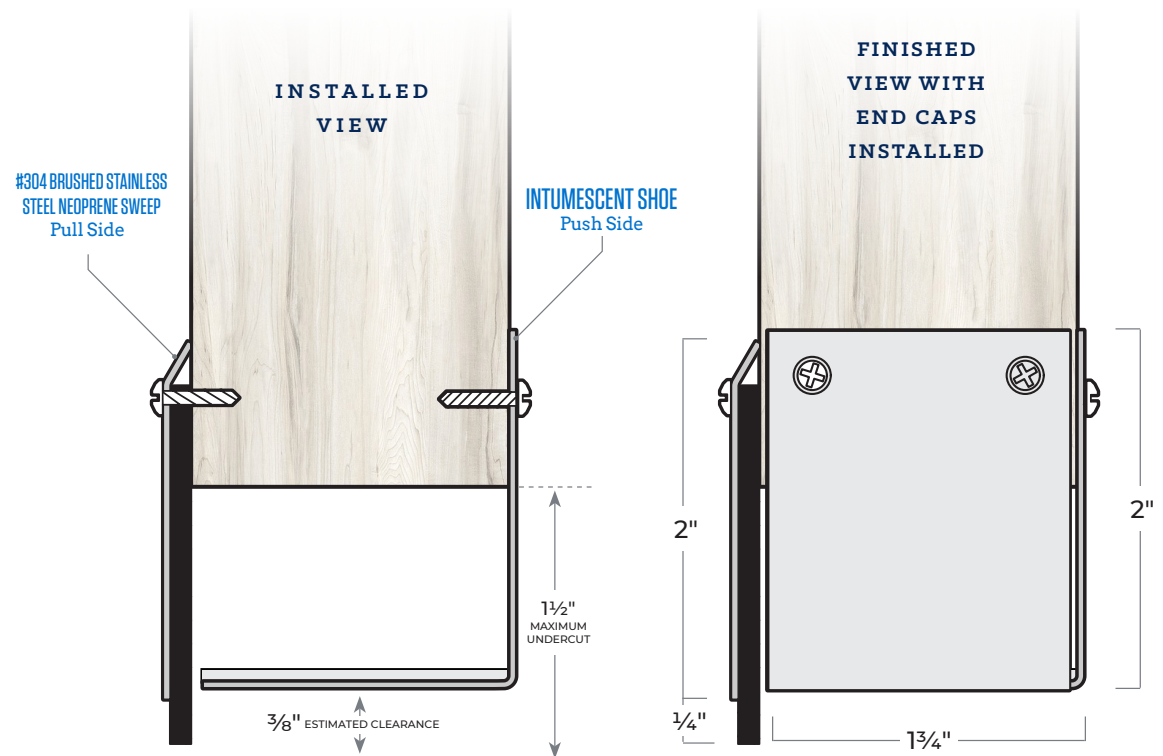

NGP-FDA-9590-PCS-0919-A