



FS10, FS22, FS34, FSSP

Flood Shield

PRODUCT CUT SHEET

Material

Anodized Aluminum Housing

- ▶ 1/4" Marine Grade Aluminum Shield With Handle Cutouts
- ▶ Closed Cell Neoprene Rubber Gaskets Installed on Bottom and Sides of Shield
- ▶ Anodized Aluminum Mounting Channels
- ▶ Universal Channels Can Install Inside or Outside Mount
- ▶ Dark Bronze Mounting Channels Available (Specify)
- ▶ Stainless Steel Springs Provide Seal Compression
- ▶ #10 X 1 1/2" Stainless Steel Sheet Metal Screws

* Complies with guidelines of the Federal Emergency Management Agency (FEMA) and Federal Insurance and Mitigation Administration (FIMA) for use on doors in flood prone areas.

Lengths up to 96" available
Over 50" a center support post is recommended
A threshold is recommended if sill is not smooth and clean

SKU	HEIGHT	
FS10	12" high	with 10" of flood protection
FS22	24" high	with 22" of flood protection
FS34	36" high	with 34" of flood protection


* Up to 96" wide
* Over 50" support post recommended



Universal Anodized Aluminum Channels can be Mounted to Inside or Outside of Frame



PROJECT:
SUBMITTED BY:
DATE:
NOTES:

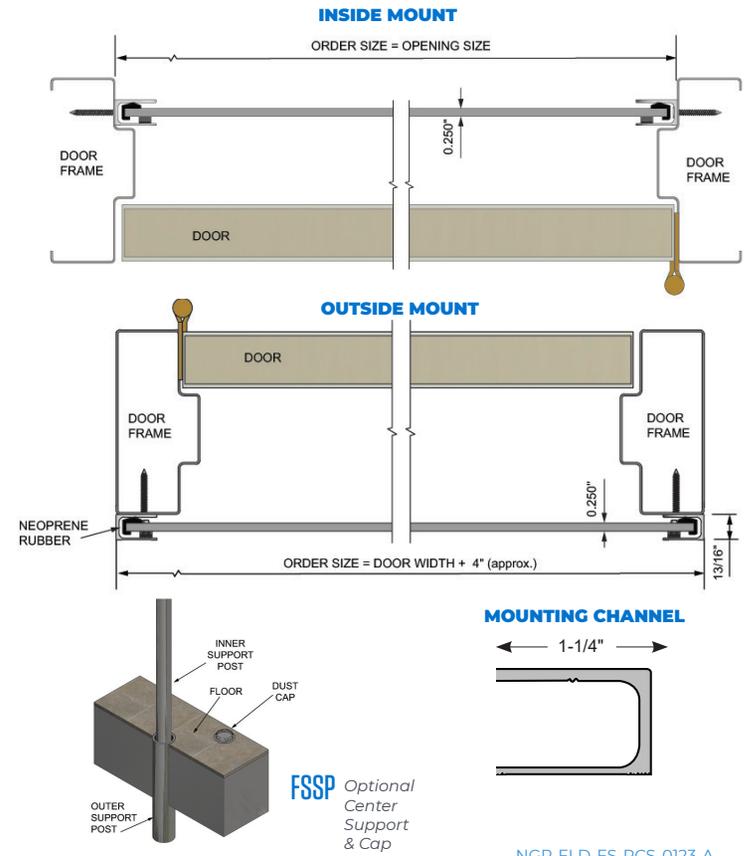

NGP-FLD-FS-PCS-0123-A

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

ngp.com
1-800-NGP-RUSH