





R50 .94 lbs./ft.

R50DKB .94 lbs./ft.



All products pages T24 and T25

Illustrations shown at 50%



R75 1.63 lbs./ft.

R75DKB 1.63 lbs./ft.




R100 2.06 lbs./ft.

R100DKB 2.06 lbs./ft.




R125 2.77 lbs./ft.

R125DKB 2.77 lbs./ft.

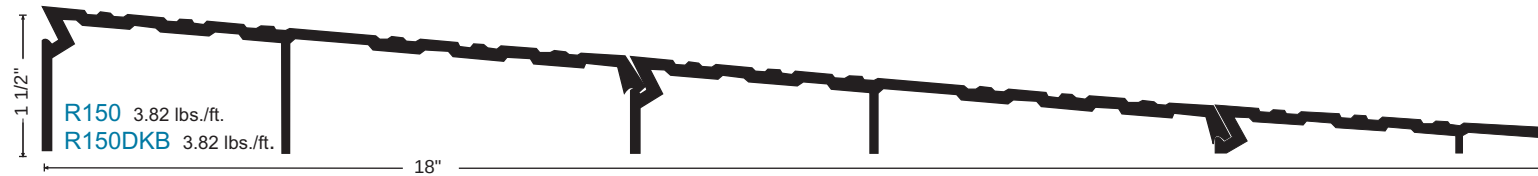


R150 3.82 lbs./ft.

R150DKB 3.82 lbs./ft.

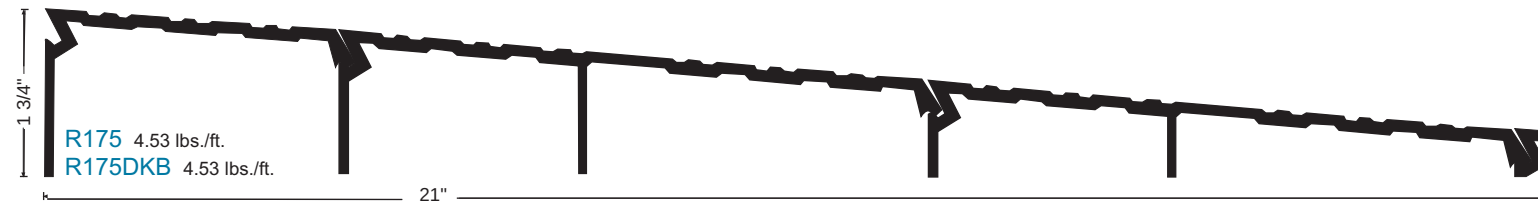


R175 4.53 lbs./ft.

R175DKB 4.53 lbs./ft.

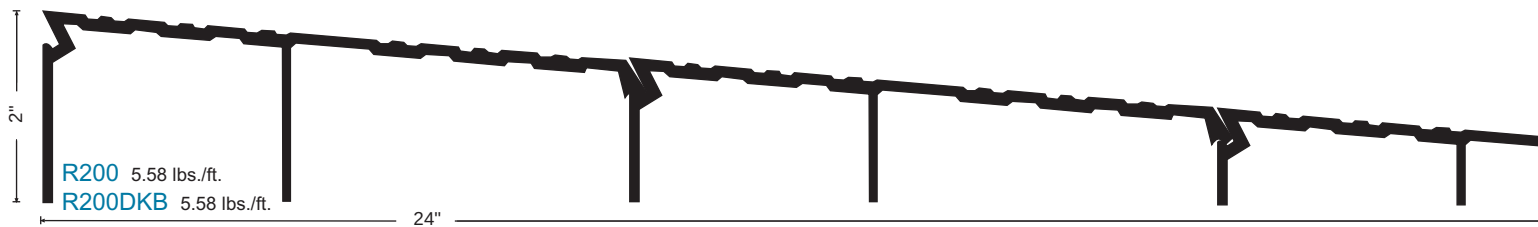


R200 5.58 lbs./ft.

R200DKB 5.58 lbs./ft.

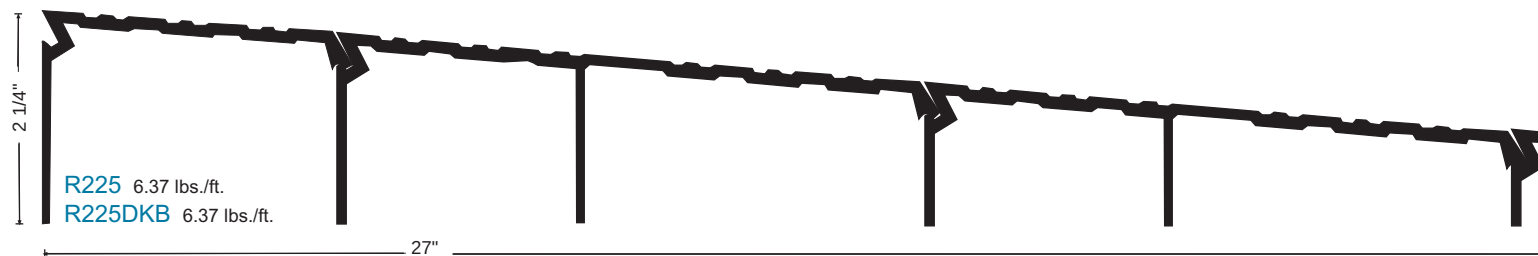

R225 6.37 lbs./ft.

R225DKB 6.37 lbs./ft.

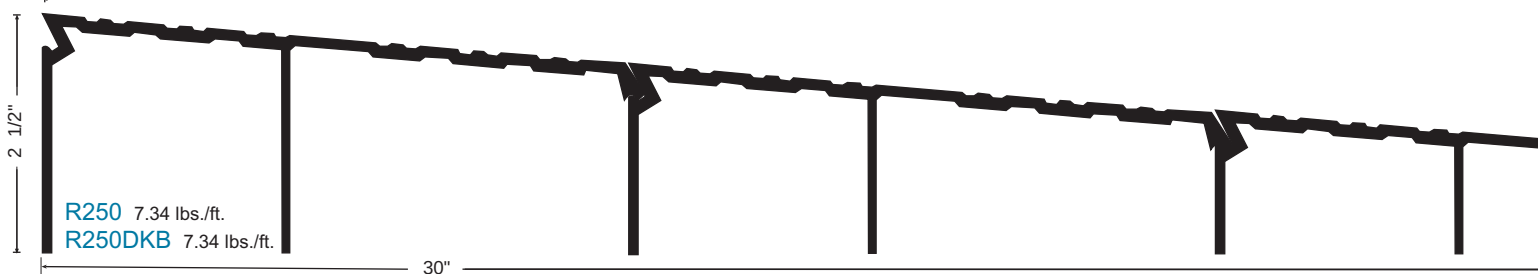

R250 7.34 lbs./ft.

R250DKB 7.34 lbs./ft.

ADA Compliant Interlocking Ramps

Return Closed Ends for Ramps


Return closed ends provide an attractive finished appearance to ramps. They are available in several lengths and can be trimmed to accommodate any size ramp assembly.




RCE's are also available with slip-resistant "SIA" finish (suffix "SIA").





RCE-9
RCE-9DKB

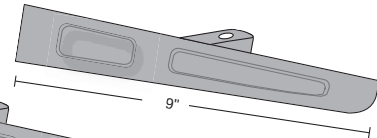

RCE-15
RCE-15DKB

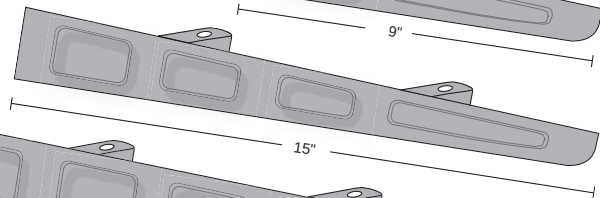

RCE-21
RCE-21DKB

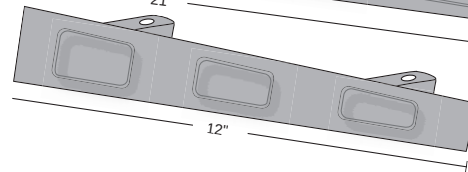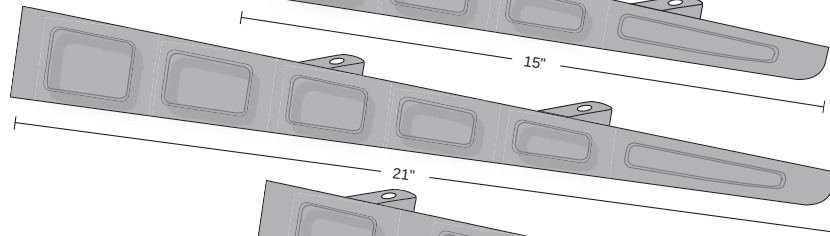

RCE-30 (includes RCE-21 + 12" extension)
RCE-30DKB (includes RCE-21 + 12" extension)

MATERIALS & FINISHES

- Aluminum mill finish
- DKB - Aluminum dark bronze finish



- Optional: Slip Resistant SIA Finish



ADA Compliant Interlocking Offset Ramps




All products pages T26 and T27



Available with Returned Closed Ends - See page T25

Slope = 1:12

Illustrations shown at 50%

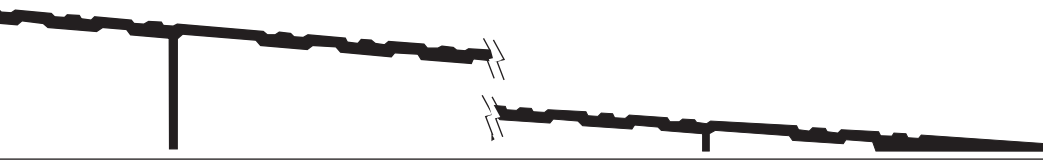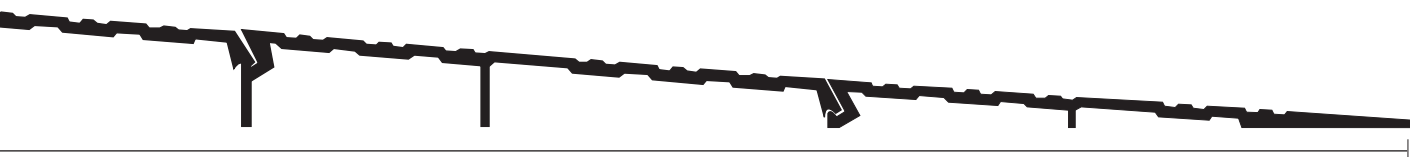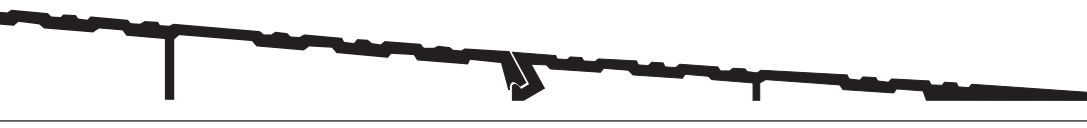

MATERIALS & FINISHES

- Aluminum mill finish
- DKB - Aluminum dark bronze finish



- Optional: Slip Resistant SIA Finish



Interlocking Ramp Components

Ramps Comply with:

- ADA Standards for Accessible Design
- ICC/ANSI A117.1 Accessible and Usable Buildings and Facilities

Requirements:


- Maximum Threshold Height = 1/2"
- Thresholds above 1/4" must be beveled with a slope no greater than 1:2
- Height changes over 1/2" require use of a ramp with slope not steeper than 1:12

All products this page




When installed as part of interlocking ramp assembly.

illustrations shown at 50%




R50 .94 lbs./ft.

R50DKB .94 lbs./ft.




953 .69 lbs./ft.

953DKB .69 lbs./ft.

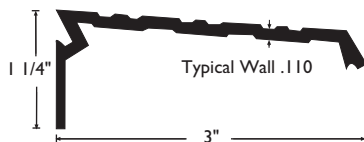


955 .71 lbs./ft.

955DKB .71 lbs./ft.

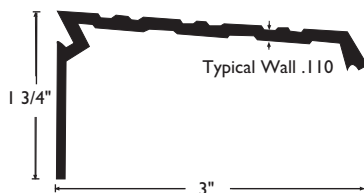


951 .71 lbs./ft.

951DKB .71 lbs./ft.

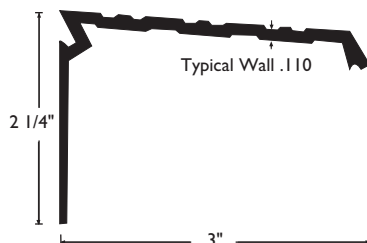


959 .79 lbs./ft.

959DKB .79 lbs./ft.




957 .93 lbs./ft.

957DKB .93 lbs./ft.

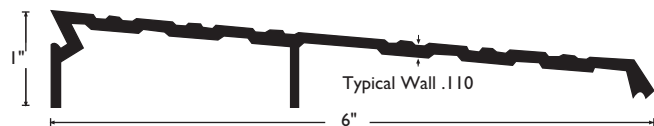


954 1.12 lbs./ft.

954DKB 1.12 lbs./ft.

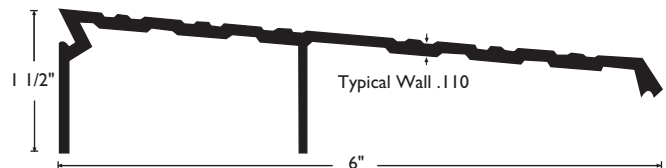


962 1.23 lbs./ft.

962DKB 1.23 lbs./ft.

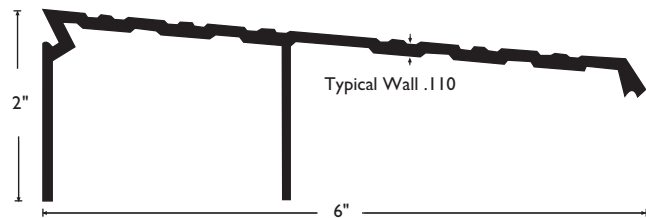

961 1.34 lbs./ft.

961DKB 1.34 lbs./ft.

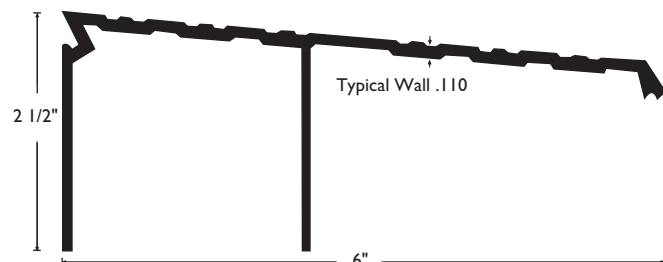


960 1.76 lbs./ft.


960DKB 1.76 lbs./ft.

Aluminum Ramps

All aluminum ramps this section

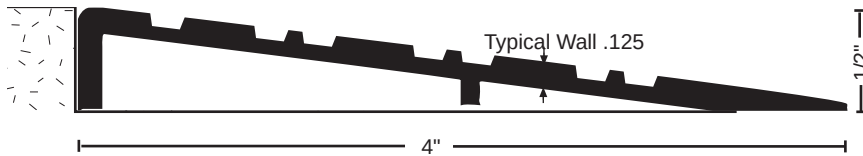

654 .53 lbs./ft.
654DKB .53 lbs./ft.

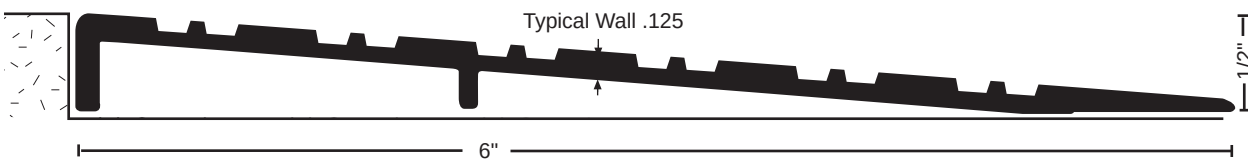

657 .86 lbs./ft.
657DKB .86 lbs./ft.



MATERIALS & FINISHES

- Aluminum mill finish
- DKB - Aluminum dark bronze finish



- Optional: Slip Resistant SIA Finish

Interlocking Rubber Ramps

- Supplied with beveled ends - (end slope = 1:2). Specify if straight cut is required.
- Rubber ramp sections may be combined with aluminum ramp components for higher rises, or with 6" flat aluminum interlocking threshold #957 for offset conditions.
- Black silicone adhesive available to secure ramps without fasteners. Specify RR5007BL, each tube will secure 2 ramps 12" wide x 36" long (6 square feet.)



RR42 3.4 lbs./ft.
maximum length = 118"



RR952 1.0 lbs./ft.
maximum length = 120"



Slope = 1:12
Illustrations shown at 50%